




Weld Nuts/Round Nuts with Holes

IEC's *weld/hole nuts* allow a nail, drive screw or rivet to hold the threaded nut in place for wood applications. The holes also provide an anchoring point for parts molded of plastic, allowing the plastic to flow through the holes. In metal applications, the nut can be welded or riveted in place.





ROUND NUTS WITH HOLES (2 OR 3 HOLES)

Highly Stocked	Part Number	Thread Size	(A) Flange Dia.	(B) Barrel Height	(D) Barrel Dia.	Hole Dia.	(C) Flange Thickness
★	IL28-1H	6-32	9/16	1/4	.162	.075	.024
★	IL28-2H	8-32	23/32	1/4	.208	.098	.031
	IL28-3AH	10-24	3/4	9/32	.243	.098	.039
	IL28-3AH2	10-24	3/4	5/16	.243	.098	.039
★	IL28-3H	10.32	3/4	9/32	.243	.098	.039
	IL28-4H2	1/4-20	3/4	1/4	.305	.098	.047
★	IL28-4H	1/4-20	3/4	5/16	.305	.098	.047
★	IL28-M6H	M6x1.0	19.1	7.9	7.7	2.5	1.2
	IL28-4H3	1/4-20	3/4	7/16	.305	.098	.047
	IL28-4H4	1/4-20	3/4	9/16	.305	.098	.047
	IL28-M6H2	M6x1.0	19.1	14.3	7.7	2.5	1.2
	IL28-4H5	1/4-20	3/4	7/8	.305	.098	.047
★	IL28-5H	5/16-18	7/8	3/8	.370	.098	.055
★	IL28-M8H	M8x1.25	22.2	9.5	9.4	2.5	1.4
	IL28-5H2	5/16-18	7/8	5/8	.370	.098	.055
	IL28-M8H2	M8x1.25	22.2	15.9	9.4	2.5	1.4
	IL28-5H3	5/16-18	7/8	7/8	.375	.098	.059
	IL28-5AH	5/16-24	7/8	3/8	.390	.098	.063
★	IL28-6H	3/8-16	1	7/16	.440	.145	.063
★	IL28-M10H	M10x1.5	25.4	11.1	11.5	3.7	1.6
	IL28-6H2	3/8-16	1-1/4	3/4	.464	.145	.071
★	IL28-7H	1/2-13	1-1/4	3/8	.591	.145	.091
★	IL28-8H	5/8-11	1-7/16	3/8	.720	.145	.091

Weld & Injection Molding Nuts

These Hex Base weld nuts and injection molding nuts are available in steel and stainless steel. The steel nuts are zinc plated. The total height is machined to a tight tolerance to be suitable for injection molding applications. They can also be used for hex based leveler applications by installing a threaded stud into the nut, thereby creating a low profile leveler of any thread length.

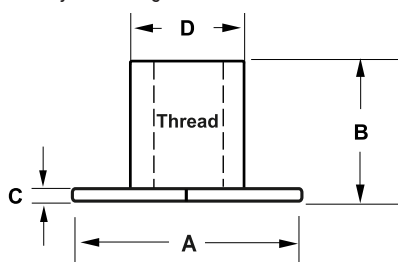

Part Number	S.S.	Thread Size	(A) Flange Dia.	(B) Total Height	(D) Barrel Dia.	(C) Flange Thickness
15A-Weld Nuts, Hex Base						
IL40-6T	IL40-6T-SS	3/8-16	7/8	.510	5/8	1/8
IL40-7T	IL40-7T-SS	1/2-13	7/8	.510	5/8	1/8