





KNOB STYLE GLIDES

The IEC Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.



Many colors available as custom option.


 Top Hex (-HX)
and Slot (-SL)

36 - Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.



Steel	SS	Load	Thread	A	B	C
36-Steel and Stainless Steel Knob Style (PVC Base) Glides						
IL82-4Bx1/4-PVC	IL82-4BSx1/4-PVC	100	1/4-20	1-1/2	1/4	3/8
IL82-4Bx1/2-PVC	IL82-4BSx1/2-PVC	100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx1-PVC	IL82-4BSx1-PVC	100	1/4-20	1-1/2	1	3/8
IL82-4Bx125-PVC	IL82-4BSx125-PVC	100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx175-PVC	IL82-4BSx175-PVC	100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx2-PVC	IL82-4BSx2-PVC	100	1/4-20	1-1/2	2	3/8
IL82-4Bx275-PVC	IL82-4BSx275-PVC	100	1/4-20	1-1/2	2-3/4	3/8
IL82-5Bx1/2-PVC	IL82-5BSx1/2-PVC	100	5/16-18	1-1/2	1/2	3/8
IL82-5Bx1-PVC	IL82-5BSx1-PVC	100	5/16-18	1-1/2	1	3/8
IL82-5Bx125-PVC	IL82-5BSx125-PVC	100	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx175-PVC	IL82-5BSx175-PVC	100	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx225-HX-SL-PVC	IL82-5BSx225-HX-SL-PVC	100	5/16-18	1-1/2	2-1/4	3/8
IL82-6Bx1/2-PVC	IL82-6BSx1/2-PVC	100	3/8-16	1-1/2	1/2	3/8
IL82-6Bx1-PVC	IL82-6BSx1-PVC	100	3/8-16	1-1/2	1	3/8
IL82-6Bx125-PVC	IL82-6BSx125-PVC	100	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx175-PVC	IL82-6BSx175-PVC	100	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx238-PVC	IL82-6BSx238-PVC	100	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx275-HX-SL-PVC	IL82-6BSx275-HX-SL-PVC	100	3/8-16	1-1/2	2-3/4	3/8
IL82-6Bx338-HX-SL-PVC	IL82-6BSx338-HX-SL-PVC	100	3/8-16	1-1/2	3-3/8	3/8
IL84-4Bx1/4-PVC	IL84-4BSx1/4-PVC	100	1/4-20	2	1/4	3/8
IL84-4Bx1/2-PVC	IL84-4BSx1/2-PVC	100	1/4-20	2	1/2	3/8
IL84-4Bx1-PVC	IL84-4BSx1-PVC	100	1/4-20	2	1	3/8
IL84-4Bx125-PVC	IL84-4BSx125-PVC	100	1/4-20	2	1-1/4	3/8
IL84-4Bx175-PVC	IL84-4BSx175-PVC	100	1/4-20	2	1-3/4	3/8
IL84-4Bx2-PVC	IL84-4BSx2-PVC	100	1/4-20	2	2	3/8
IL84-4Bx275-PVC	IL84-4BSx275-PVC	100	1/4-20	2	2-3/4	3/8
IL84-5Bx1/2-PVC	IL84-5BSx1/2-PVC	100	5/16-18	2	1/2	3/8
IL84-5Bx1-PVC	IL84-5BSx1-PVC	100	5/16-18	2	1	3/8
IL84-5Bx125-PVC	IL84-5BSx125-PVC	100	5/16-18	2	1-1/4	3/8
IL84-5Bx175-PVC	IL84-5BSx175-PVC	100	5/16-18	2	1-3/4	3/8
IL84-5Bx225-HX-SL-PVC	IL84-5BSx225-HX-SL-PVC	100	5/16-18	2	2-1/4	3/8
IL84-6Bx1/2-PVC	IL84-6BSx1/2-PVC	100	3/8-16	2	1/2	3/8
IL84-6Bx1-PVC	IL84-6BSx1-PVC	100	3/8-16	2	1	3/8
IL84-6Bx125-PVC	IL84-6BSx125-PVC	100	3/8-16	2	1-1/4	3/8
IL84-6Bx175-PVC	IL84-6BSx175-PVC	100	3/8-16	2	1-3/4	3/8
IL84-6Bx238-PVC	IL84-6BSx238-PVC	100	3/8-16	2	2-3/8	3/8
IL84-6Bx275-HX-SL-PVC	IL84-6BSx275-HX-SL-PVC	100	3/8-16	2	2-3/4	3/8
IL84-6Bx338-HX-SL-PVC	IL84-6BSx338-HX-SL-PVC	100	3/8-16	2	3-3/8	3/8

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL82-4Bx1/4	IL82-4BSx1/4	100	1/4-20	1-1/2	1/4	3/8
IL82-4Bx1/2	IL82-4BSx1/2	100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx1/2-HX-SL		100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx3/4	IL82-4BSx3/4	100	1/4-20	1-1/2	3/4	3/8
IL82-4Bx3/4-HX-SL		100	1/4-20	1-1/2	3/4	3/8
IL82-4Bx1	IL82-4BSx1	100	1/4-20	1-1/2	1	3/8
IL82-4Bx1-HX-SL		100	1/4-20	1-1/2	1	3/8
IL82-4Bx125	IL82-4BSx125	100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx125-HX-SL		100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx150	IL82-4BSx150	100	1/4-20	1-1/2	1-1/2	3/8
IL82-4Bx175	IL82-4BSx175	100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx175-HX-SL		100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx2	IL82-4BSx2	100	1/4-20	1-1/2	2	3/8
IL82-4Bx275	IL82-4BSx275	100	1/4-20	1-1/2	2-3/4	3/8
IL82-5Bx1/4	IL82-5BSx1/4	500	5/16-18	1-1/2	1/4	3/8
IL82-5Bx1/2	IL82-5BSx1/2	500	5/16-18	1-1/2	1/2	3/8
IL82-5Bx1/2-HX-SL		500	5/16-18	1-1/2	1/2	3/8
IL82-5Bx3/4	IL82-5BSx3/4	500	5/16-18	1-1/2	3/4	3/8
IL82-5Bx3/4-HX-SL		500	5/16-18	1-1/2	3/4	3/8
IL82-5Bx1	IL82-5BSx1	500	5/16-18	1-1/2	1	3/8
IL82-5Bx1-HX-SL		500	5/16-18	1-1/2	1	3/8
IL82-5Bx125-HX-SL		500	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx125	IL82-5BSx125	500	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx175	IL82-5BSx175	500	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx175-HX-SL		500	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx225-HX-SL		500	5/16-18	1-1/2	2-1/4	3/8
IL82-6Bx1/4	IL82-6BSx1/4	1000	3/8-16	1-1/2	1/4	3/8
IL82-6Bx1/2	IL82-6BSx1/2	1000	3/8-16	1-1/2	1/2	3/8
IL82-6Bx1/2-HX-SL		1000	3/8-16	1-1/2	1/2	3/8
IL82-6Bx3/4-HX-SL		1000	3/8-16	1-1/2	3/4	3/8
IL82-6Bx1	IL82-6BSx1	1000	3/8-16	1-1/2	1	3/8
IL82-6Bx1-HX-SL		1000	3/8-16	1-1/2	1	3/8
IL82-6Bx125	IL82-6BSx125	1000	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx125-HX-SL		1000	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx150	IL82-6BSx150	1000	3/8-16	1-1/2	1-1/2	3/8
IL82-6Bx175-HX-SL		1000	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx175	IL82-6BSx175	1000	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx238	IL82-6BSx238	1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx238-SL		1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx238-HX-SL		1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx275-HX-SL		1000	3/8-16	1-1/2	2-3/4	3/8
IL82-6Bx338-HX-SL		1000	3/8-16	1-1/2	3-3/8	3/8
IL82-7Bx3/4	IL82-7BSx3/4	1500	1/2-13	1-1/2	3/4	3/8
IL82-7Bx1	IL82-7BSx1	1500	1/2-13	1-1/2	1	3/8
IL82-7Bx125	IL82-7BSx125	1500	1/2-13	1-1/2	1-1/4	3/8
IL82-7Bx150	IL82-7BSx150	1500	1/2-13	1-1/2	1-1/2	3/8
IL82-7Bx2	IL82-7BSx2	1500	1/2-13	1-1/2	2	3/8
IL82-7Bx238		1500	1/2-13	1-1/2	2-3/8	3/8
IL82-7Bx238-HX		1500	1/2-13	1-1/2	2-3/8	3/8
IL82-7Bx278	IL82-7BSx278	1500	1/2-13	1-1/2	2-7/8	3/8
IL82-7Bx338		1500	1/2-13	1-1/2	3	3/8
IL84-4Bx1/4	IL84-4BSx1/4	100	1/4-20	2	1/4	3/8
IL84-4Bx1/2	IL84-4BSx1/2	100	1/4-20	2	1/2	3/8
IL84-4Bx1/2-HX-SL		100	1/4-20	2	1/2	3/8
IL84-4Bx3/4	IL84-4BSx3/4	100	1/4-20	2	3/4	3/8
IL84-4Bx3/4-HX-SL		100	1/4-20	2	3/4	3/8
IL84-4Bx1	IL84-4BSx1	100	1/4-20	2	1	3/8
IL84-4Bx1-HX-SL		100	1/4-20	2	1	3/8
IL84-4Bx125	IL84-4BSx125	100	1/4-20	2	1-1/4	3/8
IL84-4Bx125-HX-SL		100	1/4-20	2	1-1/4	3/8
IL84-4Bx150	IL84-4BSx150	100	1/4-20	2	1-1/2	3/8
IL84-4Bx175	IL84-4BSx175	100	1/4-20	2	1-3/4	3/8
IL84-4Bx175-HX-SL		100	1/4-20	2	1-3/4	3/8
IL84-4Bx2	IL84-4BSx2	100	1/4-20	2	2	3/8
IL84-4Bx275	IL84-4BSx275	100	1/4-20	2	2-3/4	3/8
IL84-5Bx1/4	IL84-5BSx1/4	500	5/16-18	2	1/4	3/8
IL84-5Bx1/2	IL84-5BSx1/2	500	5/16-18	2	1/2	3/8
IL84-5Bx1/2-HX-SL		500	5/16-18	2	1/2	3/8
IL84-5Bx3/4	IL84-5BSx3/4	500	5/16-18	2	3/4	3/8
IL84-5Bx3/4-HX-SL		500	5/16-18	2	3/4	3/8
IL84-5Bx1	IL84-5BSx1	500	5/16-18	2	1	3/8
IL84-5Bx1-HX-SL		500	5/16-18	2	1	3/8
IL84-5Bx125-HX-SL		500	5/16-18	2	1-1/4	3/8
IL84-5Bx125	IL84-5BSx125	500	5/16-18	2	1-1/4	3/8
IL84-5Bx175	IL84-5BSx175	500	5/16-18	2	1-3/4	3/8
IL84-5Bx175-HX-SL		500	5/16-18	2	1-3/4	3/8
IL84-5Bx225-HX-SL		500	5/16-18	2	2-1/4	3/8



KNOB STYLE GLIDES


The IEC Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, instruments, racks and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.

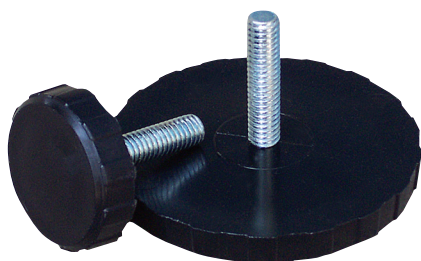
 Top Hex (-HX)
and Slot (-SL)


Many colors available as custom option.

Threaded Nylon Knob Hubs/Sleeves

These glass-filled black nylon threaded knob hubs can be used for many applications; as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used by themselves to create a "thru-hole" knob or as a locking nut.



* Patent Pending

BLACK NYLON THREADED KNOB HUBS


P/N	THREAD	DIA.	HEIGHT
IL80-HUB-4	1/4-20	1"	3/8
IL80-HUB-5	5/16-18	1"	3/8
IL80-HUB-6	3/8-16	1"	3/8
IL80A-HUB-4	1/4-20	1"	3/4
IL80A-HUB-5	5/16-18	1"	3/4
IL80A-HUB-6	3/8-16	1"	3/4

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL84-6Bx1/4	IL84-6BSx1/4	1000	3/8-16	2	1/4	3/8
IL84-6Bx1/2	IL84-6BSx1/2	1000	3/8-16	2	1/2	3/8
IL84-6Bx1/2-HX-SL		1000	3/8-16	2	1/2	3/8
IL84-6Bx3/4-HX-SL		1000	3/8-16	2	3/4	3/8
IL84-6Bx1	IL84-6BSx1	1000	3/8-16	2	1	3/8
IL84-6Bx1-HX-SL		1000	3/8-16	2	1	3/8
IL84-6Bx125	IL84-6BSx125	1000	3/8-16	2	1-1/4	3/8
IL84-6Bx125-HX-SL		1000	3/8-16	2	1-1/4	3/8
IL84-6Bx150	IL84-6BSx150	1000	3/8-16	2	1-1/2	3/8
IL84-6Bx175-HX-SL		1000	3/8-16	2	1-3/4	3/8
IL84-6Bx175	IL84-6BSx175	1000	3/8-16	2	1-3/4	3/8
IL84-6Bx238	IL84-6BSx238	1000	3/8-16	2	2-3/8	3/8
IL84-6Bx238-SL		1000	3/8-16	2	2-3/8	3/8
IL84-6Bx238-HX-SL		1000	3/8-16	2	2-3/8	3/8
IL84-6Bx275-HX-SL		1000	3/8-16	2	2-3/4	3/8
IL84-6Bx338-HX-SL		1000	3/8-16	2	3-3/8	3/8
IL84-7Bx3/4	IL84-7BSx3/4	1500	1/2-13	2	3/4	3/8
IL84-7Bx1	IL84-7BSx1	1500	1/2-13	2	1	3/8
IL84-7Bx125	IL84-7BSx125	1500	1/2-13	2	1-1/4	3/8
IL84-7Bx150	IL84-7BSx150	1500	1/2-13	2	1-1/2	3/8
IL84-7Bx2	IL84-7BSx2	1500	1/2-13	2	2	3/8
IL84-7Bx238		1500	1/2-13	2	2-3/8	3/8
IL84-7Bx238-HX		1500	1/2-13	2	2-3/8	3/8
IL84-7Bx278	IL84-7BSx278	1500	1/2-13	2	2-7/8	3/8
IL84-7Bx3-HX		1500	1/2-13	2	3	3/8
IL86-4Bx1/4	IL86-4BSx1/4	100	1/4-20	2-1/2	1/4	3/8
IL86-4Bx1/2	IL86-4BSx1/2	100	1/4-20	2-1/2	1/2	3/8
IL86-4Bx1/2-HX-SL		100	1/4-20	2-1/2	1/2	3/8
IL86-4Bx3/4	IL86-4BSx3/4	100	1/4-20	2-1/2	3/4	3/8
IL86-4Bx3/4-HX-SL		100	1/4-20	2-1/2	3/4	3/8
IL86-4Bx1	IL86-4BSx1	100	1/4-20	2-1/2	1	3/8
IL86-4Bx1-HX-SL		100	1/4-20	2-1/2	1	3/8
IL86-4Bx125	IL86-4BSx125	100	1/4-20	2-1/2	1-1/4	3/8
IL86-4Bx125-HX-SL		100	1/4-20	2-1/2	1-1/4	3/8
IL86-4Bx150	IL86-4BSx150	100	1/4-20	2-1/2	1-1/2	3/8
IL86-4Bx175	IL86-4BSx175	100	1/4-20	2-1/2	1-3/4	3/8
IL86-4Bx175-HX-SL		100	1/4-20	2-1/2	1-3/4	3/8
IL86-4Bx2	IL86-4BSx2	100	1/4-20	2-1/2	2	3/8
IL86-4Bx275	IL86-4BSx275	100	1/4-20	2-1/2	2-3/4	3/8
IL86-5Bx1/4	IL86-5BSx1/4	500	5/16-18	2-1/2	1/4	3/8
IL86-5Bx1/2	IL86-5BSx1/2	500	5/16-18	2-1/2	1/2	3/8
IL86-5Bx1/2-HX-SL		500	5/16-18	2-1/2	1/2	3/8
IL86-5Bx3/4	IL86-5BSx3/4	500	5/16-18	2-1/2	3/4	3/8
IL86-5Bx3/4-HX-SL		500	5/16-18	2-1/2	3/4	3/8
IL86-5Bx1	IL86-5BSx1	500	5/16-18	2-1/2	1	3/8
IL86-5Bx1-HX-SL		500	5/16-18	2-1/2	1	3/8
IL86-5Bx125-HX-SL		500	5/16-18	2-1/2	1-1/4	3/8
IL86-5Bx125	IL86-5BSx125	500	5/16-18	2-1/2	1-1/4	3/8
IL86-5Bx175	IL86-5BSx175	500	5/16-18	2-1/2	1-3/4	3/8
IL86-5Bx175-HX-SL		500	5/16-18	2-1/2	1-3/4	3/8
IL86-5Bx225-HX-SL		500	5/16-18	2-1/2	2-1/4	3/8
IL86-6Bx1/4	IL86-6BSx1/4	1000	3/8-16	2-1/2	1/4	3/8
IL86-6Bx1/2	IL86-6BSx1/2	1000	3/8-16	2-1/2	1/2	3/8
IL86-6Bx1/2-HX-SL		1000	3/8-16	2-1/2	1/2	3/8
IL86-6Bx3/4-HX-SL		1000	3/8-16	2-1/2	3/4	3/8
IL86-6Bx1	IL86-6BSx1	1000	3/8-16	2-1/2	1	3/8
IL86-6Bx1-HX-SL		1000	3/8-16	2-1/2	1	3/8
IL86-6Bx125	IL86-6BSx125	1000	3/8-16	2-1/2	1-1/4	3/8
IL86-6Bx125-HX-SL		1000	3/8-16	2-1/2	1-1/4	3/8
IL86-6Bx150	IL86-6BSx150	1000	3/8-16	2-1/2	1-1/2	3/8
IL86-6Bx175-HX-SL		1000	3/8-16	2-1/2	1-3/4	3/8
IL86-6Bx175	IL86-6BSx175	1000	3/8-16	2-1/2	1-3/4	3/8
IL86-6Bx238	IL86-6BSx238	1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx238-SL		1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx238-HX-SL		1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx275-HX-SL		1000	3/8-16	2-1/2	2-3/4	3/8
IL86-6Bx338-HX-SL		1000	3/8-16	2-1/2	3-3/8	3/8
IL86-7Bx3/4	IL86-7BSx3/4	1500	1/2-13	2-1/2	3/4	3/8
IL86-7Bx1	IL86-7BSx1	1500	1/2-13	2-1/2	1	3/8
IL86-7Bx125	IL86-7BSx125	1500	1/2-13	2-1/2	1-1/4	3/8
IL86-7Bx150	IL86-7BSx150	1500	1/2-13	2-1/2	1-1/2	3/8
IL86-7Bx2	IL86-7BSx2	1500	1/2-13	2-1/2	2	3/8
IL86-7Bx238		1500	1/2-13	2-1/2	2-3/8	3/8
IL86-7Bx238-HX		1500	1/2-13	2-1/2	2-3/8	3/8
IL86-7Bx278	IL86-7BSx278	1500	1/2-13	2-1/2	2-7/8	3/8
IL86-7Bx3-HX		1500	1/2-13	2-1/2	3	3/8



KNOB STYLE GLIDES

The IEC Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.

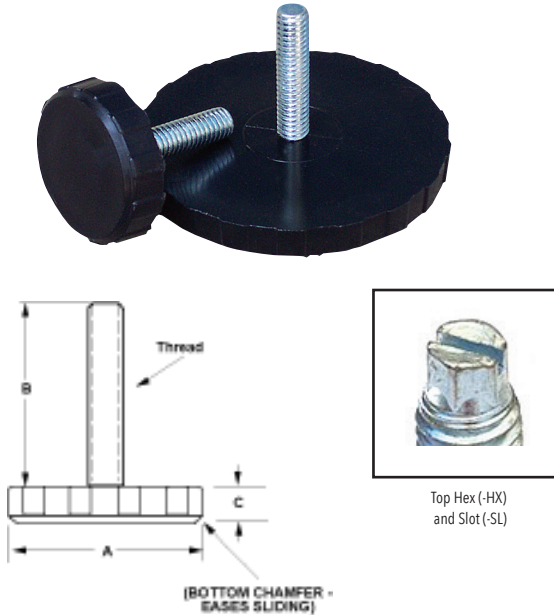

Many colors available as custom option.

KNOB STYLE SOCKET TYPE GLIDES (LEVELERS/KNOBS)

These low-profile polypropylene levelers/knobs are designed for use with socket head allen bolts or threaded rod of various lengths. They are available with three different female thread types: brass insert (-BI), steel hex nut (-HN), or threads molded directly into the polypropylene (-MT). The height of all base sizes is 3/8" thick. The PVC base is a flexible, non-skid and non-marring, rubber-like material.





Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL88-4Bx1/4	IL88-4BSx1/4	100	1/4-20	3	1/4	3/8
IL88-4Bx1/2	IL88-4BSx1/2	100	1/4-20	3	1/2	3/8
IL88-4Bx1/2-HX-SL		100	1/4-20	3	1/2	3/8
IL88-4Bx3/4	IL88-4BSx3/4	100	1/4-20	3	3/4	3/8
IL88-4Bx3/4-HX-SL		100	1/4-20	3	3/4	3/8
IL88-4Bx1	IL88-4BSx1	100	1/4-20	3	1	3/8
IL88-4Bx1-HX-SL		100	1/4-20	3	1	3/8
IL88-4Bx125	IL88-4BSx125	100	1/4-20	3	1-1/4	3/8
IL88-4Bx125-HX-SL		100	1/4-20	3	1-1/4	3/8
IL88-4Bx150	IL88-4BSx150	100	1/4-20	3	1-1/2	3/8
IL88-4Bx175	IL88-4BSx175	100	1/4-20	3	1-3/4	3/8
IL88-4Bx175-HX-SL		100	1/4-20	3	1-3/4	3/8
IL88-4Bx2	IL88-4BSx2	100	1/4-20	3	2	3/8
IL88-4Bx275	IL88-4BSx275	100	1/4-20	3	2-3/4	3/8
IL88-5Bx1/4	IL88-5BSx1/4	500	5/16-18	3	1/4	3/8
IL88-5Bx1/2	IL88-5BSx1/2	500	5/16-18	3	1/2	3/8
IL88-5Bx1/2-HX-SL		500	5/16-18	3	1/2	3/8
IL88-5Bx3/4	IL88-5BSx3/4	500	5/16-18	3	3/4	3/8
IL88-5Bx3/4-HX-SL		500	5/16-18	3	3/4	3/8
IL88-5Bx1	IL88-5BSx1	500	5/16-18	3	1	3/8
IL88-5Bx1-HX-SL		500	5/16-18	3	1	3/8
IL88-5Bx125-HX-SL		500	5/16-18	3	1-1/4	3/8
IL88-5Bx125	IL88-5BSx125	500	5/16-18	3	1-1/4	3/8
IL88-5Bx175	IL88-5BSx175	500	5/16-18	3	1-3/4	3/8
IL88-5Bx175-HX-SL		500	5/16-18	3	1-3/4	3/8
IL88-5Bx225-HX-SL		500	5/16-18	3	2-1/4	3/8
IL88-6Bx1/4	IL88-6BSx1/4	1000	3/8-16	3	1/4	3/8
IL88-6Bx1/2	IL88-6BSx1/2	1000	3/8-16	3	1/2	3/8
IL88-6Bx1/2-HX-SL		1000	3/8-16	3	1/2	3/8
IL88-6Bx3/4-HX-SL		1000	3/8-16	3	3/4	3/8
IL88-6Bx1	IL88-6BSx1	1000	3/8-16	3	1	3/8
IL88-6Bx1-HX-SL		1000	3/8-16	3	1	3/8
IL88-6Bx125	IL88-6BSx125	1000	3/8-16	3	1-1/4	3/8
IL88-6Bx125-HX-SL		1000	3/8-16	3	1-1/4	3/8
IL88-6Bx150	IL88-6BSx150	1000	3/8-16	3	1-1/2	3/8
IL88-6Bx175-HX-SL		1000	3/8-16	3	1-3/4	3/8
IL88-6Bx175	IL88-6BSx175	1000	3/8-16	3	1-3/4	3/8
IL88-6Bx238	IL88-6BSx238	1000	3/8-16	3	2-3/8	3/8
IL88-6Bx238-SL		1000	3/8-16	3	2-3/8	3/8
IL88-6Bx238-HX-SL		1000	3/8-16	3	2-3/8	3/8
IL88-6Bx275-HX-SL		1000	3/8-16	3	2-3/4	3/8
IL88-6Bx338-HX-SL		1000	3/8-16	3	3-3/8	3/8

PN (brass)	PN (hex nut)	PN(molded)	Thread	Base Dia.	Load (lbs.)
IL83-4B-BI	IL83-4B-HN	IL83-4B-MT	1/4-20	1-1/2	100
IL83-5B-BI	IL83-5B-HN	IL83-5B-MT	5/16-18	1-1/2	250
IL83-6B-BI	IL83-6B-HN	IL83-6B-MT	3/8-16	1-1/2	250
IL85-4B-BI	IL85-4B-HN	IL85-4B-MT	1/4-20	2	100
IL85-5B-BI	IL85-5B-HN	IL85-5B-MT	5/16-18	2	250
IL85-6B-BI	IL85-6B-HN	IL85-6B-MT	3/8-16	2	250
IL87-4B-BI	IL87-4B-HN	IL87-4B-MT	1/4-20	2-1/2	100
IL87-5B-BI	IL87-5B-HN	IL87-5B-MT	5/16-18	2-1/2	250
IL87-6B-BI	IL87-6B-HN	IL87-6B-MT	3/8-16	2-1/2	250
IL89-4B-BI	IL89-4B-HN	IL89-4B-MT	1/4-20	3	100
IL89-5B-BI	IL89-5B-HN	IL89-5B-MT	5/16-18	3	250
IL89-6B-BI	IL89-6B-HN	IL89-6B-MT	3/8-16	3	250

PN (PVC)	Thread	Base Dia.	Load (lbs.)
IL83-4B-HN-PVC	1/4-20	1-1/2	75
IL83-5B-HN-PVC	5/16-18	1-1/2	75
IL83-6B-HN-PVC	3/8-16	1-1/2	75


MEDIUM-DUTY LEVELERS
KNOB STYLE - METRIC
KNOB STYLE GLIDES - New Metric Sizes

The IEC Metric Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, instruments, racks and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot are standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number. Up to 1,000 lb. load ratings.

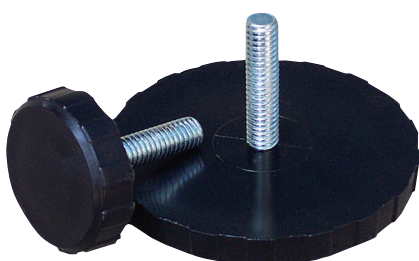

(BOTTOM CHAMFER - EASES SLIDING)


 Top Hex (-HX)
and Slot (-SL)

Steel	SS	Load	Thread	A	B	C
METRIC - Steel and Stainless Steel Knob Style Glides						
IL82-M6Bx6	IL82-M6BSx6	100	M6	38	6	10
IL82-M6Bx12	IL82-M6BSx12	100	M6	38	12	10
IL82-M6Bx25	IL82-M6BSx25	100	M6	38	25	10
IL82-M8Bx6	IL82-M8BSx6	500	M8	38	6	10
IL82-M8Bx12	IL82-M8BSx12	500	M8	38	12	10
IL82-M8Bx25	IL82-M8BSx25	500	M8	38	25	10
IL82-M8Bx45	IL82-M8BSx45	500	M8	38	45	10
IL82-M10Bx15	IL82-M10BSx15	1000	M10	38	15	10
IL82-M10Bx20	IL82-M10BSx20	1000	M10	38	20	10
IL82-M10Bx25	IL82-M10BSx25	1000	M10	38	25	10
IL82-M10Bx40	IL82-M10BSx40	1000	M10	38	40	10
IL84-M6Bx6	IL84-M6BSx6	100	M6	51	6	10
IL84-M6Bx12	IL84-M6BSx12	100	M6	51	12	10
IL84-M6Bx25	IL84-M6BSx25	100	M6	51	25	10
IL84-M8Bx6	IL84-M8BSx6	500	M8	51	6	10
IL84-M8Bx12	IL84-M8BSx12	500	M8	51	12	10
IL84-M8Bx25	IL84-M8BSx25	500	M8	51	25	10
IL84-M8Bx45	IL84-M8BSx45	500	M8	51	45	10
IL84-M10Bx15	IL84-M10BSx15	1000	M10	51	15	10
IL84-M10Bx20	IL84-M10BSx20	1000	M10	51	20	10
IL84-M10Bx25	IL84-M10BSx25	1000	M10	51	25	10
IL84-M10Bx40	IL84-M10BSx40	1000	M10	51	40	10
IL86-M6Bx6	IL86-M6BSx6	100	M6	64	6	10
IL86-M6Bx12	IL86-M6BSx12	100	M6	64	12	10
IL86-M6Bx25	IL86-M6BSx25	100	M6	64	25	10
IL86-M8Bx6	IL86-M8BSx6	500	M8	64	6	10
IL86-M8Bx12	IL86-M8BSx12	500	M8	64	12	10
IL86-M8Bx25	IL86-M8BSx25	500	M8	64	25	10
IL86-M8Bx45	IL86-M8BSx45	500	M8	64	45	10
IL86-M10Bx15	IL86-M10BSx15	1000	M10	64	15	10
IL86-M10Bx20	IL86-M10BSx20	1000	M10	64	20	10
IL86-M10Bx25	IL86-M10BSx25	1000	M10	64	25	10
IL86-M10Bx40	IL86-M10BSx40	1000	M10	64	40	10
IL88-M6Bx6	IL88-M6BSx6	100	M6	76	6	10
IL88-M6Bx12	IL88-M6BSx12	100	M6	76	12	10
IL88-M6Bx25	IL88-M6BSx25	100	M6	76	25	10
IL88-M8Bx6	IL88-M8BSx6	500	M8	76	6	10
IL88-M8Bx12	IL88-M8BSx12	500	M8	76	12	10
IL88-M8Bx25	IL88-M8BSx25	500	M8	76	25	10
IL88-M8Bx45	IL88-M8BSx45	500	M8	76	45	10
IL88-M10Bx15	IL88-M10BSx15	1000	M10	76	15	10
IL88-M10Bx20	IL88-M10BSx20	1000	M10	76	20	10
IL88-M10Bx25	IL88-M10BSx25	1000	M10	76	25	10
IL88-M10Bx40	IL88-M10BSx40	1000	M10	76	40	10

36A - Metric Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.



Many colors available as custom option.

Steel	SS	Load	Thread	A	B	C
36A - METRIC - Steel and Stainless Steel Knob Style Glides (PVC base)						
IL82-M6Bx6-PVC	IL82-M6BSx6-PVC	100	M6	38	6	10
IL82-M6Bx12-PVC	IL82-M6BSx12-PVC	100	M6	38	12	10
IL82-M6Bx25-PVC	IL82-M6BSx25-PVC	100	M6	38	25	10
IL82-M8Bx6-PVC	IL82-M8BSx6-PVC	100	M8	38	6	10
IL82-M8Bx12-PVC	IL82-M8BSx12-PVC	100	M8	38	12	10
IL82-M8Bx25-PVC	IL82-M8BSx25-PVC	100	M8	38	25	10
IL82-M8Bx45-PVC	IL82-M8BSx45-PVC	100	M8	38	45	10
IL82-M10Bx15-PVC	IL82-M10BSx15-PVC	100	M10	38	15	10
IL82-M10Bx20-PVC	IL82-M10BSx20-PVC	100	M10	38	20	10
IL82-M10Bx25-PVC	IL82-M10BSx25-PVC	100	M10	38	25	10
IL82-M10Bx40-PVC	IL82-M10BSx40-PVC	100	M10	38	40	10
IL84-M6Bx6-PVC	IL84-M6BSx6-PVC	100	M6	51	6	10
IL84-M6Bx12-PVC	IL84-M6BSx12-PVC	100	M6	51	12	10
IL84-M6Bx25-PVC	IL84-M6BSx25-PVC	100	M6	51	25	10
IL84-M8Bx6-PVC	IL84-M8BSx6-PVC	100	M8	51	6	10
IL84-M8Bx12-PVC	IL84-M8BSx12-PVC	100	M8	51	12	10
IL84-M8Bx25-PVC	IL84-M8BSx25-PVC	100	M8	51	25	10
IL84-M8Bx45-PVC	IL84-M8BSx45-PVC	100	M8	51	45	10
IL84-M10Bx15-PVC	IL84-M10BSx15-PVC	100	M10	51	15	10
IL84-M10Bx20-PVC	IL84-M10BSx20-PVC	100	M10	51	20	10
IL84-M10Bx25-PVC	IL84-M10BSx25-PVC	100	M10	51	25	10
IL84-M10Bx40-PVC	IL84-M10BSx40-PVC	100	M10	51	40	10



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com


MEDIUM-DUTY LEVELERS

HI-PRO KNOB STYLE GLIDES


HIGH PROFILE KNOB STYLE GLIDES

The IEC High Profile Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These high-profile, polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Useful in both feet and knob applications.

The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number. Available in two base sizes, 1-1/2" and 2".

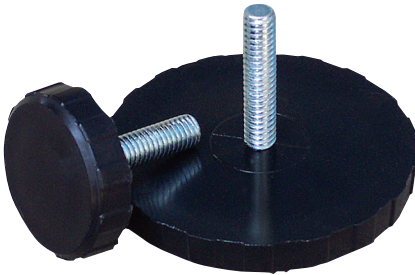

Top Hex (-HX)
and Slot (-SL)




Many colors available as custom option.

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Knob Style Glides						
IL84-HP-6Bx1/4	IL84-HP-6BSx1/4	1000	3/8-16	2	1/4	3/8
IL84-HP-6Bx1/2	IL84-HP-6BSx1/2	1000	3/8-16	2	1/2	3/8
IL84-HP-6Bx1/2-HX-SL		1000	3/8-16	2	1/2	3/8
IL84-HP-6Bx3/4-HX-SL		1000	3/8-16	2	3/4	3/8
IL84-HP-6Bx1	IL84-HP-6BSx1	1000	3/8-16	2	1	3/8
IL84-HP-6Bx1-HX-SL		1000	3/8-16	2	1	3/8
IL84-HP-6Bx125	IL84-HP-6BSx125	1000	3/8-16	2	1-1/4	3/8
IL84-HP-6Bx125-HX-SL		1000	3/8-16	2	1-1/4	3/8
IL84-HP-6Bx150	IL84-HP-6BSx150	1000	3/8-16	2	1-1/2	3/8
IL84-HP-6Bx175-HX-SL		1000	3/8-16	2	1-3/4	3/8
IL84-HP-6Bx175	IL84-HP-6BSx175	1000	3/8-16	2	1-3/4	3/8
IL84-HP-6Bx238	IL84-HP-6BSx238	1000	3/8-16	2	2-3/8	3/8
IL84-HP-6Bx238-SL		1000	3/8-16	2	2-3/8	3/8
IL84-HP-6Bx238-HX-SL		1000	3/8-16	2	2-3/8	3/8
IL84-HP-6Bx275-HX-SL		1000	3/8-16	2	2-3/4	3/8
IL84-HP-6Bx338-HX-SL		1000	3/8-16	2	3-3/8	3/8
IL84-HP-7Bx3/4	IL84-HP-7BSx3/4	1500	1/2-13	2	3/4	3/8
IL84-HP-7Bx1	IL84-HP-7BSx1	1500	1/2-13	2	1	3/8
IL84-HP-7Bx125	IL84-HP-7BSx125	1500	1/2-13	2	1-1/4	3/8
IL84-HP-7Bx150	IL84-HP-7BSx150	1500	1/2-13	2	1-1/2	3/8
IL84-7Bx2	IL84-HP-7BSx2	1500	1/2-13	2	2	3/8
IL84-HP-7Bx238		1500	1/2-13	2	2-3/8	3/8
IL84-HP-7Bx238-HX		1500	1/2-13	2	2-3/8	3/8
IL84-7Bx278	IL84-HP-7BSx278	1500	1/2-13	2	2-7/8	3/8
IL84-7Bx3-HX		1500	1/2-13	2	3	3/8

Threaded Nylon Knob Hubs/Sleeves

These glass-filled black nylon threaded knob hubs can be used for many applications; as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used by themselves to create a "thru-hole" knob or as a locking nut.



* Patent Pending

BLACK NYLON THREADED KNOB HUBS


P/N	THREAD	DIA.	HEIGHT
IL80-HUB-4	1/4-20	1"	3/8
IL80-HUB-5	5/16-18	1"	3/8
IL80-HUB-6	3/8-16	1"	3/8
IL80A-HUB-4	1/4-20	1"	3/4
IL80A-HUB-5	5/16-18	1"	3/4
IL80A-HUB-6	3/8-16	1"	3/4



KNOB STYLE GLIDES – NYLON THREADS

The IEC Knob Style Nylon Thread Glide is ideal for light duty load requirements. These low-profile, solid bottom, large diameter black polypropylene base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Useful in both feet and knob applications.

Nylon threads are especially beneficial for food, medical, marine, electrical, outdoor furniture and many other applications where electrical isolation, magnetism or corrosion is a concern.



Steel	Load	Thread	A	B	C
Nylon Thread Knob Style Glides					
IL82-4BX3/8-NYL	50	1/4-20	1-1/2	3/8	3/8
IL82-4BX1/2-NYL	50	1/4-20	1-1/2	1/2	3/8
IL82-4BX5/8-NYL	50	1/4-20	1-1/2	5/8	3/8
IL82-4BX7/8-NYL	50	1/4-20	1-1/2	7/8	3/8
IL82-4BX1-NYL	50	1/4-20	1-1/2	1	3/8
IL82-4BX1-3/8-NYL	50	1/4-20	1-1/2	1-3/8	3/8
IL82-4BX1-7/8-NYL	50	1/4-20	1-1/2	1-7/8	3/8
IL82-5BX3/8-NYL	75	5/16-18	1-1/2	3/8	3/8
IL82-5BX5/8-NYL	75	5/16-18	1-1/2	5/8	3/8
IL82-5BX7/8-NYL	75	5/16-18	1-1/2	7/8	3/8
IL82-5BX1-NYL	75	5/16-18	1-1/2	1	3/8
IL82-5BX1-3/8-NYL	75	5/16-18	1-1/2	1-3/8*	3/8
IL82-5BX1-7/8-NYL	75	5/16-18	1-1/2	1-7/8*	3/8
IL82-5BX2-3/8-NYL	75	5/16-18	1-1/2	2-3/8*	3/8
IL82-6BX3/8-NYL	100	3/8-16	1-1/2	3/8	3/8
IL82-6BX5/8-NYL	100	3/8-16	1-1/2	5/8	3/8
IL82-6BX7/8-NYL	100	3/8-16	1-1/2	7/8	3/8
IL82-6BX1-NYL	100	3/8-16	1-1/2	1	3/8
IL82-6BX1-3/8-NYL	100	3/8-16	1-1/2	1-3/8	3/8
IL82-6BX1-7/8-NYL	100	3/8-16	1-1/2	1-7/8	3/8
IL82-6BX2-3/8-NYL	100	3/8-16	1-1/2	2-3/8	3/8
IL84-4BX3/8-NYL	50	1/4-20	2	3/8	3/8
IL84-4BX1/2-NYL	50	1/4-20	2	1/2	3/8
IL84-4BX5/8-NYL	50	1/4-20	2	5/8	3/8
IL84-4BX7/8-NYL	50	1/4-20	2	7/8	3/8
IL84-4BX1-NYL	50	1/4-20	2	1	3/8
IL84-4BX1-3/8-NYL	50	1/4-20	2	1-3/8	3/8
IL84-4BX1-7/8-NYL	50	1/4-20	2	1-7/8	3/8
IL84-5BX3/8-NYL	75	5/16-18	2	3/8	3/8
IL84-5BX5/8-NYL	75	5/16-18	2	5/8	3/8
IL84-5BX7/8-NYL	75	5/16-18	2	7/8	3/8
IL84-5BX1-NYL	75	5/16-18	2	1	3/8
IL84-5BX1-3/8-NYL	75	5/16-18	2	1-3/8*	3/8
IL84-5BX1-7/8-NYL	75	5/16-18	2	1-7/8*	3/8
IL84-5BX2-3/8-NYL	75	5/16-18	2	2-3/8*	3/8

* Partially threaded 1" length

KNOB STYLE SOCKET TYPE GLIDES (LEVELERS/KNOBS)

These low-profile polypropylene levelers/knobs are designed for use with socket head allen bolts or threaded rod of various lengths. They are available with three different female thread types: brass insert (-BI), steel hex nut (-HN), or threads molded directly into the polypropylene (-MT). The height of all base sizes is 3/8" thick. The PVC base is a flexible, non-skid and non-marring, rubber-like material.



Steel	Load	Thread	A	B	C
Nylon Thread Knob Style Glides (continued)					
IL84-6BX3/8-NYL	100	3/8-16	2	3/8	3/8
IL84-6BX5/8-NYL	100	3/8-16	2	5/8	3/8
IL84-6BX7/8-NYL	100	3/8-16	2	7/8	3/8
IL84-6BX1-NYL	100	3/8-16	2	1	3/8
IL84-6BX1-3/8-NYL	100	3/8-16	2	1-3/8	3/8
IL84-6BX1-7/8-NYL	100	3/8-16	2	1-7/8	3/8
IL84-6BX2-3/8-NYL	100	3/8-16	2	2-3/8	3/8
IL86-4BX3/8-NYL	50	1/4-20	2-1/2	3/8	3/8
IL86-4BX1/2-NYL	50	1/4-20	2-1/2	1/2	3/8
IL86-4BX5/8-NYL	50	1/4-20	2-1/2	5/8	3/8
IL86-4BX7/8-NYL	50	1/4-20	2-1/2	7/8	3/8
IL86-4BX1-NYL	50	1/4-20	2-1/2	1	3/8
IL86-4BX1-3/8-NYL	50	1/4-20	2-1/2	1-3/8	3/8
IL86-4BX1-7/8-NYL	50	1/4-20	2-1/2	1-7/8	3/8
IL86-5BX3/8-NYL	75	5/16-18	2-1/2	3/8	3/8
IL86-5BX5/8-NYL	75	5/16-18	2-1/2	5/8	3/8
IL86-5BX7/8-NYL	75	5/16-18	2-1/2	7/8	3/8
IL86-5BX1-NYL	75	5/16-18	2-1/2	1	3/8
IL86-5BX1-3/8-NYL	75	5/16-18	2-1/2	1-3/8*	3/8
IL86-5BX1-7/8-NYL	75	5/16-18	2-1/2	1-7/8*	3/8
IL86-5BX2-3/8-NYL	75	5/16-18	2-1/2	2-3/8*	3/8
IL86-6BX3/8-NYL	100	3/8-16	2-1/2	3/8	3/8
IL86-6BX5/8-NYL	100	3/8-16	2-1/2	5/8	3/8
IL86-6BX7/8-NYL	100	3/8-16	2-1/2	7/8	3/8
IL88-6BX1-NYL	100	3/8-16	2-1/2	1	3/8
IL86-6BX1-3/8-NYL	100	3/8-16	2-1/2	1-3/8	3/8
IL86-6BX1-7/8-NYL	100	3/8-16	2-1/2	1-7/8	3/8
IL86-6BX2-3/8-NYL	100	3/8-16	2-1/2	2-3/8	3/8
IL88-4BX3/8-NYL	50	1/4-20	3	3/8	3/8
IL88-4BX1/2-NYL	50	1/4-20	3	1/2	3/8
IL88-4BX5/8-NYL	50	1/4-20	3	5/8	3/8
IL88-4BX7/8-NYL	50	1/4-20	3	7/8	3/8
IL88-4BX1-NYL	50	1/4-20	3	1	3/8
IL88-4BX1-3/8-NYL	50	1/4-20	3	1-3/8	3/8
IL88-4BX1-7/8-NYL	50	1/4-20	3	1-7/8	3/8
IL88-5BX3/8-NYL	75	5/16-18	3	3/8	3/8
IL88-5BX5/8-NYL	75	5/16-18	3	5/8	3/8
IL88-5BX7/8-NYL	75	5/16-18	3	7/8	3/8
IL88-5BX1-NYL	75	5/16-18	3	1	3/8
IL88-5BX1-3/8-NYL	75	5/16-18	3	1-3/8*	3/8
IL88-5BX1-7/8-NYL	75	5/16-18	3	1-7/8*	3/8
IL88-5BX2-3/8-NYL	75	5/16-18	3	2-3/8*	3/8
IL88-6BX3/8-NYL	100	3/8-16	3	3/8	3/8
IL88-6BX5/8-NYL	100	3/8-16	3	5/8	3/8
IL88-6BX7/8-NYL	100	3/8-16	3	7/8	3/8
IL88-6BX1-NYL	100	3/8-16	3	1	3/8
IL88-6BX1-3/8-NYL	100	3/8-16	3	1-3/8	3/8
IL88-6BX1-7/8-NYL	100	3/8-16	3	1-7/8	3/8
IL88-6BX2-3/8-NYL	100	3/8-16	3	2-3/8	3/8

* Partially threaded 1" length

PN (brass)	PN (hex nut)	PN(molded)	Thread	Base Dia.	Load (lbs.)
IL83-4B-BI	IL83-4B-HN	IL83-4B-MT	1/4-20	1-1/2	100
IL83-5B-BI	IL83-5B-HN	IL83-5B-MT	5/16-18	1-1/2	250
IL83-6B-BI	IL83-6B-HN	IL83-6B-MT	3/8-16	1-1/2	250
IL85-4B-BI	IL85-4B-HN	IL85-4B-MT	1/4-20	2	100
IL85-5B-BI	IL85-5B-HN	IL85-5B-MT	5/16-18	2	250
IL85-6B-BI	IL85-6B-HN	IL85-6B-MT	3/8-16	2	250
IL87-4B-BI	IL87-4B-HN	IL87-4B-MT	1/4-20	2-1/2	100
IL87-5B-BI	IL87-5B-HN	IL87-5B-MT	5/16-18	2-1/2	250
IL87-6B-BI	IL87-6B-HN	IL87-6B-MT	3/8-16	2-1/2	250
IL89-4B-BI	IL89-4B-HN	IL89-4B-MT	1/4-20	3	100
IL89-5B-BI	IL89-5B-HN	IL89-5B-MT	5/16-18	3	250
IL89-6B-BI	IL89-6B-HN	IL89-6B-MT	3/8-16	3	250

PN (PVC)	Thread	Base Dia.	Load (lbs.)
IL83-4B-HN-PVC	1/4-20	1-1/2	75
IL83-5B-HN-PVC	5/16-18	1-1/2	75
IL83-6B-HN-PVC	3/8-16	1-1/2	75