



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

www.levelingmounts.com & www.iec-corp.com

MEDIUM-DUTY LEVELERS

ANY THREAD . . . ANY LENGTH . . . ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

Welcome ...

We are pleased to introduce our newly expanded line of medium-duty levelers offering hundreds of new products with thousands of features to provide just the right leveling solution for your application.

We've included an overview of the complete line, a new selection chart and product specification tables with dimensions and load ratings for easily finding an off-the-shelf standard product. You'll find a quote request form available for modifying a leveler or a custom leveler design when a standard product won't quite meet your leveling needs.

IEC's mission since 1992 has been to lead the leveler industry in meeting the needs of OEM machinery and equipment manufacturers with medium duty leveler products that match our customers' high standards and cost requirements. We have specialized in developing medium duty levelers with the most commonly requested features, materials and configurations offering high-strength bases and adjustable 2" to 8" stud lengths. Our engineering department is always available to assist you with selecting the right standard product for your application or designing a leveler to your exact specifications.

We recognize the need in OEM manufacturing for high performance products, attractive designs and competitive pricing. We've made every effort to address these needs in this catalog. We now offer more choices for top and bottom leveler adjustment, stud and base materials and stud lengths to better suit your application needs.

Paying attention to our customers and their needs for over 20 years has enabled IEC to become the leader in leveling solution design and development. This has resulted in thousands of new products, stronger customer service and assurance that the products you specify today will be available for the duration of your product life-cycle.

IEC provides the industry's most complete line of standard and custom leveling devices in "any thread...any length...any base." We appreciate your interest and hope to hear from you whenever you need a leveling solution that will put you on the "right foot."



CONTENTS

WELCOME

CONTENTS	3
----------------	---

PRODUCT OVERVIEW	4-5
------------------------	-----

NYLON SWIVEL LEVELERS

Nylon Swivel, Socket with Rubber Pad.....	6
---	---

Nylon Swivel, Metric Socket with Rubber Pad	7
---	---

Nylon Swivel, Stud with Rubber Pad - 2",3",4",5",6",8" Stud Length	8-19
--	------

Nylon Swivel, Metric Stud with Rubber Pad - 2",3",4",5",6",8" Stud Lengths	20-31
--	-------

SAUCER BASE™ SWIVEL LEVELERS

Saucer Base™ Fixed Stud Levelers - 1" to 8" Studs.....	32-35
--	-------

Saucer Base™ Metric Fixed Stud Levelers - 1" to 8" Studs.....	36-39
---	-------

Saucer Base™ Swivel Stud Levelers - 1" to 8" Studs.....	40-51
---	-------

Saucer Base™ Swivel Stud Levelers - 1" to 8" Studs.....	52-62
---	-------

Saucer Base™ Fixed Socket Levelers.....	64
---	----

Saucer Base™ Metric Fixed Socket Levelers.....	65
--	----

Saucer Base™ Swivel Socket Levelers	66
---	----

Saucer Base™ Swivel Socket Metric Levelers	67
--	----

THREADED TUBE ENDS

Threaded Tube Ends	68
--------------------------	----

LOW PROFILE POLY SWIVEL

Low Profile Poly Swivel Socket Levelers	70
---	----

Low Profile Metric Poly Swivel Socket Levelers.....	71
---	----

Low Profile Poly Swivel Stud Levelers - 2",3",4",5",6",8" Stud Length.....	72-77
--	-------

Low Profile Metric Poly Swivel Stud Levelers - 2",3",4",5",6",8" Stud Lengths.....	78-83
--	-------

POLY BASED FIXED GLIDES

Poly Based Fixed Stud Glides	84-89
------------------------------------	-------

Poly Based Fixed Metric Stud Glides	90-91
---	-------

Poly Based Fixed Socket Glides.....	92
-------------------------------------	----

Poly Based Metric Fixed Socket Glides.....	93
--	----

HI-PRO® POLY BASED FIXED GLIDES

Hi-Profile Knob Style Stud Glides.....	94-95
--	-------

Hi-Profile & Double High Profile Poly Fixed Stud Glides	96-99
---	-------

Hi-Profile & Double High Profile Poly (English & Metric) Fixed Socket Glides.....	100-103
---	---------

KNOB STYLE GLIDES

Knob Style Glides Stud Type	104-110
-----------------------------------	---------

Threaded Nylon Knob Hubs / Sleeves	105
--	-----

Knob Style Metric Glides Stud Type.....	105
---	-----

Hi-Pro Knob Style Glides Stud Type	104-110
--	---------

Knob Style Glides Nylon Threads (New)	110
---	-----

Knob Style Glides Socket Type.....	110
------------------------------------	-----

RFQ FAX-BACK FORM

Request A Quote Form	112
----------------------------	-----

WARRANTY

Warranty and Disclaimer.....	113
------------------------------	-----



MEDIUM DUTY LEVELERS


NYLON SWIVEL – SOCKET LEVELERS (with rubber pad)

The IEC Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases from 1-1/2" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.



NYLON SWIVEL – STUD LEVELERS (with rubber pad)

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel stud has trivalent zinc, yellow chromate finish.

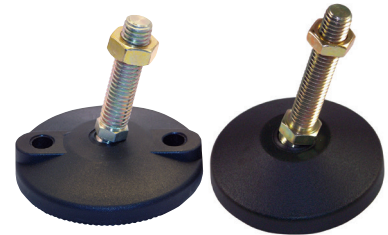

LOW PROFILE SAUCER™ BASE FIXED & SWIVEL LEVELERS (NEW 2019)

The IEC *Saucer Base™ Medium Duty Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available in Fixed and Swivel Stud designs with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

For more thread sizes and lengths for this base style see our Ruggedized Light Duty Glide catalog.



LOW-PROFILE, SAUCER BASE™ FIXED SOCKET LEVELERS (NEW 2019)

The IEC *Saucer Base™ Fixed Socket Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick **with a bottom hex drive molded into the base. Steel socket and washer have clear zinc plating.** Color base options shown also available.



LOW-PROFILE, SAUCER BASE™ SWIVEL SOCKET LEVELERS (NEW 2019)

The IEC *Saucer Base™ Swivel Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. **Steel socket has gold zinc plating. Color base options shown also available.**





MEDIUM DUTY LEVELERS

LOW-PROFILE POLY SWIVEL – SOCKET LEVELERS

The IEC Low-Profile Steel and Stainless Steel Socket Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4", 15 degree swivel from centerline. Steel Socket has trivalent zinc, yellow chromate finish.




LOW-PROFILE POLY SWIVEL – STUD LEVELERS

The IEC Low-Profile Steel and Stainless Steel Stud Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4", 15 degree swivel from centerline. Steel Socket has trivalent zinc, yellow chromate finish.



POLY BASE FIXED STUD & SOCKET GLIDES

The IEC Poly Base Steel and Stainless Steel Fixed Stud & Socket Glides are ideal for medium-duty load requirements. The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Trivalent zinc plated steel stud and black polypropylene base. Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).

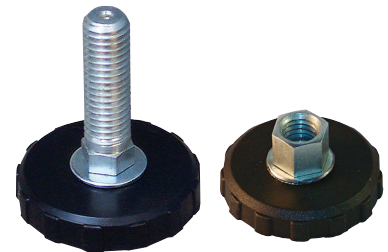

HI-PRO® & DOUBLE HIGH PROFILE POLY BASE FIXED STUD GLIDES (NEW 2019 & 2020)

The IEC *High Profile & Double High Profile Steel and Stainless Steel Poly Base Fixed Stud Glide* features IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.**



HI-PRO® & DOUBLE HIGH PROFILE POLY BASE FIXED SOCKET GLIDES (NEW 2019 & 2020)

The IEC *High Profile & Double High Profile Steel and Stainless Steel Poly Base Fixed Socket Glide* features IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. Hi-Profile Poly Base Fixed Socket Thru-Hole Threaded and Non-Threaded designs are also available.



KNOB STYLE – LEVELING GLIDES

The IEC Knob Style Steel and Stainless Steel Socket and Stud Style Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene or PVC base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Trivalent, zinc-plated steel stud.





NYLON SWIVEL SOCKET LEVELERS – with Rubber Pad



The IEC Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

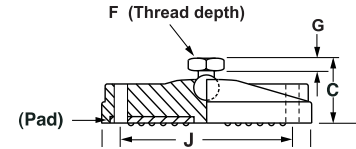

1" to 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	F	G	H	J
Nylon Swivel Socket Levelers--with Rubber Pad										
IL91-4G-P	IL91-4S-P	100	1/4-20	1/2	1	1	3/8	3/16	-	-
IL91-5G-P	IL91-5S-P	500	5/16-18	1/2	1	1	3/8	3/16	-	-
IL91-6G-P	IL91-6S-P	2000	3/8-16	1/2	1	1	3/8	3/16	-	-
IL91-7G-P	IL91-7S-P	2000	1/2-13	5/8	1-5/16	1	3/8	1/2	-	-
IL91-8G-P	IL91-8S-P	2000	5/8-11	3/4	1-7/16	1	1/2	5/8	-	-
IL91-9G-P	IL91-9S-P	2000	3/4-10	1	1-5/8	1	5/8	11/16	-	-
IL91-10G-P	IL91-10S-P	2000	1-8	1 1/4	1-7/8	1	11/16	3/4	-	-
IL93-4G-P	IL93-4S-P	100	1/4-20	1/2	1	1 1/2	3/8	3/16	-	-
IL93-5G-P	IL93-5S-P	500	5/16-18	1/2	1	1 1/2	3/8	3/16	-	-
IL93-6G-P	IL93-6S-P	2000	3/8-16	1/2	1	1 1/2	3/8	3/16	-	-
IL93-7G-P	IL93-7S-P	2000	1/2-13	5/8	1-5/16	1 1/2	3/8	1/2	-	-
IL93-8G-P	IL93-8S-P	2000	5/8-11	3/4	1-7/16	1 1/2	1/2	5/8	-	-
IL93-9G-P	IL93-9S-P	2000	3/4-10	1	1-5/8	1 1/2	5/8	11/16	-	-
IL93-10G-P	IL93-10S-P	2000	1-8	1 1/4	1-7/8	1 1/2	11/16	3/4	-	-
IL95-4G-P	IL95-4S-P	100	1/4-20	1/2	1	2 3/8	3/8	3/16	-	-
IL95-5G-P	IL95-5S-P	500	5/16-18	1/2	1	2 3/8	3/8	3/16	-	-
IL95-6G-P	IL95-6S-P	2500	3/8-16	1/2	1	2 3/8	3/8	3/16	-	-
IL95-7G-P	IL95-7S-P	2500	1/2-13	5/8	1-5/16	2 3/8	3/8	1/2	-	-
IL95-8G-P	IL95-8S-P	2500	5/8-11	3/4	1-7/16	2 3/8	1/2	5/8	-	-
IL95-9G-P	IL95-9S-P	2500	3/4-10	1	1-5/8	2 3/8	5/8	11/16	-	-
IL95-10G-P	IL95-10S-P	2500	1-8	1 1/4	1-7/8	2 3/8	11/16	3/4	-	-
IL97-4G-H-P	IL97-4S-H-P	100	1/4-20	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-5G-H-P	IL97-5S-H-P	500	5/16-18	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-6G-H-P	IL97-6S-H-P	3000	3/8-16	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-7G-H-P	IL97-7S-H-P	3000	1/2-13	5/8	1-5/16	3 1/8	3/8	1/2	.39	2.2
IL97-8G-H-P	IL97-8S-H-P	3000	5/8-11	3/4	1-7/16	3 1/8	1/2	5/8	.39	2.2
IL97-9G-H-P	IL97-9S-H-P	3000	3/4-10	1	1-5/8	3 1/8	5/8	11/16	.39	2.2
IL97-10G-H-P	IL97-10S-H-P	3000	1-8	1 1/4	1-7/8	3 1/8	11/16	3/4	.39	2.2
IL99-4G-H-P	IL99-4S-H-P	100	1/4-20	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-5G-H-P	IL99-5S-H-P	500	5/16-18	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-6G-H-P	IL99-6S-H-P	3000	3/8-16	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-7G-H-P	IL99-7S-H-P	3000	1/2-13	5/8	1-1/2	4	3/8	1/2	.51	2.9
IL99-8G-H-P	IL99-8S-H-P	3000	5/8-11	3/4	1-5/8	4	1/2	5/8	.51	2.9
IL99-9G-H-P	IL99-9S-H-P	3000	3/4-10	1	1-7/8	4	5/8	11/16	.51	2.9
IL99-10G-H-P	IL99-10S-H-P	3000	1-8	1 1/4	2-1/8	4	11/16	3/4	.51	2.9
IL99A-4G-H-P	IL99A-4S-H-P	100	1/4-20	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-5G-H-P	IL99A-5S-H-P	500	5/16-18	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-6G-H-P	IL99A-6S-H-P	3000	3/8-16	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-7G-H-P	IL99A-7S-H-P	3000	1/2-13	5/8	1-1/2	6	3/8	1/2	.51	4.9
IL99A-8G-H-P	IL99A-8S-H-P	3000	5/8-11	3/4	1-5/8	6	1/2	5/8	.51	4.9
IL99A-9G-H-P	IL99A-9S-H-P	3000	3/4-10	1	1-7/8	6	5/8	11/16	.51	4.9
IL99A-10G-H-P	IL99A-10S-H-P	3000	1-8	1 1/4	2-1/8	6	11/16	3/4	.51	4.9
IL99B-4G-H-P	IL99B-4S-H-P	100	1/4-20	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-5G-H-P	IL99B-5S-H-P	500	5/16-18	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-6G-H-P	IL99B-6S-H-P	3000	3/8-16	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-7G-H-P	IL99B-7S-H-P	3000	1/2-13	5/8	1-1/2	8	3/8	1/2	.51	6.9
IL99B-8G-H-P	IL99B-8S-H-P	3000	5/8-11	3/4	1-5/8	8	1/2	5/8	.51	6.9
IL99B-9G-H-P	IL99B-9S-H-P	3000	3/4-10	1	1-7/8	8	5/8	11/16	.51	6.9
IL99B-10G-H-P	IL99B-10S-H-P	3000	1-8	1 1/4	2-1/8	8	11/16	3/4	.51	6.9
IL98C-4G-H-P	IL98C-4S-H-P	100	1/4-20	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL98C-5G-H-P	IL98C-5S-H-P	500	5/16-18	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL98C-6G-H-P	IL98C-6S-H-P	3000	3/8-16	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL98C-7G-H-P	IL98C-7S-H-P	3000	1/2-13	5/8	1-1/2	10	3/8	1/2	.51	8.9
IL98C-8G-H-P	IL98C-8S-H-P	3000	5/8-11	3/4	1-5/8	10	1/2	5/8	.51	8.9
IL98C-9G-H-P	IL98C-9S-H-P	3000	3/4-10	1	1-7/8	10	5/8	11/16	.51	8.9
IL98C-10G-H-P	IL98C-10S-H-P	3000	1-8	1 1/4	2-1/8	10	11/16	3/4	.51	8.9

"-H" denotes two lag holes in base Note: "F" column values represent thread depth

To order without rubber pad, remove "-P." To order without lag holes, remove "-H."



NYLON SWIVEL METRIC SOCKET STYLE

LEVELERS – with Rubber Pad


The IEC Metric Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

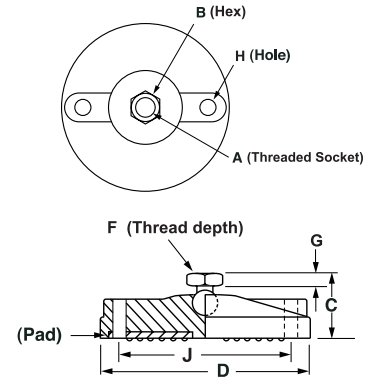

Metric Threads : 1" to 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	F	G	H	J
Nylon Swivel Socket Levelers-with Rubber Pad										
IL91-M6G-P	IL91-M6S-P	100	M6X1	1/2	1	1	3/8	3/16	-	-
IL91-M8G-P	IL91-M8S-P	500	M8X1.25	1/2	1	1	3/8	3/16	-	-
IL91-M10G-P	IL91-M10S-P	2000	M10X1.50	1/2	1	1	3/8	3/16	-	-
IL91-M12G-P	IL91-M12S-P	2000	M12X1.75	5/8	1-5/16	1	3/8	1/2	-	-
IL91-M16G-P	IL91-M16S-P	2000	M16X2.00	3/4	1-7/16	1	1/2	5/8	-	-
IL91-M20G-P	IL91-M20S-P	2000	M20X2.50	1	1-5/8	1	5/8	11/16	-	-
IL91-M24G-P	IL91-M24S-P	2000	M24X3.00	1 1/4	1-7/8	1	11/16	3/4	-	-
IL93-M6G-P	IL93-M6S-P	100	M6X1	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M8G-P	IL93-M8S-P	500	M8X1.25	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M10G-P	IL93-M10S-P	2000	M10X1.50	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M12G-P	IL93-M12S-P	2000	M12X1.75	5/8	1-5/16	1 1/2	3/8	1/2	-	-
IL93-M16G-P	IL93-M16S-P	2000	M16X2.00	3/4	1-7/16	1 1/2	1/2	5/8	-	-
IL93-M20G-P	IL93-M20S-P	2000	M20X2.50	1	1-5/8	1 1/2	5/8	11/16	-	-
IL93-M24G-P	IL93-M24S-P	2000	M24X3.00	1 1/4	1-7/8	1 1/2	11/16	3/4	-	-
IL95-M6G-P	IL95-M6S-P	100	M6X1	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M8G-P	IL95-M8S-P	500	M8X1.25	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M10G-P	IL95-M10S-P	2500	M10X1.50	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M12G-P	IL95-M12S-P	2500	M12X1.75	5/8	1-5/16	2 3/8	3/8	1/2	-	-
IL95-M16G-P	IL95-M16S-P	2500	M16X2.00	3/4	1-7/16	2 3/8	1/2	5/8	-	-
IL95-M20G-P	IL95-M20S-P	2500	M20X2.50	1	1-5/8	2 3/8	5/8	11/16	-	-
IL95-M24G-P	IL95-M24S-P	2500	M24X3.00	1 1/4	1-7/8	2 3/8	11/16	3/4	-	-
IL97-M6G-H-P	IL97-M6S-H-P	100	M6X1	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M8G-H-P	IL97-M8S-H-P	500	M8X1.25	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M10G-H-P	IL97-M10S-H-P	3000	M10X1.50	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M12G-H-P	IL97-M12S-H-P	3000	M12X1.75	5/8	1-5/16	3 1/8	3/8	1/2	.39	2.2
IL97-M16G-H-P	IL97-M16S-H-P	3000	M16X2.00	3/4	1-7/16	3 1/8	1/2	5/8	.39	2.2
IL97-M20G-H-P	IL97-M20S-H-P	3000	M20X2.50	1	1-5/8	3 1/8	5/8	11/16	.39	2.2
IL97-M24G-H-P	IL97-M24S-H-P	3000	M24X3.00	1 1/4	1-7/8	3 1/8	11/16	3/4	.39	2.2
IL99-M6G-H-P	IL99-M6S-H-P	100	M6X1	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M8G-H-P	IL99-M8S-H-P	500	M8X1.25	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M10G-H-P	IL99-M10S-H-P	3000	M10X1.50	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M12G-H-P	IL99-M12S-H-P	3000	M12X1.75	5/8	1-1/2	4	3/8	1/2	.51	2.9
IL99-M16G-H-P	IL99-M16S-H-P	3000	M16X2.00	3/4	1-5/8	4	1/2	5/8	.51	2.9
IL99-M20G-H-P	IL99-M20S-H-P	3000	M20X2.50	1	1-7/8	4	5/8	11/16	.51	2.9
IL99-M24G-H-P	IL99-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	4	11/16	3/4	.51	2.9
IL99A-M6G-H-P	IL99A-M6S-H-P	100	M6X1	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M8G-H-P	IL99A-M8S-H-P	500	M8X1.25	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M10G-H-P	IL99A-M10S-H-P	3000	M10X1.50	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M12G-H-P	IL99A-M12S-H-P	3000	M12X1.75	5/8	1-1/2	6	3/8	1/2	.51	4.9
IL99A-M16G-H-P	IL99A-M16S-H-P	3000	M16X2.00	3/4	1-5/8	6	1/2	5/8	.51	4.9
IL99A-M20G-H-P	IL99A-M20S-H-P	3000	M20X2.50	1	1-7/8	6	5/8	11/16	.51	4.9
IL99A-M24G-H-P	IL99A-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	6	11/16	3/4	.51	4.9
IL99B-M6G-H-P	IL99B-M6S-H-P	100	M6X1	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M8G-H-P	IL99B-M8S-H-P	500	M8X1.25	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M10G-H-P	IL99B-M10S-H-P	3000	M10X1.50	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M12G-H-P	IL99B-M12S-H-P	3000	M12X1.75	5/8	1-1/2	8	3/8	1/2	.51	6.9
IL99B-M16G-H-P	IL99B-M16S-H-P	3000	M16X2.00	3/4	1-5/8	8	1/2	5/8	.51	6.9
IL99B-M20G-H-P	IL99B-M20S-H-P	3000	M20X2.50	1	1-7/8	8	5/8	11/16	.51	6.9
IL99B-M24G-H-P	IL99B-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	8	11/16	3/4	.51	6.9
IL99C-M6G-H-P	IL99C-M6S-H-P	100	M6X1	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M8G-H-P	IL99C-M8S-H-P	500	M8X1.25	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M10G-H-P	IL99C-M10S-H-P	3000	M10X1.50	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M12G-H-P	IL99C-M12S-H-P	3000	M12X1.75	5/8	1-1/2	10	3/8	1/2	.51	8.9
IL99C-M16G-H-P	IL99C-M16S-H-P	3000	M16X2.00	3/4	1-5/8	10	1/2	5/8	.51	8.9
IL99C-M20G-H-P	IL99C-M20S-H-P	3000	M20X2.50	1	1-7/8	10	5/8	11/16	.51	8.9
IL99C-M24G-H-P	IL99C-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	10	11/16	3/4	.51	8.9

"H" denotes two lag holes in base Note: "F" column values represent thread depth

To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 1&2 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad





The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

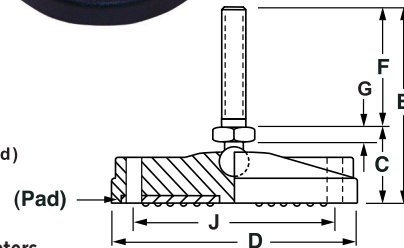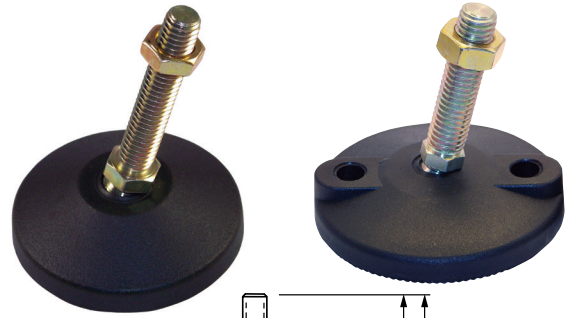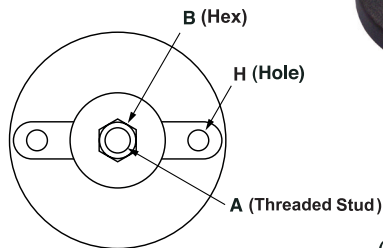**1" to 3-1/8" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—2" Stud and Rubber Pad											
IL90-4Gx1-P	IL90-4Sx1-P	100	1/4-20	1/2	1	1	2	1	3/16	-	-
IL90-4Gx15-P	IL90-4Sx15-P	100	1/4-20	1/2	1	1	2-1/2	1-1/2	3/16	-	-
IL90-4G-P	IL90-4S-P	100	1/4-20	1/2	1	1	3	2	3/16	-	-
IL90-5Gx1-P	IL90-5Sx1-P	500	5/16-18	1/2	1	1	2	1	3/16	-	-
IL90-5G-P	IL90-5S-P	500	5/16-18	1/2	1	1	3	2	3/16	-	-
IL90-6G-P	IL90-6S-P	2000	3/8-16	1/2	1	1	3	2	3/16	-	-
IL90-7G-P	IL90-7S-P	2000	1/2-13	1/2	1	1	3	2	3/16	-	-
IL90-8G-P	IL90-8S-P	2000	5/8-11	5/8	1	1	3	2	3/16	-	-
IL90-9G-P	IL90-9S-P	2000	3/4-10	3/4	1	1	3	2	3/16	-	-
IL90-10G-P	IL90-10S-P	2000	1-8	1	1-1/4	1	3-1/4	2	7/16	-	-
IL90-12G-P	IL90-12S-P	2000	1 1/4-7	1-1/4	1-1/4	1	3-1/4	2	7/16	-	-
IL92-4Gx1-P	IL92-4Sx1-P	100	1/4-20	1/2	1	1-1/2	2	1	3/16	-	-
IL92-4Gx15-P	IL92-4Sx15-P	100	1/4-20	1/2	1	1-1/2	2-1/2	1-1/2	3/16	-	-
IL92-4G-P	IL92-4S-P	100	1/4-20	1/2	1	1-1/2	3	2	3/16	-	-
IL92-5Gx1-P	IL92-5Sx1-P	500	5/16-18	1/2	1	1-1/2	2	1	3/16	-	-
IL92-5G-P	IL92-5S-P	500	5/16-18	1/2	1	1-1/2	3	2	3/16	-	-
IL92-6G-P	IL92-6S-P	2000	3/8-16	1/2	1	1-1/2	3	2	3/16	-	-
IL92-7G-P	IL92-7S-P	2000	1/2-13	1/2	1	1-1/2	3	2	3/16	-	-
IL92-8G-P	IL92-8S-P	2000	5/8-11	5/8	1	1-1/2	3	2	3/16	-	-
IL92-9G-P	IL92-9S-P	2000	3/4-10	3/4	1	1-1/2	3	2	3/16	-	-
IL92-10G-P	IL92-10S-P	2000	1-8	1	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL92-12G-P	IL92-12S-P	2000	1 1/4-7	1-1/4	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL94-4Gx1-P	IL94-4Sx1-P	100	1/4-20	1/2	1	2-3/8	2	1	3/16	-	-
IL94-4Gx15-P	IL94-4Sx15-P	100	1/4-20	1/2	1	2-3/8	2-1/2	1-1/2	3/16	-	-
IL94-4G-P	IL94-4S-P	100	1/4-20	1/2	1	2-3/8	3	2	3/16	-	-
IL94-5Gx1-P	IL94-5Sx1-P	500	5/16-18	1/2	1	2-3/8	2	1	3/16	-	-
IL94-5G-P	IL94-5S-P	500	5/16-18	1/2	1	2-3/8	3	2	3/16	-	-
IL94-6G-P	IL94-6S-P	2500	3/8-16	1/2	1	2-3/8	3	2	3/16	-	-
IL94-7G-P	IL94-7S-P	2500	1/2-13	1/2	1	2-3/8	3	2	3/16	-	-
IL94-8G-P	IL94-8S-P	2500	5/8-11	5/8	1	2-3/8	3	2	3/16	-	-
IL94-9G-P	IL94-9S-P	2500	3/4-10	3/4	1	2-3/8	3	2	3/16	-	-
IL94-10G-P	IL94-10S-P	2500	1-8	1	1-1/4	2-3/8	3 1/4	2	7/16	-	-
IL94-12G-P	IL94-12S-P	2500	1 1/4-7	1-1/4	1-1/4	2-3/8	3 1/4	2	7/16	-	-
IL96-4Gx1-H-P	IL96-4Sx1-H-P	100	1/4-20	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-4Gx15-P	IL96-4Sx15-P	100	1/4-20	1/2	1	3-1/8	2-1/2	1-1/2	3/16	.39	2.2
IL96-4G-H-P	IL96-4S-H-P	100	1/4-20	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-5Gx1-P	IL96-5Sx1-P	500	5/16-18	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-5G-H-P	IL96-5S-H-P	500	5/16-18	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-6G-H-P	IL96-6S-H-P	3000	3/8-16	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-7G-H-P	IL96-7S-H-P	3000	1/2-13	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-8G-H-P	IL96-8S-H-P	3000	5/8-11	5/8	1	3-1/8	3	2	3/16	.39	2.2
IL96-9G-H-P	IL96-9S-H-P	3000	3/4-10	3/4	1	3-1/8	3	2	3/16	.39	2.2
IL96-10G-H-P	IL96-10S-H-P	3000	1-8	1	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2
IL96-12G-H-P	IL96-12S-H-P	3000	1 1/4-7	1-1/4	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 1&2 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**




The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

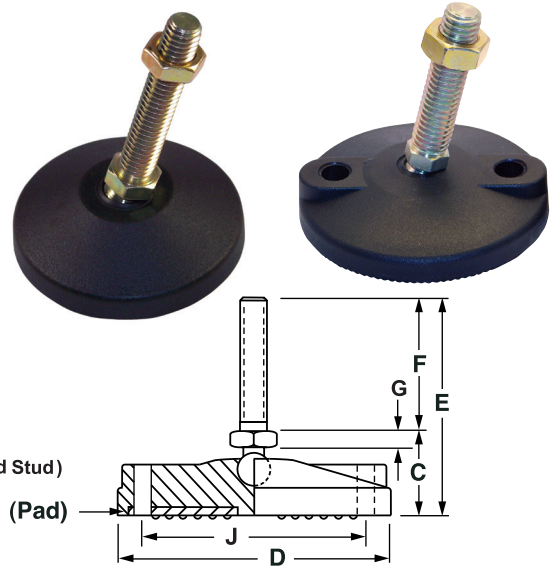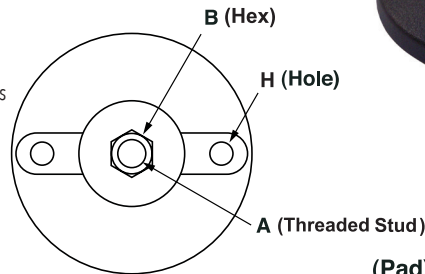**4", 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-2" Stud and Rubber Pad											
IL98-4Gx1-H-P	IL98-4Sx1-H-P	100	1/4-20	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-4Gx15-P	IL98-4Sx15-P	100	1/4-20	1/2	1-1/4	4	2-3/4	1-1/2	3/16	.51	2.9
IL98-4G-H-P	IL98-4S-H-P	100	1/4-20	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-5Gx1-P	IL98-5Sx1-P	500	5/16-18	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-5G-H-P	IL98-5S-H-P	500	5/16-18	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-6G-H-P	IL98-6S-H-P	3000	3/8-16	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-7G-H-P	IL98-7S-H-P	3000	1/2-13	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-8G-H-P	IL98-8S-H-P	3000	5/8-11	5/8	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-9G-H-P	IL98-9S-H-P	3000	3/4-10	3/4	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-10G-H-P	IL98-10S-H-P	3000	1-8	1	1-1/2	4	3-1/2	2	7/16	.51	2.9
IL98-12G-H-P	IL98-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	4	3-1/2	2	7/16	.51	2.9
IL98A-4Gx1-H-P	IL98A-4Sx1-H-P	100	1/4-20	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-4Gx15-P	IL98A-4Sx15-P	100	1/4-20	1/2	1-1/4	6	2-3/4	1-1/2	3/16	.51	4.9
IL98A-4G-H-P	IL98A-4S-H-P	100	1/4-20	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-5Gx1-P	IL98A-5Sx1-P	500	5/16-18	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-5G-H-P	IL98A-5S-H-P	500	5/16-18	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-6G-H-P	IL98A-6S-H-P	3000	3/8-16	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-7G-H-P	IL98A-7S-H-P	3000	1/2-13	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-8G-H-P	IL98A-8S-H-P	3000	5/8-11	5/8	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-9G-H-P	IL98A-9S-H-P	3000	3/4-10	3/4	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-10G-H-P	IL98A-10S-H-P	3000	1-8	1	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98A-12G-H-P	IL98A-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98B-4Gx1-H-P	IL98B-4Sx1-H-P	100	1/4-20	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-4Gx15-P	IL98B-4Sx15-P	100	1/4-20	1/2	1-1/4	8	2-3/4	1-1/2	3/16	.51	6.9
IL98B-4G-H-P	IL98B-4S-H-P	100	1/4-20	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-5Gx1-P	IL98B-5Sx1-P	500	5/16-18	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-5G-H-P	IL98B-5S-H-P	500	5/16-18	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-6G-H-P	IL98B-6S-H-P	3000	3/8-16	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-7G-H-P	IL98B-7S-H-P	3000	1/2-13	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-8G-H-P	IL98B-8S-H-P	3000	5/8-11	5/8	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-9G-H-P	IL98B-9S-H-P	3000	3/4-10	3/4	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-10G-H-P	IL98B-10S-H-P	3000	1-8	1	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98B-12G-H-P	IL98B-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98C-4Gx1-H-P	IL98C-4Sx1-H-P	100	1/4-20	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-4Gx15-P	IL98C-4Sx15-P	100	1/4-20	1/2	1-1/4	10	3-1/4	1-1/2	3/16	.51	8.9
IL98C-4G-H-P	IL98C-4S-H-P	100	1/4-20	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-5Gx1-P	IL98C-5Sx1-P	500	5/16-18	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-5G-H-P	IL98C-5S-H-P	500	5/16-18	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-6G-H-P	IL98C-6S-H-P	3000	3/8-16	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-7G-H-P	IL98C-7S-H-P	3000	1/2-13	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-8G-H-P	IL98C-8S-H-P	3000	5/8-11	5/8	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98B-9G-H-P	IL98C-9S-H-P	3000	3/4-10	3/4	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-10G-H-P	IL98C-10S-H-P	3000	1-8	1	1-1/2	10	3-1/2	2	7/16	.51	8.9
IL98C-12G-H-P	IL98C-12S-H-P	3000	1 1/4-7	1-1/4	1-1/2	10	3-1/2	2	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 3-INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad





The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

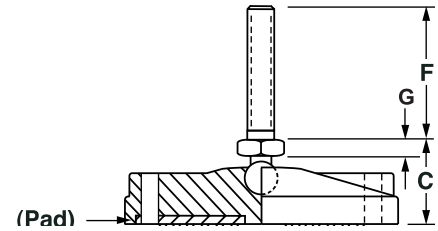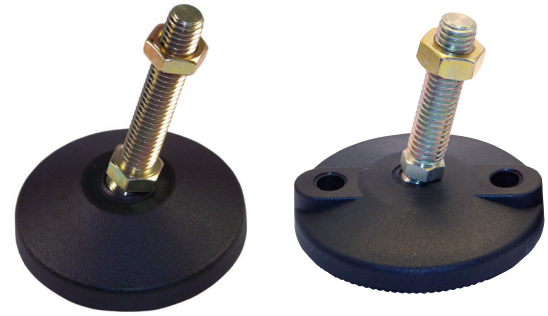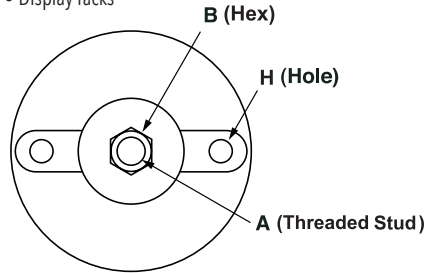

1" to 3-1/8" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL90-4GX3-P	IL90-4SX3-P	100	1/4-20	1/2	1	1	4	3	3/16	-	-
IL90-5GX3-P	IL90-5SX3-P	500	5/16-18	1/2	1	1	4	3	3/16	-	-
IL90-6GX3-P	IL90-6SX3-P	2000	3/8-16	1/2	1	1	4	3	3/16	-	-
IL90-7GX3-P	IL90-7SX3-P	2000	1/2-13	1/2	1	1	4	3	3/16	-	-
IL90-8GX3-P	IL90-8SX3-P	2000	5/8-11	5/8	1	1	4	3	3/16	-	-
IL90-9GX3-P	IL90-9SX3-P	2000	3/4-10	3/4	1	1	4	3	3/16	-	-
IL90-10GX3-P	IL90-10SX3-P	2000	1-8	1	1 1/4	1	4 1/4	3	7/16	-	-
IL90-12GX3-P	IL90-12SX3-P	2000	1 1/4-7	1 1/4	1 1/4	1	4 1/4	3	7/16	-	-
IL92-4GX3-P	IL92-4SX3-P	100	1/4-20	1/2	1	1 1/2	4	3	3/16	-	-
IL92-5GX3-P	IL92-5SX3-P	500	5/16-18	1/2	1	1 1/2	4	3	3/16	-	-
IL92-6GX3-P	IL92-6SX3-P	2000	3/8-16	1/2	1	1 1/2	4	3	3/16	-	-
IL92-7GX3-P	IL92-7SX3-P	2000	1/2-13	1/2	1	1 1/2	4	3	3/16	-	-
IL92-8GX3-P	IL92-8SX3-P	2000	5/8-11	5/8	1	1 1/2	4	3	3/16	-	-
IL92-9GX3-P	IL92-9SX3-P	2000	3/4-10	3/4	1	1 1/2	4	3	3/16	-	-
IL92-10GX3-P	IL92-10SX3-P	2000	1-8	1	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL92-12GX3-P	IL92-12SX3-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL94-4GX3-P	IL94-4SX3-P	100	1/4-20	1/2	1	2 3/8	4	3	3/16	-	-
IL94-5GX3-P	IL94-5SX3-P	500	5/16-18	1/2	1	2 3/8	4	3	3/16	-	-
IL94-6GX3-P	IL94-6SX3-P	2500	3/8-16	1/2	1	2 3/8	4	3	3/16	-	-
IL94-7GX3-P	IL94-7SX3-P	2500	1/2-13	1/2	1	2 3/8	4	3	3/16	-	-
IL94-8GX3-P	IL94-8SX3-P	2500	5/8-11	5/8	1	2 3/8	4	3	3/16	-	-
IL94-9GX3-P	IL94-9SX3-P	2500	3/4-10	3/4	1	2 3/8	4	3	3/16	-	-
IL94-10GX3-P	IL94-10SX3-P	2500	1-8	1	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL94-12GX3-P	IL94-12SX3-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL96-4GX3-H-P	IL96-4SX3-H-P	100	1/4-20	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-5GX3-H-P	IL96-5SX3-H-P	500	5/16-18	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-6GX3-H-P	IL96-6SX3-H-P	3000	3/8-16	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-7GX3-H-P	IL96-7SX3-H-P	3000	1/2-13	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-8GX3-H-P	IL96-8SX3-H-P	3000	5/8-11	5/8	1	3 1/8	4	3	3/16	.39	2.2
IL96-9GX3-H-P	IL96-9SX3-H-P	3000	3/4-10	3/4	1	3 1/8	4	3	3/16	.39	2.2
IL96-10GX3-H-P	IL96-10SX3-H-P	3000	1-8	1	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2
IL96-12GX3-H-P	IL96-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 3-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**




The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

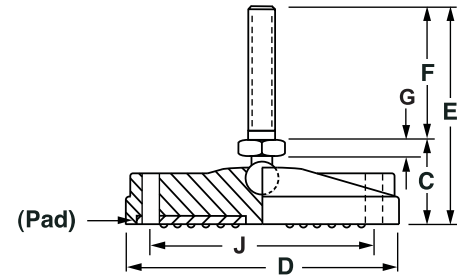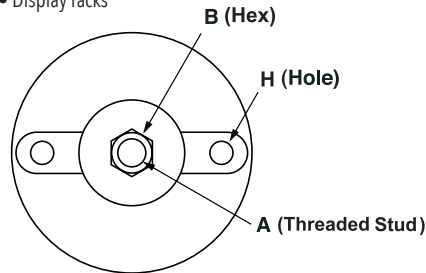**4", 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL98-4GX3-H-P	IL98-4SX3-H-P	100	1/4-20	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-5GX3-H-P	IL98-5SX3-H-P	500	5/16-18	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-6GX3-H-P	IL98-6SX3-H-P	3000	3/8-16	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-7GX3-H-P	IL98-7SX3-H-P	3000	1/2-13	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-8GX3-H-P	IL98-8SX3-H-P	3000	5/8-11	5/8	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-9GX3-H-P	IL98-9SX3-H-P	3000	3/4-10	3/4	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-10GX3-H-P	IL98-10SX3-H-P	3000	1-8	1	1 1/2	4	4 1/2	3	7/16	.51	2.9
IL98-12GX3-H-P	IL98-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	4 1/2	3	7/16	.51	2.9
IL98A-4GX3-H-P	IL98A-4SX3-H-P	100	1/4-20	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-5GX3-H-P	IL98A-5SX3-H-P	500	5/16-18	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-6GX3-H-P	IL98A-6SX3-H-P	3000	3/8-16	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-7GX3-H-P	IL98A-7SX3-H-P	3000	1/2-13	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-8GX3-H-P	IL98A-8SX3-H-P	3000	5/8-11	5/8	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-9GX3-H-P	IL98A-9SX3-H-P	3000	3/4-10	3/4	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-10GX3-H-P	IL98A-10SX3-H-P	3000	1-8	1	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98A-12GX3-H-P	IL98A-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98B-4GX3-H-P	IL98B-4SX3-H-P	100	1/4-20	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-5GX3-H-P	IL98B-5SX3-H-P	500	5/16-18	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-6GX3-H-P	IL98B-6SX3-H-P	3000	3/8-16	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-7GX3-H-P	IL98B-7SX3-H-P	3000	1/2-13	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-8GX3-H-P	IL98B-8SX3-H-P	3000	5/8-11	5/8	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-9GX3-H-P	IL98B-9SX3-H-P	3000	3/4-10	3/4	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-10GX3-H-P	IL98B-10SX3-H-P	3000	1-8	1	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98B-12GX3-H-P	IL98B-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98C-4GX3-H-P	IL98C-4SX3-H-P	100	1/4-20	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-5GX3-H-P	IL98C-5SX3-H-P	500	5/16-18	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-6GX3-H-P	IL98C-6SX3-H-P	3000	3/8-16	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-7GX3-H-P	IL98C-7SX3-H-P	3000	1/2-13	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-8GX3-H-P	IL98C-8SX3-H-P	3000	5/8-11	5/8	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-9GX3-H-P	IL98C-9SX3-H-P	3000	3/4-10	3/4	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-10GX3-H-P	IL98C-10SX3-H-P	3000	1-8	1	1 1/2	10	4 1/2	3	7/16	.51	8.9
IL98C-12GX3-H-P	IL98C-12SX3-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	4 1/2	3	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 4-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**





The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

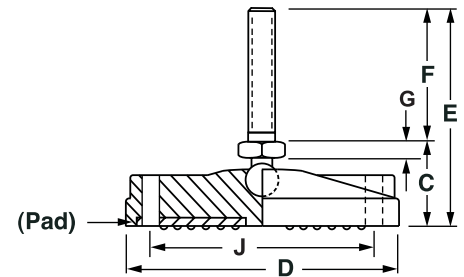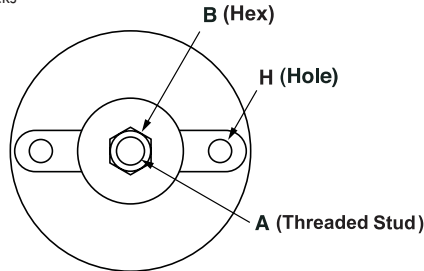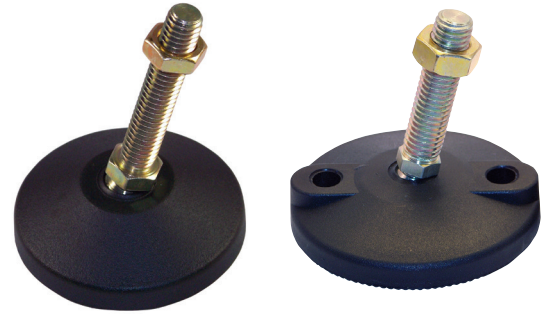**1" to 3-1/8" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL90-5GX4-P	IL90-5SX4-P	500	5/16-18	1/2	1	1	5	4	3/16	-	-
IL90-6GX4-P	IL90-6SX4-P	2000	3/8-16	1/2	1	1	5	4	3/16	-	-
IL90-7GX4-P	IL90-7SX4-P	2000	1/2-13	1/2	1	1	5	4	3/16	-	-
IL90-8GX4-P	IL90-8SX4-P	2000	5/8-11	5/8	1	1	5	4	3/16	-	-
IL90-9GX4-P	IL90-9SX4-P	2000	3/4-10	3/4	1	1	5	4	3/16	-	-
IL90-10GX4-P	IL90-10SX4-P	2000	1-8	1	1 1/4	1	5 1/4	4	7/16	-	-
IL90-12GX4-P	IL90-12SX4-P	2000	1 1/4-7	1 1/4	1 1/4	1	5 1/4	4	7/16	-	-
IL92-5GX4-P	IL92-5SX4-P	500	5/16-18	1/2	1	1	5	4	3/16	-	-
IL92-6GX4-P	IL92-6SX4-P	2000	3/8-16	1/2	1	1	5	4	3/16	-	-
IL92-7GX4-P	IL92-7SX4-P	2000	1/2-13	1/2	1	1	5	4	3/16	-	-
IL92-8GX4-P	IL92-8SX4-P	2000	5/8-11	5/8	1	1	5	4	3/16	-	-
IL92-9GX4-P	IL92-9SX4-P	2000	3/4-10	3/4	1	1	5	4	3/16	-	-
IL92-10GX4-P	IL92-10SX4-P	2000	1-8	1	1 1/4	1	5 1/4	4	7/16	-	-
IL92-12GX4-P	IL92-12SX4-P	2000	1 1/4-7	1 1/4	1 1/4	1	5 1/4	4	7/16	-	-
IL94-5GX4-P	IL94-5SX4-P	500	5/16-18	1/2	1	2 3/8	5	4	3/16	-	-
IL94-6GX4-P	IL94-6SX4-P	2500	3/8-16	1/2	1	2 3/8	5	4	3/16	-	-
IL94-7GX4-P	IL94-7SX4-P	2500	1/2-13	1/2	1	2 3/8	5	4	3/16	-	-
IL94-8GX4-P	IL94-8SX4-P	2500	5/8-11	5/8	1	2 3/8	5	4	3/16	-	-
IL94-9GX4-P	IL94-9SX4-P	2500	3/4-10	3/4	1	2 3/8	5	4	3/16	-	-
IL94-10GX4-P	IL94-10SX4-P	2500	1-8	1	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL94-12GX4-P	IL94-12SX4-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL96-5GX4-H-P	IL96-5SX4-H-P	500	5/16-18	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-6GX4-H-P	IL96-6SX4-H-P	3000	3/8-16	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-7GX4-H-P	IL96-7SX4-H-P	3000	1/2-13	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-8GX4-H-P	IL96-8SX4-H-P	3000	5/8-11	5/8	1	3 1/8	5	4	3/16	.39	2.2
IL96-9GX4-H-P	IL96-9SX4-H-P	3000	3/4-10	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-10GX4-H-P	IL96-10SX4-H-P	3000	1-8	1	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2
IL96-12GX4-H-P	IL96-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 4-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**





The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

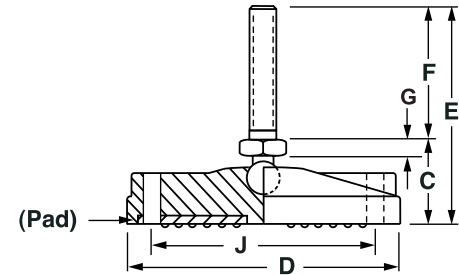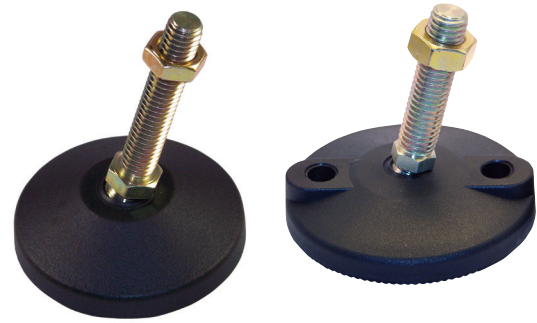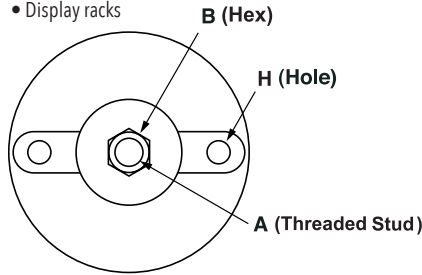**4", 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—4" Stud and Rubber Pad											
IL98-5GX4-H-P	IL98-5SX4-H-P	500	5/16-18	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-6GX4-H-P	IL98-6SX4-H-P	3000	3/8-16	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-7GX4-H-P	IL98-7SX4-H-P	3000	1/2-13	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-8GX4-H-P	IL98-8SX4-H-P	3000	5/8-11	5/8	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-9GX4-H-P	IL98-9SX4-H-P	3000	3/4-10	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-10GX4-H-P	IL98-10SX4-H-P	3000	1-8	1	1 1/2	4	5 1/2	4	7/16	.51	2.9
IL98-12GX4-H-P	IL98-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	5 1/2	4	7/16	.51	2.9
IL98A-5GX4-H-P	IL98A-5SX4-H-P	500	5/16-18	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-6GX4-H-P	IL98A-6SX4-H-P	3000	3/8-16	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-7GX4-H-P	IL98A-7SX4-H-P	3000	1/2-13	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-8GX4-H-P	IL98A-8SX4-H-P	3000	5/8-11	5/8	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-9GX4-H-P	IL98A-9SX4-H-P	3000	3/4-10	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-10GX4-H-P	IL98A-10SX4-H-P	3000	1-8	1	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98A-12GX4-H-P	IL98A-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98B-5GX4-H-P	IL98B-5SX4-H-P	500	5/16-18	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-6GX4-H-P	IL98B-6SX4-H-P	3000	3/8-16	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-7GX4-H-P	IL98B-7SX4-H-P	3000	1/2-13	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-8GX4-H-P	IL98B-8SX4-H-P	3000	5/8-11	5/8	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-9GX4-H-P	IL98B-9SX4-H-P	3000	3/4-10	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-10GX4-H-P	IL98B-10SX4-H-P	3000	1-8	1	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98B-12GX4-H-P	IL98B-12SX4-H-P	7500	1 1/4-7	1 1/4	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98C-5GX4-H-P	IL98C-5SX4-H-P	500	5/16-18	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-6GX4-H-P	IL98C-6SX4-H-P	3000	3/8-16	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-7GX4-H-P	IL98C-7SX4-H-P	3000	1/2-13	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-8GX4-H-P	IL98C-8SX4-H-P	3000	5/8-11	5/8	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-9GX4-H-P	IL98C-9SX4-H-P	3000	3/4-10	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-10GX4-H-P	IL98C-10SX4-H-P	3000	1-8	1	1 1/2	10	5 1/2	4	7/16	.51	8.9
IL98C-12GX4-H-P	IL98C-12SX4-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	5 1/2	4	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 5-INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad





The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

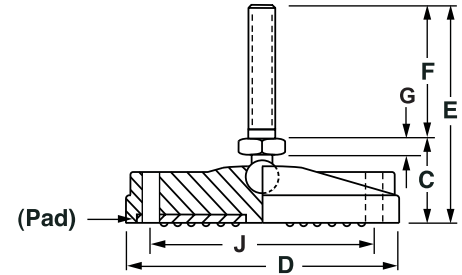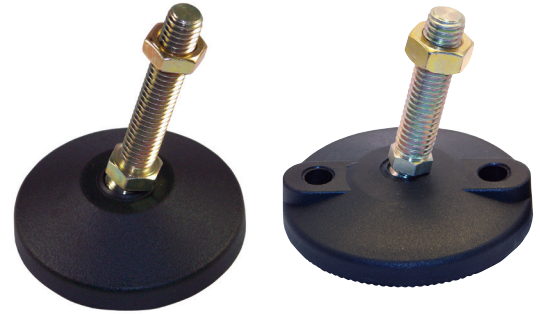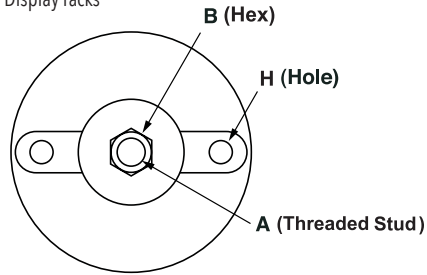

1 to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL90-6GX5-P	IL90-6SX5-P	2000	3/8-16	1/2	1	1	6	5	3/16	-	-
IL90-7GX5-P	IL90-7SX5-P	2000	1/2-13	1/2	1	1	6	5	3/16	-	-
IL90-8GX5-P	IL90-8SX5-P	2000	5/8-11	5/8	1	1	6	5	3/16	-	-
IL90-9GX5-P	IL90-9SX5-P	2000	3/4-10	3/4	1	1	6	5	3/16	-	-
IL90-10GX5-P	IL90-10SX5-P	2000	1-8	1	1 1/4	1	6 1/4	5	7/16	-	-
IL90-12GX5-P	IL90-12SX5-P	2000	1 1/4-7	1 1/4	1 1/4	1	6 1/4	5	7/16	-	-
IL92-6GX5-P	IL92-6SX5-P	2000	3/8-16	1/2	1	1 1/2	6	5	3/16	-	-
IL92-7GX5-P	IL92-7SX5-P	2000	1/2-13	1/2	1	1 1/2	6	5	3/16	-	-
IL92-8GX5-P	IL92-8SX5-P	2000	5/8-11	5/8	1	1 1/2	6	5	3/16	-	-
IL92-9GX5-P	IL92-9SX5-P	2000	3/4-10	3/4	1	1 1/2	6	5	3/16	-	-
IL92-10GX5-P	IL92-10SX5-P	2000	1-8	1	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL92-12GX5-P	IL92-12SX5-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL94-6GX5-P	IL94-6SX5-P	2500	3/8-16	1/2	1	2 3/8	6	5	3/16	-	-
IL94-7GX5-P	IL94-7SX5-P	2500	1/2-13	1/2	1	2 3/8	6	5	3/16	-	-
IL94-8GX5-P	IL94-8SX5-P	2500	5/8-11	5/8	1	2 3/8	6	5	3/16	-	-
IL94-9GX5-P	IL94-9SX5-P	2500	3/4-10	3/4	1	2 3/8	6	5	3/16	-	-
IL94-10GX5-P	IL94-10SX5-P	2500	1-8	1	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL94-12GX5-P	IL94-12SX5-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL96-6GX5-H-P	IL96-6SX5-H-P	3000	3/8-16	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-7GX5-H-P	IL96-7SX5-H-P	3000	1/2-13	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-8GX5-H-P	IL96-8SX5-H-P	3000	5/8-11	5/8	1	3 1/8	6	5	3/16	.39	2.2
IL96-9GX5-H-P	IL96-9SX5-H-P	3000	3/4-10	3/4	1	3 1/8	6	5	3/16	.39	2.2
IL96-10GX5-H-P	IL96-10SX5-H-P	3000	1-8	1	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2
IL96-12GX5-H-P	IL96-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 5-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**





The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

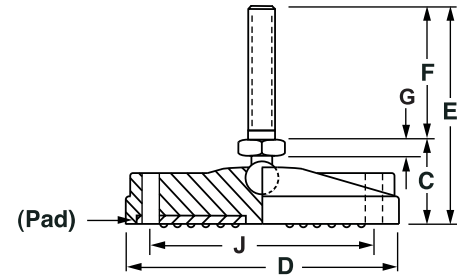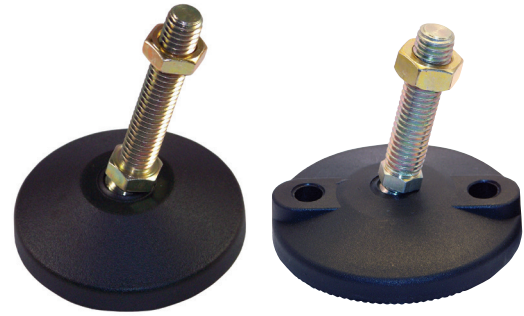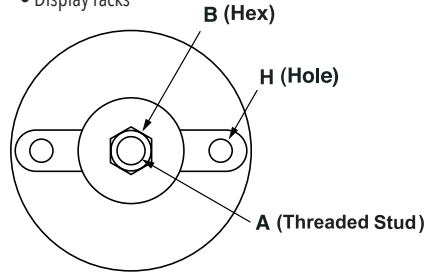**4", 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL98-6GX5-H-P	IL98-6SX5-H-P	3000	3/8-16	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-7GX5-H-P	IL98-7SX5-H-P	3000	1/2-13	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-8GX5-H-P	IL98-8SX5-H-P	3000	5/8-11	5/8	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-9GX5-H-P	IL98-9SX5-H-P	3000	3/4-10	3/4	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-10GX5-H-P	IL98-10SX5-H-P	3000	1-8	1	1 1/2	4	6 1/2	5	7/16	.51	2.9
IL98-12GX5-H-P	IL98-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	6 1/2	5	7/16	.51	2.9
IL98A-6GX5-H-P	IL98A-6SX5-H-P	3000	3/8-16	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-7GX5-H-P	IL98A-7SX5-H-P	3000	1/2-13	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-8GX5-H-P	IL98A-8SX5-H-P	3000	5/8-11	5/8	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-9GX5-H-P	IL98A-9SX5-H-P	3000	3/4-10	3/4	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-10GX5-H-P	IL98A-10SX5-H-P	3000	1-8	1	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98A-12GX5-H-P	IL98A-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98B-6GX5-H-P	IL98B-6SX5-H-P	3000	3/8-16	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-7GX5-H-P	IL98B-7SX5-H-P	3000	1/2-13	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-8GX5-H-P	IL98B-8SX5-H-P	3000	5/8-11	5/8	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-9GX5-H-P	IL98B-9SX5-H-P	3000	3/4-10	3/4	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-10GX5-H-P	IL98B-10SX5-H-P	3000	1-8	1	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98B-12GX5-H-P	IL98B-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98C-6GX5-H-P	IL98C-6SX5-H-P	3000	3/8-16	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-7GX5-H-P	IL98C-7SX5-H-P	3000	1/2-13	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-8GX5-H-P	IL98C-8SX5-H-P	3000	5/8-11	5/8	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-9GX5-H-P	IL98C-9SX5-H-P	3000	3/4-10	3/4	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-10GX5-H-P	IL98C-10SX5-H-P	3000	1-8	1	1 1/2	10	6 1/2	5	7/16	.51	8.9
IL98C-12GX5-H-P	IL98C-12SX5-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	6 1/2	5	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



NYLON SWIVEL STUD LEVELERS – with Rubber Pad





The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

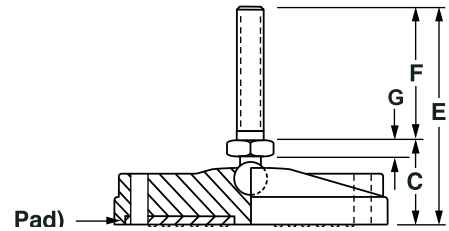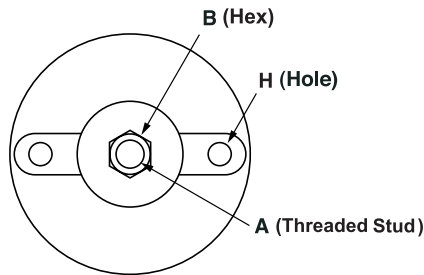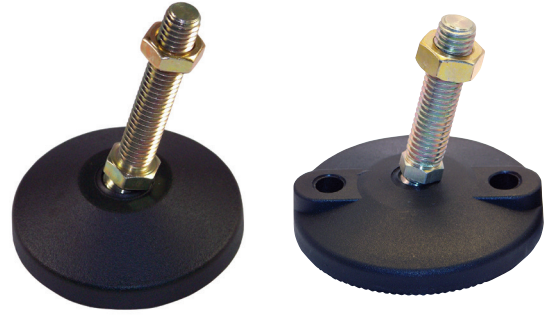

1" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—6" Stud and Rubber Pad											
IL90-6GX6-P	IL90-6SX6-P	2000	3/8-16	1/2	1	1	7	6	3/16	-	-
IL90-7GX6-P	IL90-7SX6-P	2000	1/2-13	1/2	1	1	7	6	3/16	-	-
IL90-8GX6-P	IL90-8SX6-P	2000	5/8-11	5/8	1	1	7	6	3/16	-	-
IL90-9GX6-P	IL90-9SX6-P	2000	3/4-10	3/4	1	1	7	6	3/16	-	-
IL90-10GX6-P	IL90-10SX6-P	2000	1-8	1	1 1/4	1	7 1/4	6	7/16	-	-
IL90-12GX6-P	IL90-12SX6-P	2000	1 1/4-7	1 1/4	1 1/4	1	7 1/4	6	7/16	-	-
IL92-6GX6-P	IL92-6SX6-P	2000	3/8-16	1/2	1	1 1/2	7	6	3/16	-	-
IL92-7GX6-P	IL92-7SX6-P	2000	1/2-13	1/2	1	1 1/2	7	6	3/16	-	-
IL92-8GX6-P	IL92-8SX6-P	2000	5/8-11	5/8	1	1 1/2	7	6	3/16	-	-
IL92-9GX6-P	IL92-9SX6-P	2000	3/4-10	3/4	1	1 1/2	7	6	3/16	-	-
IL92-10GX6-P	IL92-10SX6-P	2000	1-8	1	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL92-12GX6-P	IL92-12SX6-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL94-6GX6-P	IL94-6SX6-P	2500	3/8-16	1/2	1	2 3/8	7	6	3/16	-	-
IL94-7GX6-P	IL94-7SX6-P	2500	1/2-13	1/2	1	2 3/8	7	6	3/16	-	-
IL94-8GX6-P	IL94-8SX6-P	2500	5/8-11	5/8	1	2 3/8	7	6	3/16	-	-
IL94-9GX6-P	IL94-9SX6-P	2500	3/4-10	3/4	1	2 3/8	7	6	3/16	-	-
IL94-10GX6-P	IL94-10SX6-P	2500	1-8	1	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL94-12GX6-P	IL94-12SX6-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL96-6GX6-H-P	IL96-6SX6-H-P	3000	3/8-16	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-7GX6-H-P	IL96-7SX6-H-P	3000	1/2-13	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-8GX6-H-P	IL96-8SX6-H-P	3000	5/8-11	5/8	1	3 1/8	7	6	3/16	.39	2.2
IL96-9GX6-H-P	IL96-9SX6-H-P	3000	3/4-10	3/4	1	3 1/8	7	6	3/16	.39	2.2
IL96-10GX6-H-P	IL96-10SX6-H-P	3000	1-8	1	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2
IL96-12GX6-H-P	IL96-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**NYLON SWIVEL 6-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**





The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add ".BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

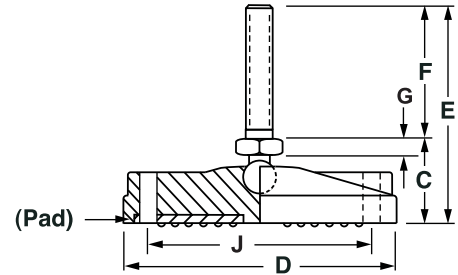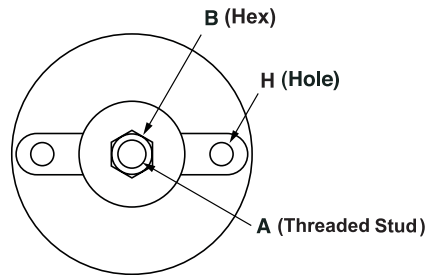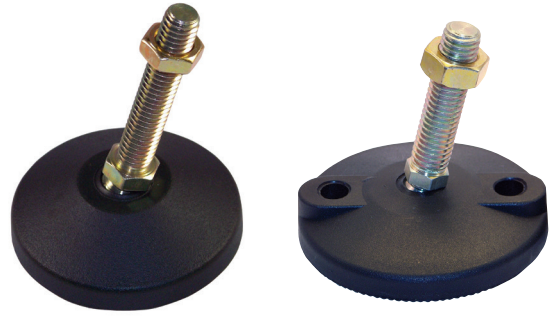**4", 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—6" Stud and Rubber Pad											
IL98-6GX6-H-P	IL98-6SX6-H-P	3000	3/8-16	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-7GX6-H-P	IL98-7SX6-H-P	3000	1/2-13	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-8GX6-H-P	IL98-8SX6-H-P	3000	5/8-11	5/8	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-9GX6-H-P	IL98-9SX6-H-P	3000	3/4-10	3/4	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-10GX6-H-P	IL98-10SX6-H-P	3000	1-8	1	1 1/2	4	7 1/2	6	7/16	.51	2.9
IL98-12GX6-H-P	IL98-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	7 1/2	6	7/16	.51	2.9
IL98A-6GX6-H-P	IL98A-6SX6-H-P	3000	3/8-16	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-7GX6-H-P	IL98A-7SX6-H-P	3000	1/2-13	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-8GX6-H-P	IL98A-8SX6-H-P	3000	5/8-11	5/8	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-9GX6-H-P	IL98A-9SX6-H-P	3000	3/4-10	3/4	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-10GX6-H-P	IL98A-10SX6-H-P	3000	1-8	1	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98A-12GX6-H-P	IL98A-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98B-6GX6-H-P	IL98B-6SX6-H-P	3000	3/8-16	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-7GX6-H-P	IL98B-7SX6-H-P	3000	1/2-13	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-8GX6-H-P	IL98B-8SX6-H-P	3000	5/8-11	5/8	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-9GX6-H-P	IL98B-9SX6-H-P	3000	3/4-10	3/4	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-10GX6-H-P	IL98B-10SX6-H-P	3000	1-8	1	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98B-12GX6-H-P	IL98B-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98C-6GX6-H-P	IL98C-6SX6-H-P	3000	3/8-16	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-7GX6-H-P	IL98C-7SX6-H-P	3000	1/2-13	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-8GX6-H-P	IL98C-8SX6-H-P	3000	5/8-11	5/8	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-9GX6-H-P	IL98C-9SX6-H-P	3000	3/4-10	3/4	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-10GX6-H-P	IL98C-10SX6-H-P	3000	1-8	1	1 1/2	10	7 1/2	6	7/16	.51	8.9
IL98C-12GX6-H-P	IL98C-12SX6-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	7 1/2	6	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 8-INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad



The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

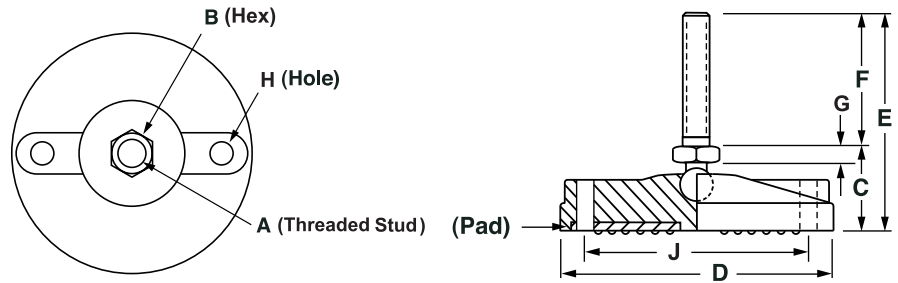

1" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-8" Stud and Rubber Pad											
IL90-7GX8-P	IL90-7SX8-P	2000	1/2-13	1/2	1	1	9	8	3/16	-	-
IL90-8GX8-P	IL90-8SX8-P	2000	5/8-11	5/8	1	1	9	8	3/16	-	-
IL90-9GX8-P	IL90-9SX8-P	2000	3/4-10	3/4	1	1	9	8	3/16	-	-
IL90-10GX8-P	IL90-10SX8-P	2000	1-8	1	1 1/4	1	9 1/4	8	7/16	-	-
IL90-12GX8-P	IL90-12SX8-P	2000	1 1/4-7	1 1/4	1 1/4	1	9 1/4	8	7/16	-	-
IL92-7GX8-P	IL92-7SX8-P	2000	1/2-13	1/2	1	1 1/2	9	8	3/16	-	-
IL92-8GX8-P	IL92-8SX8-P	2000	5/8-11	5/8	1	1 1/2	9	8	3/16	-	-
IL92-9GX8-P	IL92-9SX8-P	2000	3/4-10	3/4	1	1 1/2	9	8	3/16	-	-
IL92-10GX8-P	IL92-10SX8-P	2000	1-8	1	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL92-12GX8-P	IL92-12SX8-P	2000	1 1/4-7	1 1/4	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL94-7GX8-P	IL94-7SX8-P	2500	1/2-13	1/2	1	2 3/8	9	8	3/16	-	-
IL94-8GX8-P	IL94-8SX8-P	2500	5/8-11	5/8	1	2 3/8	9	8	3/16	-	-
IL94-9GX8-P	IL94-9SX8-P	2500	3/4-10	3/4	1	2 3/8	9	8	3/16	-	-
IL94-10GX8-P	IL94-10SX8-P	2500	1-8	1	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL94-12GX8-P	IL94-12SX8-P	2500	1 1/4-7	1 1/4	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL96-7GX8-H-P	IL96-7SX8-H-P	3000	1/2-13	1/2	1	3 1/8	9	8	3/16	.39	2.2
IL96-8GX8-H-P	IL96-8SX8-H-P	3000	5/8-11	5/8	1	3 1/8	9	8	3/16	.39	2.2
IL96-9GX8-H-P	IL96-9SX8-H-P	3000	3/4-10	3/4	1	3 1/8	9	8	3/16	.39	2.2
IL96-10GX8-H-P	IL96-10SX8-H-P	3000	1-8	1	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2
IL96-12GX8-H-P	IL96-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL 8 INCH STUD

NYLON SWIVEL STUD LEVELERS – with Rubber Pad





The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

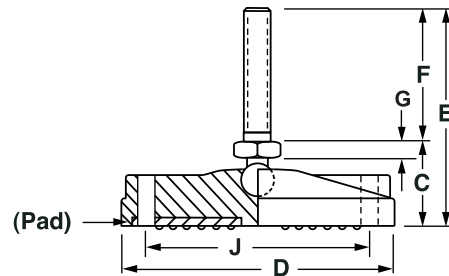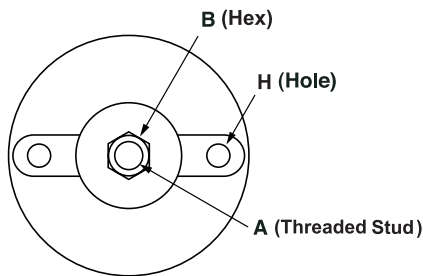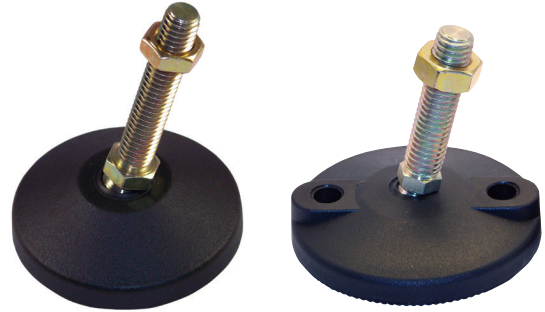

4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—8" Stud and Rubber Pad											
IL98-7GX8-H-P	IL98-7SX8-H-P	3000	1/2-13	1/2	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-8GX8-H-P	IL98-8SX8-H-P	3000	5/8-11	5/8	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-9GX8-H-P	IL98-9SX8-H-P	3000	3/4-10	3/4	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-10GX8-H-P	IL98-10SX8-H-P	3000	1-8	1	1 1/2	4	9 1/2	8	7/16	.51	2.9
IL98-12GX8-H-P	IL98-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	4	9 1/2	8	7/16	.51	2.9
IL98A-7GX8-H-P	IL98A-7SX8-H-P	3000	1/2-13	1/2	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-8GX8-H-P	IL98A-8SX8-H-P	3000	5/8-11	5/8	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-9GX8-H-P	IL98A-9SX8-H-P	3000	3/4-10	3/4	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-10GX8-H-P	IL98A-10SX8-H-P	3000	1-8	1	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98A-12GX8-H-P	IL98A-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98B-7GX8-H-P	IL98B-7SX8-H-P	3000	1/2-13	1/2	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-8GX8-H-P	IL98B-8SX8-H-P	3000	5/8-11	5/8	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-9GX8-H-P	IL98B-9SX8-H-P	3000	3/4-10	3/4	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-10GX8-H-P	IL98B-10SX8-H-P	3000	1-8	1	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98B-12GX8-H-P	IL98B-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98C-7GX8-H-P	IL98C-7SX8-H-P	3000	1/2-13	1/2	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-8GX8-H-P	IL98C-8SX8-H-P	3000	5/8-11	5/8	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-9GX8-H-P	IL98C-9SX8-H-P	3000	3/4-10	3/4	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-10GX8-H-P	IL98C-10SX8-H-P	3000	1-8	1	1 1/2	10	9 1/2	8	7/16	.51	8.9
IL98C-12GX8-H-P	IL98C-12SX8-H-P	3000	1 1/4-7	1 1/4	1 1/2	10	9 1/2	8	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 1" & 2" STUD

NYLON METRIC SWIVEL STUD STYLE**LEVELERS – with Rubber Pad**




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- M6 & M8 available in 1" (25mm) length
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

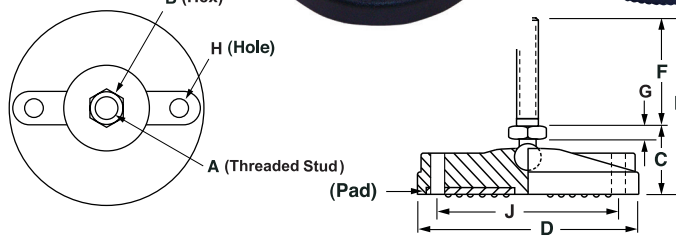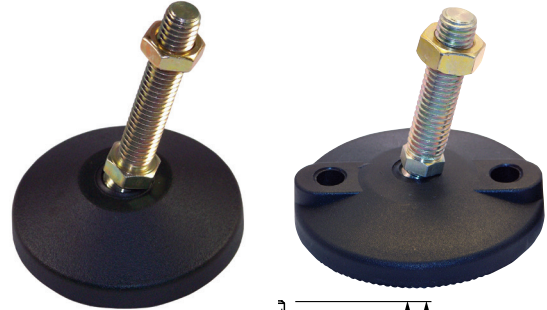**Metric Threads: 1" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—2" Stud and Rubber Pad											
IL90-M6Gx1-P	IL90-M6Sx1-P	100	M6X1	1/2	1	1	2	1	3/16	-	-
IL90-M8Gx1-P	IL90-M8Sx1-P	500	M8X1.25	1/2	1	1	2	1	3/16	-	-
IL90-M6G-P	IL90-M6S-P	100	M6X1	1/2	1	1	3	2	3/16	-	-
IL90-M8G-P	IL90-M8S-P	500	M8X1.25	1/2	1	1	2	2	3/16	-	-
IL90-M10G-P	IL90-M10S-P	2000	M10X1.50	1/2	1	1	3	2	3/16	-	-
IL90-M12G-P	IL90-M12S-P	2000	M12X1.75	1/2	1	1	3	2	3/16	-	-
IL90-M16G-P	IL90-M16S-P	2000	M16X2.00	5/8	1	1	3	2	3/16	-	-
IL90-M20G-P	IL90-M20S-P	2000	M20X2.50	3/4	1	1	3	2	3/16	-	-
IL90-M24G-P	IL90-M24S-P	2000	M24X3.00	1	1-1/4	1	3-1/4	2	7/16	-	-
IL92-M6Gx1-P	IL92-M6Sx1-P	100	M6X1	1/2	1	1-1/2	2	1	3/16	-	-
IL92-M8Gx1-P	IL92-M8Sx1-P	500	M8X1.25	1/2	1	1-1/2	2	1	3/16	-	-
IL92-M6G-P	IL92-M6S-P	100	M6X1	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M8G-P	IL92-M8S-P	500	M8X1.25	1/2	1	1-1/2	2	2	3/16	-	-
IL92-M10G-P	IL92-M10S-P	2000	M10X1.50	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M12G-P	IL92-M12S-P	2000	M12X1.75	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M16G-P	IL92-M16S-P	2000	M16X2.00	5/8	1	1-1/2	3	2	3/16	-	-
IL92-M20G-P	IL92-M20S-P	2000	M20X2.50	3/4	1	1-1/2	3	2	3/16	-	-
IL92-M24G-P	IL92-M24S-P	2000	M24X3.00	1	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL94-M6Gx1-P	IL94-M6Sx1-P	100	M6X1	1/2	1	2-3/8	2	1	3/16	-	-
IL94-M8Gx1-P	IL94-M8Sx1-P	500	M8X1.25	1/2	1	2-3/8	2	1	3/16	-	-
IL94-M6G-P	IL94-M6S-P	100	M6X1	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M8G-P	IL94-M8S-P	500	M8X1.25	1/2	1	2-3/8	2	2	3/16	-	-
IL94-M10G-P	IL94-M10S-P	2500	M10X1.50	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M12G-P	IL94-M12S-P	2500	M12X1.75	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M16G-P	IL94-M16S-P	2500	M16X2.00	5/8	1	2-3/8	3	2	3/16	-	-
IL94-M20G-P	IL94-M20S-P	2500	M20X2.50	3/4	1	2-3/8	3	2	3/16	-	-
IL94-M24G-P	IL94-M24S-P	2500	M24X3.00	1	1-1/4	2-3/8	3-1/4	2	7/16	-	-
IL96-M6Gx1-H-P	IL96-M6Sx1-H-P	100	M6X1	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-M8Gx1-H-P	IL96-M8Sx1-H-P	500	M8X1.25	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-M6G-H-P	IL96-M6S-H-P	100	M6X1	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M8G-H-P	IL96-M8S-H-P	500	M8X1.25	1/2	1	3-1/8	2	2	3/16	.39	2.2
IL96-M10G-H-P	IL96-M10S-H-P	3000	M10X1.50	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M12G-H-P	IL96-M12S-H-P	3000	M12X1.75	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M16G-H-P	IL96-M16S-H-P	3000	M16X2.00	5/8	1	3-1/8	3	2	3/16	.39	2.2
IL96-M20G-H-P	IL96-M20S-H-P	3000	M20X2.50	3/4	1	3-1/8	3	2	3/16	.39	2.2
IL96-M24G-H-P	IL96-M24S-H-P	3000	M24X3.00	1	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 1" & 2" STUD

NYLON METRIC SWIVEL STUD STYLE**LEVELERS – with Rubber Pad**




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

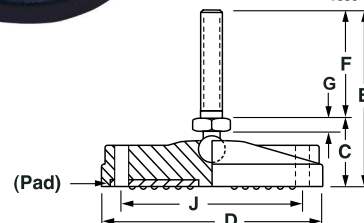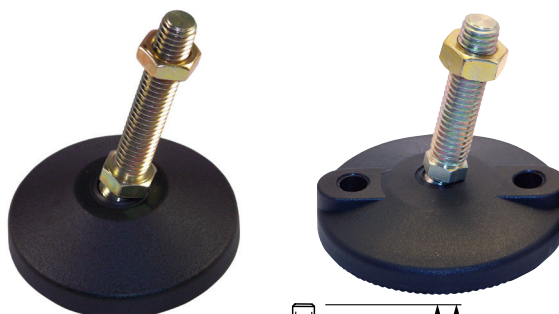**Metric Threads: 4", 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-2" Stud and Rubber Pad											
IL98-M6Gx1-H-P	IL98-M6Sx1-H-P	100	M6X1	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-M8Gx1-H-P	IL98-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-M6G-H-P	IL98-M6S-H-P	100	M6X1	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M8G-H-P	IL98-M8S-H-P	500	M8X1.25	1/2	1-1/4	4	2-1/4	2	3/16	.51	2.9
IL98-M10G-H-P	IL98-M10S-H-P	3000	M10X1.50	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M12G-H-P	IL98-M12S-H-P	3000	M12X1.75	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M16G-H-P	IL98-M16S-H-P	3000	M16X2.00	5/8	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M20G-H-P	IL98-M20S-H-P	3000	M20X2.50	3/4	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M24G-H-P	IL98-M24S-H-P	3000	M24X3.00	1	1-1/2	4	3-1/2	2	7/16	.51	2.9
IL98A-M6Gx1-H-P	IL98A-M6Sx1-H-P	100	M6X1	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-M8Gx1-H-P	IL98A-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-M6G-H-P	IL98A-M6S-H-P	100	M6X1	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M8G-H-P	IL98A-M8S-H-P	500	M8X1.25	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M10G-H-P	IL98A-M10S-H-P	3000	M10X1.50	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M12G-H-P	IL98A-M12S-H-P	3000	M12X1.75	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M16G-H-P	IL98A-M16S-H-P	3000	M16X2.00	5/8	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M20G-H-P	IL98A-M20S-H-P	3000	M20X2.50	3/4	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M24G-H-P	IL98A-M24S-H-P	3000	M24X3.00	1	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98B-M6Gx1-H-P	IL98B-M6Sx1-H-P	100	M6X1	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-M8Gx1-H-P	IL98B-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-M6G-H-P	IL98B-M6S-H-P	100	M6X1	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M8G-H-P	IL98B-M8S-H-P	500	M8X1.25	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M10G-H-P	IL98B-M10S-H-P	3000	M10X1.50	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M12G-H-P	IL98B-M12S-H-P	3000	M12X1.75	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M16G-H-P	IL98B-M16S-H-P	3000	M16X2.00	5/8	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M20G-H-P	IL98B-M20S-H-P	3000	M20X2.50	3/4	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M24G-H-P	IL98B-M24S-H-P	3000	M24X3.00	1	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98C-M6Gx1-H-P	IL98C-M6Sx1-H-P	100	M6X1	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-M8Gx1-H-P	IL98C-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-M6G-H-P	IL98C-M6S-H-P	100	M6X1	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M8G-H-P	IL98C-M8S-H-P	500	M8X1.25	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M10G-H-P	IL98C-M10S-H-P	3000	M10X1.50	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M12G-H-P	IL98C-M12S-H-P	3000	M12X1.75	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M16G-H-P	IL98C-M16S-H-P	3000	M16X2.00	5/8	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M20G-H-P	IL98C-M20S-H-P	3000	M20X2.50	3/4	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M24G-H-P	IL98C-M24S-H-P	3000	M24X3.00	1	1-1/2	10	3-1/2	2	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 3" STUD

NYLON METRIC SWIVEL STUD STYLE**LEVELERS – with Rubber Pad**




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

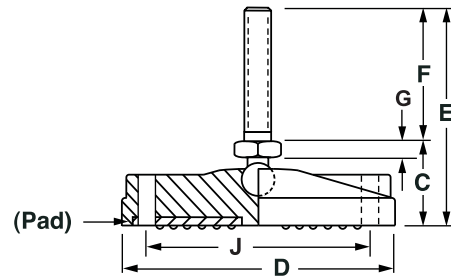**Metric Threads: 1" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL90-M6GX3-P	IL90-M6SX3-P	100	M6X1	1/2	1	1	4	3	3/16	-	-
IL90-M8GX3-P	IL90-M8SX3-P	500	M8X1.25	1/2	1	1	4	3	3/16	-	-
IL90-M10GX3-P	IL90-M10SX3-P	2000	M10X1.50	1/2	1	1	4	3	3/16	-	-
IL90-M12GX3-P	IL90-M12SX3-P	2000	M12X1.75	1/2	1	1	4	3	3/16	-	-
IL90-M16GX3-P	IL90-M16SX3-P	2000	M16X2.00	5/8	1	1	4	3	3/16	-	-
IL90-M20GX3-P	IL90-M20SX3-P	2000	M20X2.50	3/4	1	1	4	3	3/16	-	-
IL90-M24GX3-P	IL90-M24SX3-P	2000	M24X3.00	1	1 1/4	1	4 1/4	3	7/16	-	-
IL92-M6GX3-P	IL92-M6SX3-P	100	M6X1	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M8GX3-P	IL92-M8SX3-P	500	M8X1.25	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M10GX3-P	IL92-M10SX3-P	2000	M10X1.50	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M12GX3-P	IL92-M12SX3-P	2000	M12X1.75	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M16GX3-P	IL92-M16SX3-P	2000	M16X2.00	5/8	1	1 1/2	4	3	3/16	-	-
IL92-M20GX3-P	IL92-M20SX3-P	2000	M20X2.50	3/4	1	1 1/2	4	3	3/16	-	-
IL92-M24GX3-P	IL92-M24SX3-P	2000	M24X3.00	1	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL94-M6GX3-P	IL94-M6SX3-P	100	M6X1	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M8GX3-P	IL94-M8SX3-P	500	M8X1.25	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M10GX3-P	IL94-M10SX3-P	2500	M10X1.50	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M12GX3-P	IL94-M12SX3-P	2500	M12X1.75	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M16GX3-P	IL94-M16SX3-P	2500	M16X2.00	5/8	1	2 3/8	4	3	3/16	-	-
IL94-M20GX3-P	IL94-M20SX3-P	2500	M20X2.50	3/4	1	2 3/8	4	3	3/16	-	-
IL94-M24GX3-P	IL94-M24SX3-P	2500	M24X3.00	1	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL96-M6GX3-H-P	IL96-M6SX3-H-P	100	M6X1	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M8GX3-H-P	IL96-M8SX3-H-P	500	M8X1.25	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M10GX3-H-P	IL96-M10SX3-H-P	3000	M10X1.50	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M12GX3-H-P	IL96-M12SX3-H-P	3000	M12X1.75	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M16GX3-H-P	IL96-M16SX3-H-P	3000	M16X2.00	5/8	1	3 1/8	4	3	3/16	.39	2.2
IL96-M20GX3-H-P	IL96-M20SX3-H-P	3000	M20X2.50	3/4	1	3 1/8	4	3	3/16	.39	2.2
IL96-M24GX3-H-P	IL96-M24SX3-H-P	3000	M24X3.00	1	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 3" STUD

NYLON METRIC SWIVEL STUD STYLE**LEVELERS – with Rubber Pad**




The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

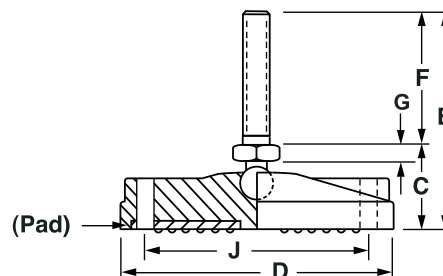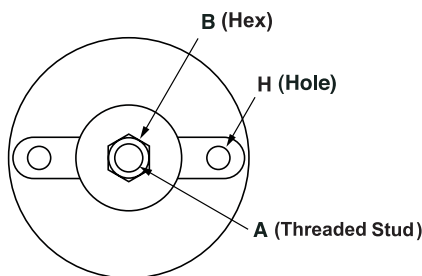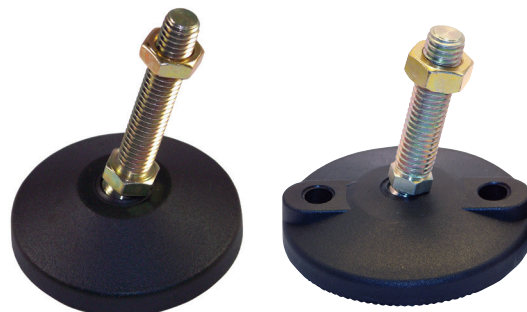**Metric Threads: 4", 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL98-M6GX3-H-P	IL98-M6SX3-H-P	100	M6X1	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M8GX3-H-P	IL98-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M10GX3-H-P	IL98-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M12GX3-H-P	IL98-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M16GX3-H-P	IL98-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M20GX3-H-P	IL98-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M24GX3-H-P	IL98-M24SX3-H-P	3000	M24X3.00	1	1 1/2	4	4 1/2	3	7/16	.51	2.9
IL98A-M6GX3-H-P	IL98A-M6SX3-H-P	100	M6X1	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M8GX3-H-P	IL98A-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M10GX3-H-P	IL98A-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M12GX3-H-P	IL98A-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M16GX3-H-P	IL98A-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M20GX3-H-P	IL98A-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M24GX3-H-P	IL98A-M24SX3-H-P	3000	M24X3.00	1	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98B-M6GX3-H-P	IL98B-M6SX3-H-P	100	M6X1	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M8GX3-H-P	IL98B-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M10GX3-H-P	IL98B-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M12GX3-H-P	IL98B-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M16GX3-H-P	IL98B-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M20GX3-H-P	IL98B-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M24GX3-H-P	IL98B-M24SX3-H-P	3000	M24X3.00	1	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98C-M6GX3-H-P	IL98C-M6SX3-H-P	100	M6X1	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M8GX3-H-P	IL98C-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M10GX3-H-P	IL98C-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M12GX3-H-P	IL98C-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M16GX3-H-P	IL98C-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M20GX3-H-P	IL98C-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M24GX3-H-P	IL98C-M24SX3-H-P	3000	M24X3.00	1	1 1/2	10	4 1/2	3	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 4" STUD

**NYLON METRIC SWIVEL STUD STYLE
LEVELERS – with Rubber Pad**





The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

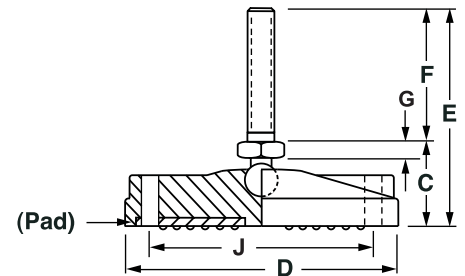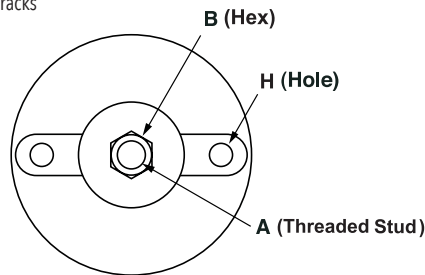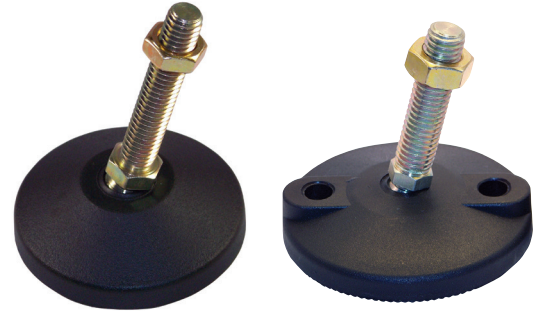**Metric Threads: 1" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL90-M8GX4-P	IL90-M8SX4-P	500	M8X1.25	1/2	1	1	5	4	3/16	-	-
IL90-M10GX4-P	IL90-M10SX4-P	2000	M10X1.50	1/2	1	1	5	4	3/16	-	-
IL90-M12GX4-P	IL90-M12SX4-P	2000	M12X1.75	5/8	1	1	5	4	3/16	-	-
IL90-M16GX4-P	IL90-M16SX4-P	2000	M16X2.00	3/4	1	1	5	4	3/16	-	-
IL90-M20GX4-P	IL90-M20SX4-P	2000	M20X2.50	3/4	1	1	5	4	3/16	-	-
IL90-M24GX4-P	IL90-M24SX4-P	2000	M24X3.00	1	1 1/4	1	5 1/4	4	7/16	-	-
IL92-M8GX4-P	IL92-M8SX4-P	500	M8X1.25	1/2	1	1 1/2	5	4	3/16	-	-
IL92-M10GX4-P	IL92-M10SX4-P	2000	M10X1.50	1/2	1	1 1/2	5	4	3/16	-	-
IL92-M12GX4-P	IL92-M12SX4-P	2000	M12X1.75	5/8	1	1 1/2	5	4	3/16	-	-
IL92-M16GX4-P	IL92-M16SX4-P	2000	M16X2.00	3/4	1	1 1/2	5	4	3/16	-	-
IL92-M20GX4-P	IL92-M20SX4-P	2000	M20X2.50	3/4	1	1 1/2	5	4	3/16	-	-
IL92-M24GX4-P	IL92-M24SX4-P	2000	M24X3.00	1	1 1/4	1 1/2	5 1/4	4	7/16	-	-
IL94-M8GX4-P	IL94-M8SX4-P	500	M8X1.25	1/2	1	2 3/8	5	4	3/16	-	-
IL94-M10GX4-P	IL94-M10SX4-P	2500	M10X1.50	1/2	1	2 3/8	5	4	3/16	-	-
IL94-M12GX4-P	IL94-M12SX4-P	2500	M12X1.75	5/8	1	2 3/8	5	4	3/16	-	-
IL94-M16GX4-P	IL94-M16SX4-P	2500	M16X2.00	3/4	1	2 3/8	5	4	3/16	-	-
IL94-M20GX4-P	IL94-M20SX4-P	2500	M20X2.50	3/4	1	2 3/8	5	4	3/16	-	-
IL94-M24GX4-P	IL94-M24SX4-P	2500	M24X3.00	1	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL96-M8GX4-H-P	IL96-M8SX4-H-P	500	M8X1.25	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-M10GX4-H-P	IL96-M10SX4-H-P	3000	M10X1.50	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-M12GX4-H-P	IL96-M12SX4-H-P	3000	M12X1.75	5/8	1	3 1/8	5	4	3/16	.39	2.2
IL96-M16GX4-H-P	IL96-M16SX4-H-P	3000	M16X2.00	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-M20GX4-H-P	IL96-M20SX4-H-P	3000	M20X2.50	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-M24GX4-H-P	IL96-M24SX4-H-P	3000	M24X3.00	1	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 4" STUD

**NYLON METRIC SWIVEL STUD STYLE
LEVELERS – with Rubber Pad**





The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

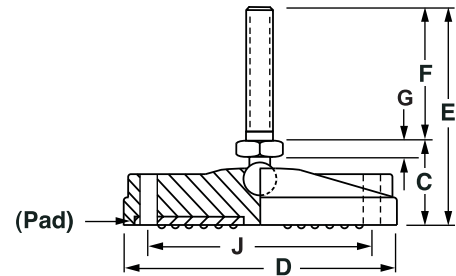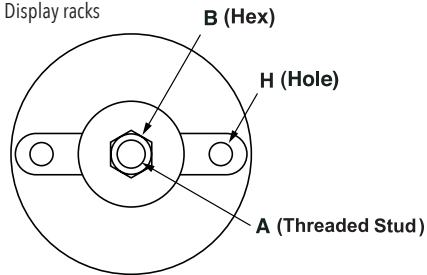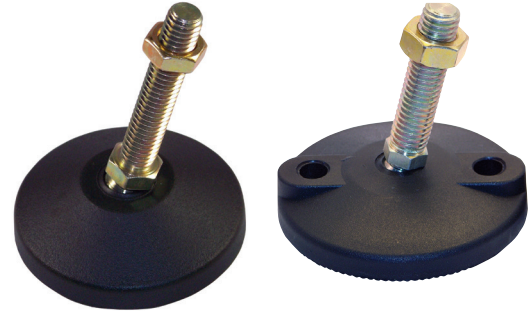**Metric Threads: 4", 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL98-M8GX4-H-P	IL98-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M10GX4-H-P	IL98-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M12GX4-H-P	IL98-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M16GX4-H-P	IL98-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M20GX4-H-P	IL98-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M24GX4-H-P	IL98-M24SX4-H-P	3000	M24X3.00	1	1 1/2	4	5 1/2	4	7/16	.51	2.9
IL98A-M8GX4-H-P	IL98A-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M10GX4-H-P	IL98A-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M12GX4-H-P	IL98A-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M16GX4-H-P	IL98A-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M20GX4-H-P	IL98A-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M24GX4-H-P	IL98A-M24SX4-H-P	3000	M24X3.00	1	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98B-M8GX4-H-P	IL98B-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M10GX4-H-P	IL98B-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M12GX4-H-P	IL98B-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M16GX4-H-P	IL98B-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M20GX4-H-P	IL98B-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M24GX4-H-P	IL98B-M24SX4-H-P	3000	M24X3.00	1	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98C-M8GX4-H-P	IL98C-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M10GX4-H-P	IL98C-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M12GX4-H-P	IL98C-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M16GX4-H-P	IL98C-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M20GX4-H-P	IL98C-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M24GX4-H-P	IL98C-M24SX4-H-P	3000	M24X3.00	1	1 1/2	10	5 1/2	4	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 5" STUD

NYLON METRIC SWIVEL STUD STYLE**LEVELERS – with Rubber Pad**




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

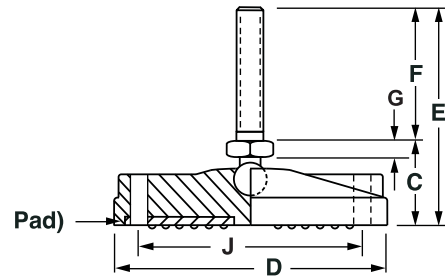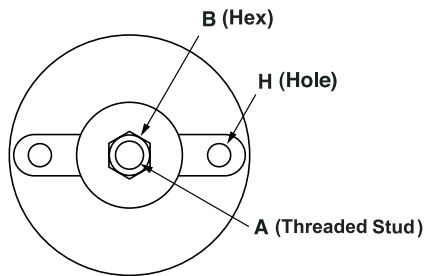**Metric Threads: 1" to 4" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL90-M10GX5-P	IL90-M10SX5-P	2000	M10X1.50	1/2	1	1	6	5	3/16	-	-
IL90-M12GX5-P	IL90-M12SX5-P	2000	M12X1.75	1/2	1	1	6	5	3/16	-	-
IL90-M16GX5-P	IL90-M16SX5-P	2000	M16X2.00	5/8	1	1	6	5	3/16	-	-
IL90-M20GX5-P	IL90-M20SX5-P	2000	M20X2.50	3/4	1	1	6	5	3/16	-	-
IL90-M24GX5-P	IL90-M24SX5-P	2000	M24X3.00	1	1 1/4	1	6 1/4	5	7/16	-	-
IL92-M10GX5-P	IL92-M10SX5-P	2000	M10X1.50	1/2	1	1 1/2	6	5	3/16	-	-
IL92-M12GX5-P	IL92-M12SX5-P	2000	M12X1.75	1/2	1	1 1/2	6	5	3/16	-	-
IL92-M16GX5-P	IL92-M16SX5-P	2000	M16X2.00	5/8	1	1 1/2	6	5	3/16	-	-
IL92-M20GX5-P	IL92-M20SX5-P	2000	M20X2.50	3/4	1	1 1/2	6	5	3/16	-	-
IL92-M24GX5-P	IL92-M24SX5-P	2000	M24X3.00	1	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL94-M10GX5-P	IL94-M10SX5-P	2500	M10X1.50	1/2	1	2 3/8	6	5	3/16	-	-
IL94-M12GX5-P	IL94-M12SX5-P	2500	M12X1.75	1/2	1	2 3/8	6	5	3/16	-	-
IL94-M16GX5-P	IL94-M16SX5-P	2500	M16X2.00	5/8	1	2 3/8	6	5	3/16	-	-
IL94-M20GX5-P	IL94-M20SX5-P	2500	M20X2.50	3/4	1	2 3/8	6	5	3/16	-	-
IL94-M24GX5-P	IL94-M24SX5-P	2500	M24X3.00	1	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL96-M10GX5-H-P	IL96-M10SX5-H-P	3000	M10X1.50	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-M12GX5-H-P	IL96-M12SX5-H-P	3000	M12X1.75	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-M16GX5-H-P	IL96-M16SX5-H-P	3000	M16X2.00	5/8	1	3 1/8	6	5	3/16	.39	2.2
IL96-M20GX5-H-P	IL96-M20SX5-H-P	3000	M20X2.50	3/4	1	3 1/8	6	5	3/16	.39	2.2
IL96-M24GX5-H-P	IL96-M24SX5-H-P	3000	M24X3.00	1	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 5" STUD

NYLON METRIC SWIVEL STUD STYLE

LEVELERS – with Rubber Pad





The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

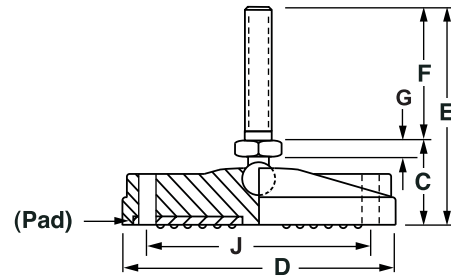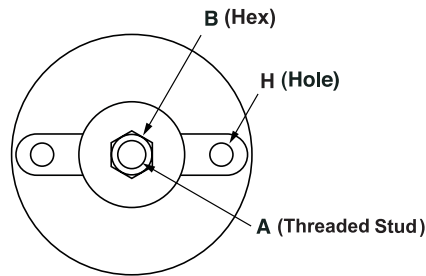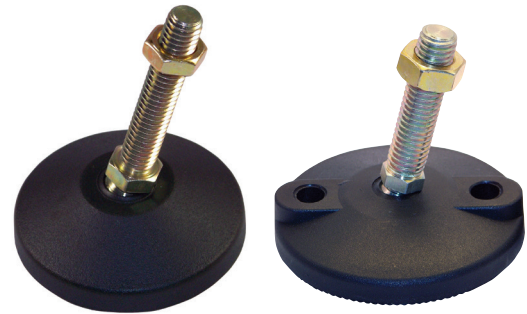

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL98-M10GX5-H-P	IL98-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M12GX5-H-P	IL98-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M16GX5-H-P	IL98-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M20GX5-H-P	IL98-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M24GX5-H-P	IL98-M24SX5-H-P	3000	M24X3.00	1	1 1/2	4	6 1/2	5	7/16	.51	2.9
IL98A-M10GX5-H-P	IL98A-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M12GX5-H-P	IL98A-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M16GX5-H-P	IL98A-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M20GX5-H-P	IL98A-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M24GX5-H-P	IL98A-M24SX5-H-P	3000	M24X3.00	1	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98B-M10GX5-H-P	IL98B-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M12GX5-H-P	IL98B-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M16GX5-H-P	IL98B-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M20GX5-H-P	IL98B-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M24GX5-H-P	IL98B-M24SX5-H-P	3000	M24X3.00	1	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98C-M10GX5-H-P	IL98C-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M12GX5-H-P	IL98C-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M16GX5-H-P	IL98C-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M20GX5-H-P	IL98C-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M24GX5-H-P	IL98C-M24SX5-H-P	3000	M24X3.00	1	1 1/2	10	6 1/2	5	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 6" STUD

NYLON METRIC SWIVEL STUD STYLE

LEVELERS – with Rubber Pad




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

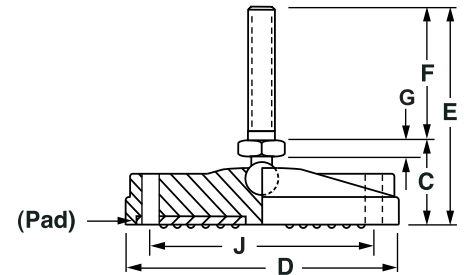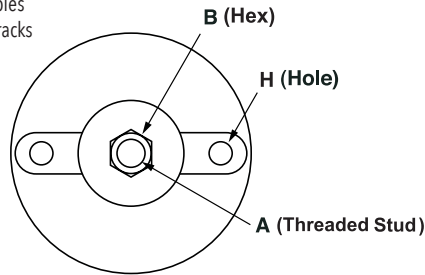

Metric Threads: 1" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL90-M8GX6-P	IL90-M8SX6-P	2000	M8X1.25	1/4	1	1	7	6	3/16	-	-
IL90-M10GX6-P	IL90-M10SX6-P	2000	M10X1.50	1/2	1	1	7	6	3/16	-	-
IL90-M12GX6-P	IL90-M12SX6-P	2000	M12X1.75	1/2	1	1	7	6	3/16	-	-
IL90-M16GX6-P	IL90-M16SX6-P	2000	M16X2.00	5/8	1	1	7	6	3/16	-	-
IL90-M20GX6-P	IL90-M20SX6-P	2000	M20X2.50	3/4	1	1	7	6	3/16	-	-
IL90-M24GX6-P	IL90-M24SX6-P	2000	M24X3.00	1	1 1/4	1	7 1/4	6	7/16	-	-
IL92-M8GX6-P	IL92-M8SX6-P	2000	M8X1.25	1/4	1	1 1/2	7	6	3/16	-	-
IL92-M10GX6-P	IL92-M10SX6-P	2000	M10X1.50	1/2	1	1 1/2	7	6	3/16	-	-
IL92-M12GX6-P	IL92-M12SX6-P	2000	M12X1.75	1/2	1	1 1/2	7	6	3/16	-	-
IL92-M16GX6-P	IL92-M16SX6-P	2000	M16X2.00	5/8	1	1 1/2	7	6	3/16	-	-
IL92-M20GX6-P	IL92-M20SX6-P	2000	M20X2.50	3/4	1	1 1/2	7	6	3/16	-	-
IL92-M24GX6-P	IL92-M24SX6-P	2000	M24X3.00	1	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL94-M8GX6-P	IL94-M8SX6-P	2500	M8X1.25	1/4	1	2 3/8	7	6	3/16	-	-
IL94-M10GX6-P	IL94-M10SX6-P	2500	M10X1.50	1/2	1	2 3/8	7	6	3/16	-	-
IL94-M12GX6-P	IL94-M12SX6-P	2500	M12X1.75	1/2	1	2 3/8	7	6	3/16	-	-
IL94-M16GX6-P	IL94-M16SX6-P	2500	M16X2.00	5/8	1	2 3/8	7	6	3/16	-	-
IL94-M20GX6-P	IL94-M20SX6-P	2500	M20X2.50	3/4	1	2 3/8	7	6	3/16	-	-
IL94-M24GX6-P	IL94-M24SX6-P	2500	M24X3.00	1	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL96-M8GX6-H-P	IL96-M8SX6-H-P	3000	M8X1.25	1/4	1	3 1/8	7	6	3/16	.39	2.2
IL96-M10GX6-H-P	IL96-M10SX6-H-P	3000	M10X1.50	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-M12GX6-H-P	IL96-M12SX6-H-P	3000	M12X1.75	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-M16GX6-H-P	IL96-M16SX6-H-P	3000	M16X2.00	5/8	1	3 1/8	7	6	3/16	.39	2.2
IL96-M20GX6-H-P	IL96-M20SX6-H-P	3000	M20X2.50	3/4	1	3 1/8	7	6	3/16	.39	2.2
IL96-M24GX6-H-P	IL96-M24SX6-H-P	3000	M24X3.00	1	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 6" STUD

NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

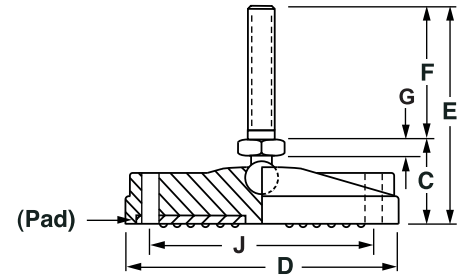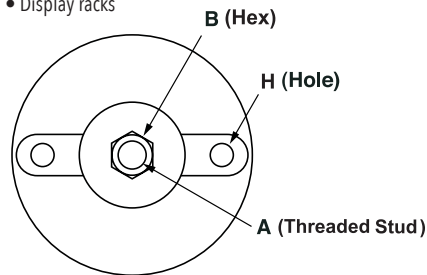

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL98-M8GX6-H-P	IL98-M8SX6-H-P	3000	M8X1.25	1/4	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M10GX6-H-P	IL98-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M12GX6-H-P	IL98-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M16GX6-H-P	IL98-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M20GX6-H-P	IL98-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M24GX6-H-P	IL98-M24SX6-H-P	3000	M24X3.00	1	1 1/2	4	7 1/2	6	7/16	.51	2.9
IL98A-M8GX6-H-P	IL98A-M8SX6-H-P	3000	M8X1.25	1/4	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M10GX6-H-P	IL98A-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M12GX6-H-P	IL98A-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M16GX6-H-P	IL98A-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M20GX6-H-P	IL98A-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M24GX6-H-P	IL98A-M24SX6-H-P	3000	M24X3.00	1	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98B-M8GX6-H-P	IL98B-M8SX6-H-P	3000	M8X1.25	1/4	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M10GX6-H-P	IL98B-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M12GX6-H-P	IL98B-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M16GX6-H-P	IL98B-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M20GX6-H-P	IL98B-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M24GX6-H-P	IL98B-M24SX6-H-P	3000	M24X3.00	1	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98C-M8GX6-H-P	IL98C-M8SX6-H-P	3000	M8X1.25	1/4	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M10GX6-H-P	IL98C-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M12GX6-H-P	IL98C-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M16GX6-H-P	IL98C-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M20GX6-H-P	IL98C-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M24GX6-H-P	IL98C-M24SX6-H-P	3000	M24X3.00	1	1 1/2	10	7 1/2	6	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 8" STUD

NYLON METRIC SWIVEL STUD STYLE

LEVELERS – with Rubber Pad





The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

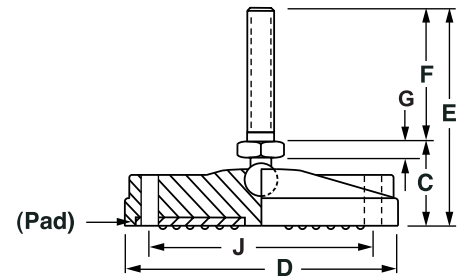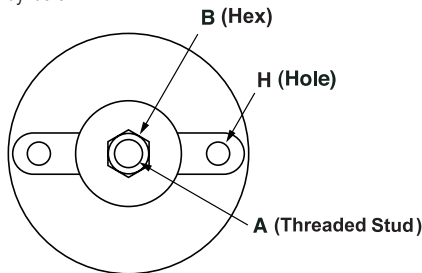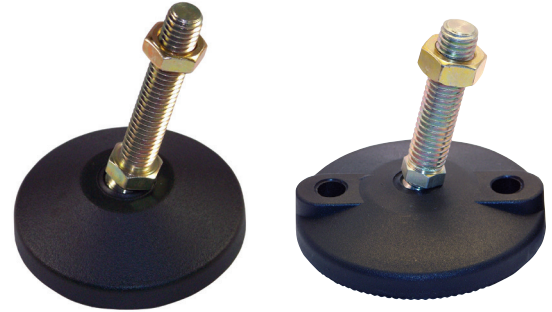

Metric Threads: 1" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—8" Stud and Rubber Pad											
IL90-M12GX8-P	IL90-M12SX8-P	2000	M12X1.75	1/2	1	1	9	8	3/16	-	-
IL90-M16GX8-P	IL90-M16SX8-P	2000	M16X2.00	5/8	1	1	9	8	3/16	-	-
IL90-M20GX8-P	IL90-M20SX8-P	2000	M20X2.50	3/4	1	1	9	8	3/16	-	-
IL90-M24GX8-P	IL90-M24SX8-P	2000	M24X3.00	1	1 1/4	1	9 1/4	8	7/16	-	-
IL92-M12GX8-P	IL92-M12SX8-P	2000	M12X1.75	1/2	1	1 1/2	9	8	3/16	-	-
IL92-M16GX8-P	IL92-M16SX8-P	2000	M16X2.00	5/8	1	1 1/2	9	8	3/16	-	-
IL92-M20GX8-P	IL92-M20SX8-P	2000	M20X2.50	3/4	1	1 1/2	9	8	3/16	-	-
IL92-M24GX8-P	IL92-M24SX8-P	2000	M24X3.00	1	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL94-M12GX8-P	IL94-M12SX8-P	2500	M12X1.75	1/2	1	2 3/8	9	8	3/16	-	-
IL94-M16GX8-P	IL94-M16SX8-P	2500	M16X2.00	5/8	1	2 3/8	9	8	3/16	-	-
IL94-M20GX8-P	IL94-M20SX8-P	2500	M20X2.50	3/4	1	2 3/8	9	8	3/16	-	-
IL94-M24GX8-P	IL94-M24SX8-P	2500	M24X3.00	1	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL96-M12GX8-H-P	IL96-M12SX8-H-P	3000	M12X1.75	1/2	1	3 1/8	9	8	3/16	.39	2.2
IL96-M16GX8-H-P	IL96-M16SX8-H-P	3000	M16X2.00	5/8	1	3 1/8	9	8	3/16	.39	2.2
IL96-M20GX8-H-P	IL96-M20SX8-H-P	3000	M20X2.50	3/4	1	3 1/8	9	8	3/16	.39	2.2
IL96-M24GX8-H-P	IL96-M24SX8-H-P	3000	M24X3.00	1	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 8" STUD

**NYLON METRIC SWIVEL STUD STYLE
LEVELERS – with Rubber Pad**




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

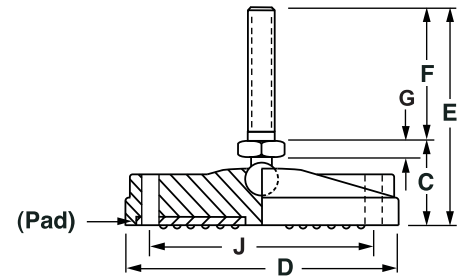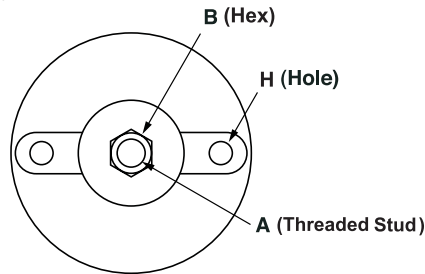**Metric Threads: 4", 6", 8" & 10" Base Diameters**

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-8" Stud and Rubber Pad											
IL98-M12GX8-H-P	IL98-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M16GX8-H-P	IL98-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M20GX8-H-P	IL98-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M24GX8-H-P	IL98-M24SX8-H-P	3000	M24X3.00	1	1 1/2	4	9 1/2	8	7/16	.51	2.9
IL98A-M12GX8-H-P	IL98A-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M16GX8-H-P	IL98A-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M20GX8-H-P	IL98A-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M24GX8-H-P	IL98A-M24SX8-H-P	3000	M24X3.00	1	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98B-M12GX8-H-P	IL98B-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M16GX8-H-P	IL98B-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M20GX8-H-P	IL98B-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M24GX8-H-P	IL98B-M24SX8-H-P	3000	M24X3.00	1	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98C-M12GX8-H-P	IL98C-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M16GX8-H-P	IL98C-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M20GX8-H-P	IL98C-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M24GX8-H-P	IL98C-M24SX8-H-P	3000	M24X3.00	1	1 1/2	10	9 1/2	8	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, **SAUCER BASE®** Fixed Stud Levelers


The IEC *Saucer Base® Fixed Stud Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a **bottom hex drive molded into the base**. Steel stud and washer have **clear zinc plating**.

Features

- Loads to 3000 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



LOW PROFILE FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL120-4Bx1/2	IL120-4BSx1/2	100	1/4-20	1/2	3/4	1/2	11/16
IL120-4Bx1	IL120-4BSx1	100	1/4-20	1/2	3/4	1	11/16
IL120-4B	IL120-4BS	100	1/4-20	1/2	3/4	1-9/16	11/16
IL120-4Bx2-HX	IL120-4BSx2-HX	100	1/4-20	1/2	3/4	2	11/16
IL120-4Bx25	IL120-4BSx25	100	1/4-20	1/2	3/4	2-1/2	11/16
IL120-5Bx3/4	IL120-5BSx3/4	500	5/16-18	1/2	3/4	3/4	11/16
IL120-5Bx15-HX	IL120-5BSx15-HX	500	5/16-18	1/2	3/4	1-1/2	11/16
IL120-5B	IL120-5BS	500	5/16-18	1/2	3/4	1-9/16	11/16
IL120-5Bx25-HX	IL120-5BSx25-HX	500	5/16-18	1/2	3/4	2-1/2	11/16
IL120-5Bx3	IL120-5BSx3	500	5/16-18	1/2	3/4	3	11/16
IL120-5Bx4	IL120-5BSx4	500	5/16-18	1/2	3/4	4	11/16
IL120-6Bx3/4	IL120-6BSx3/4	1000	3/8-16	1/2	3/4	3/4	11/16
IL120-6Bx15-HX	IL120-6BSx15-HX	1000	3/8-16	1/2	3/4	1-1/2	11/16
IL120-6B	IL120-6BS	1000	3/8-16	1/2	3/4	1-9/16	11/16
IL120-6Bx1	IL120-6BSx1	1000	3/8-16	1/2	3/4	1	11/16
IL120-6Bx2	IL120-6BSx2	1000	3/8-16	1/2	3/4	2	11/16
IL120-6Bx2-HX	IL120-6BSx2-HX	1000	3/8-16	1/2	3/4	2	11/16
IL120-6Bx3	IL120-6BSx3	1000	3/8-16	1/2	3/4	3	11/16
IL120-6Bx3-HX	IL120-6BSx3-HX	1000	3/8-16	1/2	3/4	3	11/16
IL120-6Bx4	IL120-6BSx4	1000	3/8-16	1/2	3/4	4	11/16
IL120-6Bx45-HX	IL120-6BSx45-HX	1000	3/8-16	1/2	3/4	4-1/2	11/16
IL120-6Bx6-HX	IL120-6BSx6-HX	1000	3/8-16	1/2	3/4	6	11/16
IL120-6FBx1	IL120-6FBSx1	1000	3/8-24	1/2	3/4	1	11/16
IL120-6FBx2	IL120-6FBSx2	1000	3/8-24	1/2	3/4	2	11/16
IL120-7B	IL120-7BS	2000	1/2-13	1/2	3/4	1-9/16	11/16
IL120-7Bx2	IL120-7BSx2	2000	1/2-13	1/2	3/4	2	11/16
IL120-7Bx2-HX	IL120-7BSx2-HX	2000	1/2-13	1/2	3/4	2	11/16
IL120-7Bx25-HX	IL120-7BSx25-HX	2000	1/2-13	1/2	3/4	2-1/2	11/16
IL120-7Bx3	IL120-7BSx3	2000	1/2-13	1/2	3/4	3	11/16
IL120-7Bx3-HX	IL120-7BSx3-HX	2000	1/2-13	1/2	3/4	3	11/16
IL120-7Bx35-HX	IL120-7BSx35-HX	2000	1/2-13	1/2	3/4	3-1/2	11/16
IL120-7Bx4	IL120-7BSx4	2000	1/2-13	1/2	3/4	4	11/16
IL120-7Bx4-HX	IL120-7BSx4-HX	2000	1/2-13	1/2	3/4	4	11/16
IL120-7Bx5	IL120-7BSx5	2000	1/2-13	1/2	3/4	5	11/16
IL120-7Bx5-HX	IL120-7BSx5-HX	2000	1/2-13	1/2	3/4	5	11/16
IL120-7Bx6-HX	IL120-7BSx6-HX	1500	1/2-13	1/2	3/4	6	11/16
IL120-7Bx8-HX	IL120-7BSx8-HX	1000	1/2-13	1/2	3/4	8	11/16
IL120-7FBx1	IL120-7FBSx1	2000	1/2-20	1/2	3/4	1	11/16
IL120-7FBx2	IL120-7FBSx2	2000	1/2-20	1/2	3/4	2	11/16
IL120-7FBx4	IL120-7FBSx4	2000	1/2-20	1/2	3/4	4	11/16
IL120-8B	IL120-8BS	2500	5/8-11	5/8	3/4	1-9/16	11/16
IL120-8Bx3	IL120-8BSx3	2500	5/8-11	5/8	3/4	3	11/16
IL120-8Bx4	IL120-8BSx4	2500	5/8-11	5/8	3/4	4	11/16
IL120-8Bx5	IL120-8BSx5	2500	5/8-11	5/8	3/4	5	11/16
IL120-9B	IL120-9BS	3000	3/4-10	3/4	3/4	1-9/16	11/16
IL120-9Bx3	IL120-9BSx3	3000	3/4-10	3/4	3/4	3	11/16
IL120-9Bx4	IL120-9BSx4	3000	3/4-10	3/4	3/4	4	11/16
IL121-4Bx1/2	IL121-4BSx1/2	100	1/4-20	1/2	1	1/2	11/16
IL121-4Bx1	IL121-4BSx1	100	1/4-20	1/2	1	1	11/16
IL121-4B	IL121-4BS	100	1/4-20	1/2	1	1-9/16	11/16
IL121-4Bx2-HX	IL121-4BSx2-HX	100	1/4-20	1/2	1	2	11/16
IL121-4Bx25	IL121-4BSx25	100	1/4-20	1/2	1	2-1/2	11/16
IL121-5Bx3/4	IL121-5BSx15-3/4	500	5/16-18	1/2	1	3/4	11/16
IL121-5Bx15-HX	IL121-5BSx15-HX	500	5/16-18	1/2	1	1-1/2	11/16
IL121-5B	IL121-5BS	500	5/16-18	1/2	1	1-9/16	11/16
IL121-5Bx25-HX	IL121-5BSx25-HX	500	5/16-18	1/2	1	2-1/2	11/16
IL121-5Bx3	IL121-5BSx3	500	5/16-18	1/2	1	3	11/16
IL121-5Bx4	IL121-5BSx4	500	5/16-18	1/2	1	4	11/16
IL121-6Bx3/4	IL121-6BSx3/4	1000	3/8-16	1/2	1	3/4	11/16
IL121-6Bx15-HX	IL121-6BSx15-HX	1000	3/8-16	1/2	1	1-1/2	11/16
IL121-6B	IL121-6BS	1000	3/8-16	1/2	1	1-9/16	11/16
IL121-6Bx1	IL121-6BSx1	1000	3/8-16	1/2	1	1	11/16
IL121-6Bx2	IL121-6BSx2	1000	3/8-16	1/2	1	2	11/16
IL121-6Bx2-HX	IL121-6BSx2-HX	1000	3/8-16	1/2	1	2	11/16
IL121-6Bx3	IL121-6BSx3	1000	3/8-16	1/2	1	3	11/16
IL121-6Bx3-HX	IL121-6BSx3-HX	1000	3/8-16	1/2	1	3	11/16
IL121-6Bx4	IL121-6BSx4	1000	3/8-16	1/2	1	4	11/16
IL121-6Bx45-HX	IL121-6BSx45-HX	1000	3/8-16	1/2	1	4-1/2	11/16
IL121-6Bx6-HX	IL121-6BSx6-HX	1000	3/8-16	1/2	1	6	11/16
IL121-6FBx1	IL121-6FBSx1	1000	3/8-24	1/2	1	1	11/16
IL121-6FBx2	IL121-6FBSx2	1000	3/8-24	1/2	1	2	11/16
IL121-7B	IL121-7BS	2000	1/2-13	1/2	1	1-9/16	11/16
IL121-7Bx2	IL121-7BSx2	2000	1/2-13	1/2	1	2	11/16
IL121-7Bx2-HX	IL121-7BSx2-HX	2000	1/2-13	1/2	1	2	11/16
IL121-7Bx25-HX	IL121-7BSx25-HX	2000	1/2-13	1/2	1	2-1/2	11/16
IL121-7Bx3	IL121-7BSx3	2000	1/2-13	1/2	1	3	11/16
IL121-7Bx3-HX	IL121-7BSx3-HX	2000	1/2-13	1/2	1	3	11/16
IL121-7Bx35-HX	IL121-7BSx35-HX	2000	1/2-13	1/2	1	3-1/2	11/16
IL121-7Bx4	IL121-7BSx4	2000	1/2-13	1/2	1	4	11/16
IL121-7Bx4-HX	IL121-7BSx4-HX	2000	1/2-13	1/2	1	4	11/16
IL121-7Bx5	IL121-7BSx5	2000	1/2-13	1/2	1	5	11/16
IL121-7Bx5-HX	IL121-7BSx5-HX	2000	1/2-13	1/2	1	5	11/16
IL121-7Bx6-HX	IL121-7BSx6-HX	1500	1/2-13	1/2	1	6	11/16
IL121-7Bx8-HX	IL121-7BSx8-HX	1000	1/2-13	1/2	1	8	11/16



Medium Duty Low-Profile, **SAUCER BASE®** Fixed Stud Levelers


The IEC *Saucer Base® Fixed Stud Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a bottom hex drive molded into the base. Steel stud and washer have clear zinc plating.

Features

- Loads to 3000 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



LOW PROFILE FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL122-4Bx1/2	IL122-4BSx1/2	100	1/4-20	1/2	1-1/4	1/2	11/16
IL122-4Bx1	IL122-4BSx1	100	1/4-20	1/2	1-1/4	1	11/16
IL122-4B	IL122-4BS	100	1/4-20	1/2	1-1/4	1-9/16	11/16
IL122-4Bx2-HX	IL122-4BSx2-HX	100	1/4-20	1/2	1-1/4	2	11/16
IL122-4Bx25	IL122-4BSx25	100	1/4-20	1/2	1-1/4	2-1/2	11/16
IL122-5Bx3/4	IL122-5BSx3/4	500	5/16-18	1/2	1-1/4	3/4	11/16
IL122-5Bx15-HX	IL122-5BSx15-HX	500	5/16-18	1/2	1-1/4	1-1/2	11/16
IL122-5B	IL122-5BS	500	5/16-18	1/2	1-1/4	1-9/16	11/16
IL122-5Bx25-HX	IL122-5BSx25-HX	500	5/16-18	1/2	1-1/4	2-1/2	11/16
IL122-5Bx3	IL122-5BSx3	500	5/16-18	1/2	1-1/4	3	11/16
IL122-5Bx4	IL122-5BSx4	500	5/16-18	1/2	1-1/4	4	11/16
IL122-6Bx3/4	IL122-6BSx3/4	1000	3/8-16	1/2	1-1/4	3/4	11/16
IL122-6Bx15-HX	IL122-6BSx15-HX	1000	3/8-16	1/2	1-1/4	1-1/2	11/16
IL122-6B	IL122-6BS	1000	3/8-16	1/2	1-1/4	1-9/16	11/16
IL122-6Bx1	IL122-6BSx1	1000	3/8-16	1/2	1-1/4	1	11/16
IL122-6Bx2	IL122-6BSx2	1000	3/8-16	1/2	1-1/4	2	11/16
IL122-6Bx2-HX	IL122-6BSx2-HX	1000	3/8-16	1/2	1-1/4	2	11/16
IL122-6Bx3	IL122-6BSx3	1000	3/8-16	1/2	1-1/4	3	11/16
IL122-6Bx3-HX	IL122-6BSx3-HX	1000	3/8-16	1/2	1-1/4	3	11/16
IL122-6Bx4	IL122-6BSx4	1000	3/8-16	1/2	1-1/4	4	11/16
IL122-6Bx45-HX	IL122-6BSx45-HX	1000	3/8-16	1/2	1-1/4	4-1/2	11/16
IL122-6Bx6-HX	IL122-6BSx6-HX	1000	3/8-16	1/2	1-1/4	6	11/16
IL122-6FBx1	IL122-6FBSx1	1000	3/8-24	1/2	1-1/4	1	11/16
IL122-6FBx2	IL122-6FBSx2	1000	3/8-24	1/2	1-1/4	2	11/16
IL122-7B	IL122-7BS	2000	1/2-13	1/2	1-1/4	1-9/16	11/16
IL122-7Bx2	IL122-7BSx2	2000	1/2-13	1/2	1-1/4	2	11/16
IL122-7Bx2-HX	IL122-7BSx2-HX	2000	1/2-13	1/2	1-1/4	2	11/16
IL122-7Bx25-HX	IL122-7BSx25-HX	2000	1/2-13	1/2	1-1/4	2-1/2	11/16
IL122-7Bx3	IL122-7BSx3	2000	1/2-13	1/2	1-1/4	3	11/16
IL122-7Bx3-HX	IL122-7BSx3-HX	2000	1/2-13	1/2	1-1/4	3	11/16
IL122-7Bx35-HX	IL122-7BSx35-HX	2000	1/2-13	1/2	1-1/4	3-1/2	11/16
IL122-7Bx4	IL122-7BSx4	2000	1/2-13	1/2	1-1/4	4	11/16
IL122-7Bx4-HX	IL122-7BSx4-HX	2000	1/2-13	1/2	1-1/4	4	11/16
IL122-7Bx5	IL122-7BSx5	2000	1/2-13	1/2	1-1/4	5	11/16
IL122-7Bx5-HX	IL122-7BSx5-HX	2000	1/2-13	1/2	1-1/4	5	11/16
IL122-7Bx6-HX	IL122-7BSx6-HX	1500	1/2-13	1/2	1-1/4	6	11/16
IL122-7Bx8-HX	IL122-7BSx8-HX	1000	1/2-13	1/2	1-1/4	8	11/16
IL122-7FBx1	IL122-7FBSx1	2000	1/2-20	1/2	1-1/4	1	11/16
IL122-7FBx2	IL122-7FBSx2	2000	1/2-20	1/2	1-1/4	2	11/16
IL122-7FBx4	IL122-7FBSx4	2000	1/2-20	1/2	1-1/4	4	11/16
IL122-8B	IL122-8BS	2500	5/8-11	5/8	1-1/4	1-9/16	11/16
IL122-8Bx3	IL122-8BSx3	2500	5/8-11	5/8	1-1/4	3	11/16
IL122-8Bx4	IL122-8BSx4	2500	5/8-11	5/8	1-1/4	4	11/16
IL122-8Bx5	IL122-8BSx5	2500	5/8-11	5/8	1-1/4	5	11/16
IL122-9B	IL122-9BS	3000	3/4-10	3/4	1-1/4	1-9/16	11/16
IL122-9Bx3	IL122-9BSx3	3000	3/4-10	3/4	1-1/4	3	11/16
IL122-9Bx4	IL122-9BSx4	3000	3/4-10	3/4	1-1/4	4	11/16
IL123-4Bx1/2	IL123-4BSx1/2	100	1/4-20	1/2	1-1/2	1/2	11/16
IL123-4Bx1	IL123-4BSx1	100	1/4-20	1/2	1-1/2	1	11/16
IL123-4B	IL123-4BS	100	1/4-20	1/2	1-1/2	1-9/16	11/16
IL123-4Bx2-HX	IL123-4BSx2-HX	100	1/4-20	1/2	1-1/2	2	11/16
IL123-4Bx25	IL123-4BSx25	100	1/4-20	1/2	1-1/2	2-1/2	11/16
IL123-5Bx3/4	IL123-5BSx15-3/4	500	5/16-18	1/2	1-1/2	3/4	11/16
IL123-5Bx15-HX	IL123-5BSx15-HX	500	5/16-18	1/2	1-1/2	1-1/2	11/16
IL123-5B	IL123-5BS	500	5/16-18	1/2	1-1/2	1-9/16	11/16
IL123-5Bx25-HX	IL123-5BSx25-HX	500	5/16-18	1/2	1-1/2	2-1/2	11/16
IL123-5Bx3	IL123-5BSx3	500	5/16-18	1/2	1-1/2	3	11/16
IL123-5Bx4	IL123-5BSx4	500	5/16-18	1/2	1-1/2	4	11/16
IL123-6Bx3/4	IL123-6BSx3/4	1000	3/8-16	1/2	1-1/2	3/4	11/16
IL123-6Bx15-HX	IL123-6BSx15-HX	1000	3/8-16	1/2	1-1/2	1-1/2	11/16
IL123-6B	IL123-6BS	1000	3/8-16	1/2	1-1/2	1-9/16	11/16
IL123-6Bx1	IL123-6BSx1	1000	3/8-16	1/2	1-1/2	1	11/16
IL123-6Bx2	IL123-6BSx2	1000	3/8-16	1/2	1-1/2	2	11/16
IL123-6Bx2-HX	IL123-6BSx2-HX	1000	3/8-16	1/2	1-1/2	2	11/16
IL123-6Bx3	IL123-6BSx3	1000	3/8-16	1/2	1-1/2	3	11/16
IL123-6Bx3-HX	IL123-6BSx3-HX	1000	3/8-16	1/2	1-1/2	3	11/16
IL123-6Bx4	IL123-6BSx4	1000	3/8-16	1/2	1-1/2	4	11/16
IL123-6Bx45-HX	IL123-6BSx45-HX	1000	3/8-16	1/2	1-1/2	4-1/2	11/16
IL123-6Bx6-HX	IL123-6BSx6-HX	1000	3/8-16	1/2	1-1/2	6	11/16
IL123-6FBx1	IL123-6FBSx1	1000	3/8-24	1/2	1-1/2	1	11/16
IL123-6FBx2	IL123-6FBSx2	1000	3/8-24	1/2	1-1/2	2	11/16
IL123-7B	IL123-7BS	2000	1/2-13	1/2	1-1/2	1-9/16	11/16
IL123-7Bx2	IL123-7BSx2	2000	1/2-13	1/2	1-1/2	2	11/16
IL123-7Bx2-HX	IL123-7BSx2-HX	2000	1/2-13	1/2	1-1/2	2	11/16
IL123-7Bx25-HX	IL123-7BSx25-HX	2000	1/2-13	1/2	1-1/2	2-1/2	11/16
IL123-7Bx3	IL123-7BSx3	2000	1/2-13	1/2	1-1/2	3	11/16
IL123-7Bx3-HX	IL123-7BSx3-HX	2000	1/2-13	1/2	1-1/2	3	11/16
IL123-7Bx35-HX	IL123-7BSx35-HX	2000	1/2-13	1/2	1-1/2	3-1/2	11/16
IL123-7Bx4	IL123-7BSx4	2000	1/2-13	1/2	1-1/2	4	11/16
IL123-7Bx4-HX	IL123-7BSx4-HX	2000	1/2-13	1/2	1-1/2	4	11/16
IL123-7Bx5	IL123-7BSx5	2000	1/2-13	1/2	1-1/2	5	11/16
IL123-7Bx5-HX	IL123-7BSx5-HX	2000	1/2-13	1/2	1-1/2	5	11/16
IL123-7Bx6-HX	IL123-7BSx6-HX	1500	1/2-13	1/2	1-1/2	6	11/16
IL123-7Bx8-HX	IL123-7BSx8-HX	1000	1/2-13	1/2	1-1/2	8	11/16



Medium Duty Low-Profile, **SAUCER BASE®** Fixed Stud Levelers


The IEC *Saucer Base® Fixed Stud Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a bottom hex drive molded into the base. Steel stud and washer have clear zinc plating.

Features

- Loads to 3000 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL124-4Bx1/2	IL124-4BSx1/2	100	1/4-20	1/2	1-3/4	1/2	11/16
IL124-4Bx1	IL124-4BSx1	100	1/4-20	1/2	1-3/4	1	11/16
IL124-4B	IL124-4BS	100	1/4-20	1/2	1-3/4	1-9/16	11/16
IL124-4Bx2-HX	IL124-4BSx2-HX	100	1/4-20	1/2	1-3/4	2	11/16
IL124-4Bx25	IL124-4BSx25	100	1/4-20	1/2	1-3/4	2-1/2	11/16
IL124-5Bx3/4	IL124-5BSx3/4	500	5/16-18	1/2	1-3/4	3/4	11/16
IL124-5Bx15-HX	IL124-5BSx15-HX	500	5/16-18	1/2	1-3/4	1-1/2	11/16
IL124-5B	IL124-5BS	500	5/16-18	1/2	1-3/4	1-9/16	11/16
IL124-5Bx25-HX	IL124-5BSx25-HX	500	5/16-18	1/2	1-3/4	2-1/2	11/16
IL124-5Bx3	IL124-5BSx3	500	5/16-18	1/2	1-3/4	3	11/16
IL124-5Bx4	IL124-5BSx4	500	5/16-18	1/2	1-3/4	4	11/16
IL124-6Bx3/4	IL124-6BSx3/4	1000	3/8-16	1/2	1-3/4	3/4	11/16
IL124-6Bx15-HX	IL124-6BSx15-HX	1000	3/8-16	1/2	1-3/4	1-1/2	11/16
IL124-6B	IL124-6BS	1000	3/8-16	1/2	1-3/4	1-9/16	11/16
IL124-6Bx1	IL124-6BSx1	1000	3/8-16	1/2	1-3/4	1	11/16
IL124-6Bx2	IL124-6BSx2	1000	3/8-16	1/2	1-3/4	2	11/16
IL124-6Bx2-HX	IL124-6BSx2-HX	1000	3/8-16	1/2	1-3/4	2	11/16
IL124-6Bx3	IL124-6BSx3	1000	3/8-16	1/2	1-3/4	3	11/16
IL124-6Bx3-HX	IL124-6BSx3-HX	1000	3/8-16	1/2	1-3/4	3	11/16
IL124-6Bx4	IL124-6BSx4	1000	3/8-16	1/2	1-3/4	4	11/16
IL124-6Bx45-HX	IL124-6BSx45-HX	1000	3/8-16	1/2	1-3/4	4-1/2	11/16
IL124-6Bx6-HX	IL124-6BSx6-HX	1000	3/8-16	1/2	1-3/4	6	11/16
IL124-6FBx1	IL124-6FBSx1	1000	3/8-24	1/2	1-3/4	1	11/16
IL124-6FBx2	IL124-6FBSx2	1000	3/8-24	1/2	1-3/4	2	11/16
IL124-7B	IL124-7BS	2000	1/2-13	1/2	1-3/4	1-9/16	11/16
IL124-7Bx2	IL124-7BSx2	2000	1/2-13	1/2	1-3/4	2	11/16
IL124-7Bx2-HX	IL124-7BSx2-HX	2000	1/2-13	1/2	1-3/4	2	11/16
IL124-7Bx25-HX	IL124-7BSx25-HX	2000	1/2-13	1/2	1-3/4	2-1/2	11/16
IL124-7Bx3	IL124-7BSx3	2000	1/2-13	1/2	1-3/4	3	11/16
IL124-7Bx3-HX	IL124-7BSx3-HX	2000	1/2-13	1/2	1-3/4	3	11/16
IL124-7Bx35-HX	IL124-7BSx35-HX	2000	1/2-13	1/2	1-3/4	3-1/2	11/16
IL124-7Bx4	IL124-7BSx4	2000	1/2-13	1/2	1-3/4	4	11/16
IL124-7Bx4-HX	IL124-7BSx4-HX	2000	1/2-13	1/2	1-3/4	4	11/16
IL124-7Bx5	IL124-7BSx5	2000	1/2-13	1/2	1-3/4	5	11/16
IL124-7Bx5-HX	IL124-7BSx5-HX	2000	1/2-13	1/2	1-3/4	5	11/16
IL124-7Bx6-HX	IL124-7BSx6-HX	1500	1/2-13	1/2	1-3/4	6	11/16
IL124-7Bx8-HX	IL124-7BSx8-HX	1000	1/2-13	1/2	1-3/4	8	11/16
IL124-7FBx1	IL124-7FBSx1	2000	1/2-20	1/2	1-3/4	1	11/16
IL124-7FBx2	IL124-7FBSx2	2000	1/2-20	1/2	1-3/4	2	11/16
IL124-7FBx4	IL124-7FBSx4	2000	1/2-20	1/2	1-3/4	4	11/16
IL124-8B	IL124-8BS	2500	5/8-11	5/8	1-3/4	1-9/16	11/16
IL124-8Bx3	IL124-8BSx3	2500	5/8-11	5/8	1-3/4	3	11/16
IL124-8Bx4	IL124-8BSx4	2500	5/8-11	5/8	1-3/4	4	11/16
IL124-8Bx5	IL124-8BSx5	2500	5/8-11	5/8	1-3/4	5	11/16
IL124-9B	IL124-9BS	3000	3/4-10	3/4	1-3/4	1-9/16	11/16
IL124-9Bx3	IL124-9BSx3	3000	3/4-10	3/4	1-3/4	3	11/16
IL124-9Bx4	IL124-9BSx4	3000	3/4-10	3/4	1-3/4	4	11/16
IL125-4Bx1/2	IL125-4BSx1/2	100	1/4-20	1/2	2	1/2	11/16
IL125-4Bx1	IL125-4BSx1	100	1/4-20	1/2	2	1	11/16
IL125-4B	IL125-4BS	100	1/4-20	1/2	2	1-9/16	11/16
IL125-4Bx2-HX	IL125-4BSx2-HX	100	1/4-20	1/2	2	2	11/16
IL125-4Bx25	IL125-4BSx25	100	1/4-20	1/2	2	2-1/2	11/16
IL125-5Bx3/4	IL125-5BSx3/4	100	1/4-20	1/2	2	3/4	11/16
IL125-5Bx3	IL125-5BSx3	500	5/16-18	1/2	2	3/4	11/16
IL125-5Bx15-HX	IL125-5BSx15-HX	500	5/16-18	1/2	2	1-1/2	11/16
IL125-5B	IL125-5BS	500	5/16-18	1/2	2	1-9/16	11/16
IL125-5Bx25-HX	IL125-5BSx25-HX	500	5/16-18	1/2	2	2-1/2	11/16
IL125-5Bx3	IL125-5BSx3	500	5/16-18	1/2	2	3	11/16
IL125-5Bx4	IL125-5BSx4	500	5/16-18	1/2	2	4	11/16
IL125-6Bx3/4	IL125-6BSx3/4	1000	3/8-16	1/2	2	3/4	11/16
IL125-6Bx15-HX	IL125-6BSx15-HX	1000	3/8-16	1/2	2	1-1/2	11/16
IL125-6B	IL125-6BS	1000	3/8-16	1/2	2	1-9/16	11/16
IL125-6Bx1	IL125-6BSx1	1000	3/8-16	1/2	2	1	11/16
IL125-6Bx2	IL125-6BSx2	1000	3/8-16	1/2	2	2	11/16
IL125-6Bx2-HX	IL125-6BSx2-HX	1000	3/8-16	1/2	2	2	11/16
IL125-6Bx3	IL125-6BSx3	1000	3/8-16	1/2	2	3	11/16
IL125-6Bx3-HX	IL125-6BSx3-HX	1000	3/8-16	1/2	2	3	11/16
IL125-6Bx4	IL125-6BSx4	1000	3/8-16	1/2	2	4	11/16
IL125-6Bx45-HX	IL125-6BSx45-HX	1000	3/8-16	1/2	2	4-1/2	11/16
IL125-6Bx6-HX	IL125-6BSx6-HX	1000	3/8-16	1/2	2	6	11/16
IL125-6FBx1	IL125-6FBSx1	1000	3/8-24	1/2	2	1	11/16
IL125-6FBx2	IL125-6FBSx2	1000	3/8-24	1/2	2	2	11/16
IL125-7B	IL125-7BS	2000	1/2-13	1/2	2	1-9/16	11/16
IL125-7Bx2	IL125-7BSx2	2000	1/2-13	1/2	2	2	11/16
IL125-7Bx2-HX	IL125-7BSx2-HX	2000	1/2-13	1/2	2	2	11/16
IL125-7Bx25-HX	IL125-7BSx25-HX	2000	1/2-13	1/2	2	2-1/2	11/16
IL125-7Bx3	IL125-7BSx3	2000	1/2-13	1/2	2	3	11/16
IL125-7Bx3-HX	IL125-7BSx3-HX	2000	1/2-13	1/2	2	3	11/16
IL125-7Bx35-HX	IL125-7BSx35-HX	2000	1/2-13	1/2	2	3-1/2	11/16
IL125-7Bx4	IL125-7BSx4	2000	1/2-13	1/2	2	4	11/16
IL125-7Bx4-HX	IL125-7BSx4-HX	2000	1/2-13	1/2	2	4	11/16
IL125-7Bx5	IL125-7BSx5	2000	1/2-13	1/2	2	5	11/16
IL125-7Bx5-HX	IL125-7BSx5-HX	2000	1/2-13	1/2	2	5	11/16
IL125-7Bx6-HX	IL125-7BSx6-HX	1500	1/2-13	1/2	2	6	11/16
IL125-7Bx8-HX	IL125-7BSx8-HX	1000	1/2-13	1/2	2	8	11/16



Medium Duty Low-Profile, **SAUCER BASE®** Fixed Stud Levelers


The IEC *Saucer Base® Fixed Stud Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a bottom hex drive molded into the base. Steel stud and washer have clear zinc plating.

Features

- Loads to 3000 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



LOW PROFILE FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL126-4Bx1/2	IL126-4BSx1/2	100	1/4-20	1/2	3	1/2	11/16
IL126-4Bx1	IL126-4BSx1	100	1/4-20	1/2	3	1	11/16
IL126-4B	IL126-4BS	100	1/4-20	1/2	3	1-9/16	11/16
IL126-4Bx2-HX	IL126-4BSx2-HX	100	1/4-20	1/2	3	2	11/16
IL126-4Bx25	IL126-4BSx25	100	1/4-20	1/2	3	2-1/2	11/16
IL126-5Bx3/4	IL126-5BSx3/4	500	5/16-18	1/2	3	3/4	11/16
IL126-5Bx15-HX	IL126-5BSx15-HX	500	5/16-18	1/2	3	1-1/2	11/16
IL126-5B	IL126-5BS	500	5/16-18	1/2	3	1-9/16	11/16
IL126-5Bx25-HX	IL126-5BSx25-HX	500	5/16-18	1/2	3	2-1/2	11/16
IL126-5Bx3	IL126-5BSx3	500	5/16-18	1/2	3	3	11/16
IL126-5Bx4	IL126-5BSx4	500	5/16-18	1/2	3	4	11/16
IL126-6Bx3/4	IL126-6BSx3/4	1000	3/8-16	1/2	3	3/4	11/16
IL126-6Bx15-HX	IL126-6BSx15-HX	1000	3/8-16	1/2	3	1-1/2	11/16
IL126-6B	IL126-6BS	1000	3/8-16	1/2	3	1-9/16	11/16
IL126-6Bx1	IL126-6BSx1	1000	3/8-16	1/2	3	1	11/16
IL126-6Bx2	IL126-6BSx2	1000	3/8-16	1/2	3	2	11/16
IL126-6Bx2-HX	IL126-6BSx2-HX	1000	3/8-16	1/2	3	2	11/16
IL126-6Bx3	IL126-6BSx3	1000	3/8-16	1/2	3	3	11/16
IL126-6Bx3-HX	IL126-6BSx3-HX	1000	3/8-16	1/2	3	3	11/16
IL126-6Bx4	IL126-6BSx4	1000	3/8-16	1/2	3	4	11/16
IL126-6Bx45-HX	IL126-6BSx45-HX	1000	3/8-16	1/2	3	4-1/2	11/16
IL126-6Bx6-HX	IL126-6BSx6-HX	1000	3/8-16	1/2	3	6	11/16
IL126-6FBx1	IL126-6FBSx1	1000	3/8-24	1/2	3	1	11/16
IL126-6FBx2	IL126-6FBSx2	1000	3/8-24	1/2	3	2	11/16
IL126-7B	IL126-7BS	2000	1/2-13	1/2	3	1-9/16	11/16
IL126-7Bx2	IL126-7BSx2	2000	1/2-13	1/2	3	2	11/16
IL126-7Bx2-HX	IL126-7BSx2-HX	2000	1/2-13	1/2	3	2	11/16
IL126-7Bx25-HX	IL126-7BSx25-HX	2000	1/2-13	1/2	3	2-1/2	11/16
IL126-7Bx3	IL126-7BSx3	2000	1/2-13	1/2	3	3	11/16
IL126-7Bx3-HX	IL126-7BSx3-HX	2000	1/2-13	1/2	3	3	11/16
IL126-7Bx35-HX	IL126-7BSx35-HX	2000	1/2-13	1/2	3	3-1/2	11/16
IL126-7Bx4	IL126-7BSx4	2000	1/2-13	1/2	3	4	11/16
IL126-7Bx4-HX	IL126-7BSx4-HX	2000	1/2-13	1/2	3	4	11/16
IL126-7Bx5	IL126-7BSx5	2000	1/2-13	1/2	3	5	11/16
IL126-7Bx5-HX	IL126-7BSx5-HX	2000	1/2-13	1/2	3	5	11/16
IL126-7Bx6-HX	IL126-7BSx6-HX	1500	1/2-13	1/2	3	6	11/16
IL126-7Bx8-HX	IL126-7BSx8-HX	1000	1/2-13	1/2	3	8	11/16
IL126-7FBx1	IL126-7FBSx1	2000	1/2-20	1/2	3	1	11/16
IL126-7FBx2	IL126-7FBSx2	2000	1/2-20	1/2	3	2	11/16
IL126-7FBx4	IL126-7FBSx4	2000	1/2-20	1/2	3	4	11/16
IL126-8B	IL126-8BS	2500	5/8-11	5/8	3	1-9/16	11/16
IL126-8Bx3	IL126-8BSx3	2500	5/8-11	5/8	3	3	11/16
IL126-8Bx4	IL126-8BSx4	2500	5/8-11	5/8	3	4	11/16
IL126-8Bx5	IL126-8BSx5	2500	5/8-11	5/8	3	5	11/16
IL126-9B	IL126-9BS	3000	3/4-10	3/4	3	1-9/16	11/16
IL126-9Bx3	IL126-9BSx3	3000	3/4-10	3/4	3	3	11/16
IL126-9Bx4	IL126-9BSx4	3000	3/4-10	3/4	3	4	11/16
IL127-4Bx1/2	IL127-4BSx1/2	100	1/4-20	1/2	4	1/2	11/16
IL127-4Bx1	IL127-4BSx1	100	1/4-20	1/2	4	1	11/16
IL127-4B	IL127-4BS	100	1/4-20	1/2	4	1-9/16	11/16
IL127-4Bx2-HX	IL127-4BSx2-HX	100	1/4-20	1/2	4	2	11/16
IL127-4Bx25	IL127-4BSx25	100	1/4-20	1/2	4	2-1/2	11/16
IL127-5Bx3/4	IL127-5BSx3/4	100	1/4-20	1/2	4	3/4	11/16
IL127-5Bx15-HX	IL127-5BSx15-HX	500	5/16-18	1/2	4	3/4	11/16
IL127-5B	IL127-5BS	500	5/16-18	1/2	4	1-1/2	11/16
IL127-5Bx25-HX	IL127-5BSx25-HX	500	5/16-18	1/2	4	1-9/16	11/16
IL127-5Bx3	IL127-5BSx3	500	5/16-18	1/2	4	2-1/2	11/16
IL127-5Bx4	IL127-5BSx4	500	5/16-18	1/2	4	3	11/16
IL127-6Bx3/4	IL127-6BSx3/4	1000	3/8-16	1/2	4	3/4	11/16
IL127-6Bx15-HX	IL127-6BSx15-HX	1000	3/8-16	1/2	4	1-1/2	11/16
IL127-6B	IL127-6BS	1000	3/8-16	1/2	4	1-9/16	11/16
IL127-6Bx1	IL127-6BSx1	1000	3/8-16	1/2	4	1	11/16
IL127-6Bx2	IL127-6BSx2	1000	3/8-16	1/2	4	2	11/16
IL127-6Bx2-HX	IL127-6BSx2-HX	1000	3/8-16	1/2	4	2	11/16
IL127-6Bx3	IL127-6BSx3	1000	3/8-16	1/2	4	3	11/16
IL127-6Bx3-HX	IL127-6BSx3-HX	1000	3/8-16	1/2	4	3	11/16
IL127-6Bx4	IL127-6BSx4	1000	3/8-16	1/2	4	4	11/16
IL127-6Bx45-HX	IL127-6BSx45-HX	1000	3/8-16	1/2	4	4-1/2	11/16
IL127-6Bx6-HX	IL127-6BSx6-HX	1000	3/8-16	1/2	4	6	11/16
IL127-6FBx1	IL127-6FBSx1	1000	3/8-24	1/2	4	1	11/16
IL127-6FBx2	IL127-6FBSx2	1000	3/8-24	1/2	4	2	11/16
IL127-7B	IL127-7BS	2000	1/2-13	1/2	4	1-9/16	11/16
IL127-7Bx2	IL127-7BSx2	2000	1/2-13	1/2	4	2	11/16
IL127-7Bx2-HX	IL127-7BSx2-HX	2000	1/2-13	1/2	4	2	11/16
IL127-7Bx25-HX	IL127-7BSx25-HX	2000	1/2-13	1/2	4	2-1/2	11/16
IL127-7Bx3	IL127-7BSx3	2000	1/2-13	1/2	4	3	11/16
IL127-7Bx3-HX	IL127-7BSx3-HX	2000	1/2-13	1/2	4	3	11/16
IL127-7Bx35-HX	IL127-7BSx35-HX	2000	1/2-13	1/2	4	3-1/2	11/16
IL127-7Bx4	IL127-7BSx4	2000	1/2-13	1/2	4	4	11/16
IL127-7Bx4-HX	IL127-7BSx4-HX	2000	1/2-13	1/2	4	4	11/16
IL127-7Bx5	IL127-7BSx5	2000	1/2-13	1/2	4	5	11/16
IL127-7Bx5-HX	IL127-7BSx5-HX	2000	1/2-13	1/2	4	5	11/16
IL127-7Bx6-HX	IL127-7BSx6-HX	1500	1/2-13	1/2	4	6	11/16
IL127-7Bx8-HX	IL127-7BSx8-HX	1000	1/2-13	1/2	4	8	11/16



Medium Duty Low-Profile, **SAUCER BASE®** Fixed Stud Metric Levelers


The IEC *Saucer Base® Fixed Stud Metric Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick **with a bottom hex drive molded into the base.** Steel stud and washer have clear zinc plating.

Features

- Loads to 2500 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



These metric threads may be special-ordered with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N) or with the external top hex shown here (add -HX to P/N). Many top hex options (-HX) are already stock items in the english thread version of these levelers.

METRIC LOW PROFILE FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL120-M6Bx25	IL120-M6BSx25	100	M6	1/2	3/4	25	3/4
IL120-M6Bx38	IL120-M6BSx38	100	M6	1/2	3/4	38	3/4
IL120-M6Bx51	IL120-M6BSx51	100	M6	1/2	3/4	51	3/4
IL120-M8Bx38	IL120-M8BSx38	500	M8	1/2	3/4	38	3/4
IL120-M8Bx51	IL120-M8BSx51	500	M8	1/2	3/4	51	3/4
IL120-M8Bx62	IL120-M8BSx62	500	M8	1/2	3/4	62	3/4
IL120-M10Bx38	IL120-M10BSx38	1000	M10	1/2	3/4	38	3/4
IL120-M10Bx51	IL120-M10BSx51	1000	M10	1/2	3/4	51	3/4
IL120-M10Bx62	IL120-M10BSx62	1000	M10	1/2	3/4	62	3/4
IL120-M12Bx38	IL120-M12BSx38	2000	M12	1/2	3/4	38	3/4
IL120-M12Bx51	IL120-M12BSx51	2000	M12	1/2	3/4	51	3/4
IL120-M12Bx75	IL120-M12BSx75	2000	M12	1/2	3/4	75	3/4
IL120-M12Bx102	IL120-M12BSx102	2000	M12	1/2	3/4	102	3/4
IL120-M16Bx51	IL120-M16BSx51	2500	M16	5/8	3/4	51	3/4
IL120-M16Bx90-BR	IL120-M16BSx90-BR	2500	M16	5/8	3/4	90	3/4
IL120-M16Bx102	IL120-M16BSx102	2500	M16	5/8	3/4	102	3/4
IL120-M16Bx115-BR	IL120-M16BSx115-BR	2500	M16	5/8	3/4	115	3/4
IL121-M6Bx25	IL121-M6BSx25	100	M6	1/2	1	25	3/4
IL121-M6Bx38	IL121-M6BSx38	100	M6	1/2	1	38	3/4
IL121-M6Bx51	IL121-M6BSx51	100	M6	1/2	1	51	3/4
IL121-M8Bx38	IL121-M8BSx38	500	M8	1/2	1	38	3/4
IL121-M8Bx51	IL121-M8BSx51	500	M8	1/2	1	51	3/4
IL121-M8Bx62	IL121-M8BSx62	500	M8	1/2	1	62	3/4
IL121-M10Bx38	IL121-M10BSx38	1000	M10	1/2	1	38	3/4
IL121-M10Bx51	IL121-M10BSx51	1000	M10	1/2	1	51	3/4
IL121-M10Bx62	IL121-M10BSx62	1000	M10	1/2	1	62	3/4
IL121-M12Bx38	IL121-M12BSx38	2000	M12	1/2	1	38	3/4
IL121-M12Bx51	IL121-M12BSx51	2000	M12	1/2	1	51	3/4
IL121-M12Bx75	IL121-M12BSx75	2000	M12	1/2	1	75	3/4
IL121-M12Bx102	IL121-M12BSx102	2000	M12	1/2	1	102	3/4
IL121-M16Bx51	IL121-M16BSx51	2500	M16	5/8	1	51	3/4
IL121-M16Bx90-BR	IL121-M16BSx90-BR	2500	M16	5/8	1	90	3/4
IL121-M16Bx102	IL121-M16BSx102	2500	M16	5/8	1	102	3/4
IL121-M16Bx115-BR	IL121-M16BSx115-BR	2500	M16	5/8	1	115	3/4



Medium Duty Low-Profile, **SAUCER BASE®** Fixed Stud Metric Levelers


The IEC *Saucer Base® Fixed Stud Metric Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a **bottom hex drive molded into the base. Steel stud and washer have clear zinc plating.**

Features

- Loads to 2500 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



METRIC LOW PROFILE FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL122-M6Bx25	IL122-M6BSx25	100	M6	1/2	1-1/4	25	3/4
IL122-M6Bx38	IL122-M6BSx38	100	M6	1/2	1-1/4	38	3/4
IL122-M6Bx51	IL122-M6BSx51	100	M6	1/2	1-1/4	51	3/4
IL122-M8Bx38	IL122-M8BSx38	500	M8	1/2	1-1/4	38	3/4
IL122-M8Bx51	IL122-M8BSx51	500	M8	1/2	1-1/4	51	3/4
IL122-M8Bx62	IL122-M8BSx62	500	M8	1/2	1-1/4	62	3/4
IL122-M10Bx38	IL122-M10BSx38	1000	M10	1/2	1-1/4	38	3/4
IL122-M10Bx51	IL122-M10BSx51	1000	M10	1/2	1-1/4	51	3/4
IL122-M10Bx62	IL122-M10BSx62	1000	M10	1/2	1-1/4	62	3/4
IL122-M12Bx38	IL122-M12BSx38	2000	M12	1/2	1-1/4	38	3/4
IL122-M12Bx51	IL122-M12BSx51	2000	M12	1/2	1-1/4	51	3/4
IL122-M12Bx75	IL122-M12BSx75	2000	M12	1/2	1-1/4	75	3/4
IL122-M12Bx102	IL122-M12BSx102	2000	M12	1/2	1-1/4	102	3/4
IL122-M16Bx51	IL122-M16BSx51	2500	M16	5/8	1-1/4	51	3/4
IL122-M16Bx90-BR	IL122-M16BSx90-BR	2500	M16	5/8	1-1/4	90	3/4
IL122-M16Bx102	IL122-M16BSx102	2500	M16	5/8	1-1/4	102	3/4
IL122-M16Bx115-BR	IL122-M16BSx115-BR	2500	M16	5/8	1-1/4	115	3/4
IL123-M6Bx25	IL123-M6BSx25	100	M6	1/2	1-1/2	25	3/4
IL123-M6Bx38	IL123-M6BSx38	100	M6	1/2	1-1/2	38	3/4
IL123-M6Bx51	IL123-M6BSx51	100	M6	1/2	1-1/2	51	3/4
IL123-M8Bx38	IL123-M8BSx38	500	M8	1/2	1-1/2	38	3/4
IL123-M8Bx51	IL123-M8BSx51	500	M8	1/2	1-1/2	51	3/4
IL123-M8Bx62	IL123-M8BSx62	500	M8	1/2	1-1/2	62	3/4
IL123-M10Bx38	IL123-M10BSx38	1000	M10	1/2	1-1/2	38	3/4
IL123-M10Bx51	IL123-M10BSx51	1000	M10	1/2	1-1/2	51	3/4
IL123-M10Bx62	IL123-M10BSx62	1000	M10	1/2	1-1/2	62	3/4
IL123-M12Bx38	IL123-M12BSx38	2000	M12	1/2	1-1/2	38	3/4
IL123-M12Bx51	IL123-M12BSx51	2000	M12	1/2	1-1/2	51	3/4
IL123-M12Bx75	IL123-M12BSx75	2000	M12	1/2	1-1/2	75	3/4
IL123-M12Bx102	IL123-M12BSx102	2000	M12	1/2	1-1/2	102	3/4
IL123-M16Bx51	IL123-M16BSx51	2500	M16	5/8	1-1/2	51	3/4
IL123-M16Bx90-BR	IL123-M16BSx90-BR	2500	M16	5/8	1-1/2	90	3/4
IL123-M16Bx102	IL123-M16BSx102	2500	M16	5/8	1-1/2	102	3/4
IL123-M16Bx115-BR	IL123-M16BSx115-BR	2500	M16	5/8	1-1/2	115	3/4

These metric threads may be special-ordered with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N) or with the external top hex shown here (add -HX to P/N). Many top hex options (-HX) are already stock items in the english thread version of these levelers.



Medium Duty Low-Profile, **SAUCER BASE®** Fixed Stud Metric Levelers


The IEC *Saucer Base® Fixed Stud Metric Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick **with a bottom hex drive molded into the base.** Steel stud and washer have clear zinc plating.

Features


- Loads to 2500 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



These metric threads may be special-ordered with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N) or with the external top hex shown here (add -HX to P/N). Many top hex options (-HX) are already stock items in the english thread version of these levelers.

METRIC LOW PROFILE FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL124-M6Bx25	IL124-M6BSx25	100	M6	1/2	1-3/4	25	3/4
IL124-M6Bx38	IL124-M6BSx38	100	M6	1/2	1-3/4	38	3/4
IL124-M6Bx51	IL124-M6BSx51	100	M6	1/2	1-3/4	51	3/4
IL124-M8Bx38	IL124-M8BSx38	500	M8	1/2	1-3/4	38	3/4
IL124-M8Bx51	IL124-M8BSx51	500	M8	1/2	1-3/4	51	3/4
IL124-M8Bx62	IL124-M8BSx62	500	M8	1/2	1-3/4	62	3/4
IL124-M10Bx38	IL124-M10BSx38	1000	M10	1/2	1-3/4	38	3/4
IL124-M10Bx51	IL124-M10BSx51	1000	M10	1/2	1-3/4	51	3/4
IL124-M10Bx62	IL124-M10BSx62	1000	M10	1/2	1-3/4	62	3/4
IL124-M12Bx38	IL120-M12BSx38	2000	M12	1/2	1-3/4	38	3/4
IL124-M12Bx51	IL124-M12BSx51	2000	M12	1/2	1-3/4	51	3/4
IL124-M12Bx75	IL124-M12BSx75	2000	M12	1/2	1-3/4	75	3/4
IL124-M12Bx102	IL124-M12BSx102	2000	M12	1/2	1-3/4	102	3/4
IL124-M16Bx51	IL124-M16BSx51	2500	M16	5/8	1-3/4	51	3/4
IL124-M16Bx90-BR	IL124-M16BSx90-BR	2500	M16	5/8	1-3/4	90	3/4
IL124-M16Bx102	IL124-M16BSx102	2500	M16	5/8	1-3/4	102	3/4
IL124-M16Bx115-BR	IL124-M16BSx115-BR	2500	M16	5/8	1-3/4	115	3/4
IL125-M6Bx25	IL125-M6BSx25	100	M6	1/2	2	25	3/4
IL125-M6Bx38	IL125-M6BSx38	100	M6	1/2	2	38	3/4
IL125-M6Bx51	IL125-M6BSx51	100	M6	1/2	2	51	3/4
IL125-M8Bx38	IL125-M8BSx38	500	M8	1/2	2	38	3/4
IL125-M8Bx51	IL125-M8BSx51	500	M8	1/2	2	51	3/4
IL125-M8Bx62	IL125-M8BSx62	500	M8	1/2	2	62	3/4
IL125-M10Bx38	IL125-M10BSx38	1000	M10	1/2	2	38	3/4
IL125-M10Bx51	IL125-M10BSx51	1000	M10	1/2	2	51	3/4
IL125-M10Bx62	IL125-M10BSx62	1000	M10	1/2	2	62	3/4
IL125-M12Bx38	IL125-M12BSx38	2000	M12	1/2	2	38	3/4
IL125-M12Bx51	IL125-M12BSx51	2000	M12	1/2	2	51	3/4
IL125-M12Bx75	IL125-M12BSx75	2000	M12	1/2	2	75	3/4
IL125-M12Bx102	IL125-M12BSx102	2000	M12	1/2	2	102	3/4
IL125-M16Bx51	IL125-M16BSx51	2500	M16	5/8	2	51	3/4
IL125-M16Bx90-BR	IL125-M16BSx90-BR	2500	M16	5/8	2	90	3/4
IL125-M16Bx102	IL125-M16BSx102	2500	M16	5/8	2	102	3/4
IL125-M16Bx115-BR	IL125-M16BSx115-BR	2500	M16	5/8	2	115	3/4



Medium Duty Low-Profile, **SAUCER BASE®** Fixed Stud Metric Levelers


The IEC *Saucer Base® Fixed Stud Metric Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a **bottom hex drive molded into the base. Steel stud and washer have clear zinc plating.**

Features

- Loads to 2500 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



METRIC LOW PROFILE FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL126-M6Bx25	IL126-M6BSx25	100	M6	1/2	3	25	3/4
IL126-M6Bx38	IL126-M6BSx38	100	M6	1/2	3	38	3/4
IL126-M6Bx51	IL126-M6BSx51	100	M6	1/2	3	51	3/4
IL126-M8Bx38	IL126-M8BSx38	500	M8	1/2	3	38	3/4
IL126-M8Bx51	IL126-M8BSx51	500	M8	1/2	3	51	3/4
IL126-M8Bx62	IL126-M8BSx62	500	M8	1/2	3	62	3/4
IL126-M10Bx38	IL126-M10BSx38	1000	M10	1/2	3	38	3/4
IL126-M10Bx51	IL126-M10BSx51	1000	M10	1/2	3	51	3/4
IL126-M10Bx62	IL126-M10BSx62	1000	M10	1/2	3	62	3/4
IL126-M12Bx38	IL126-M12BSx38	2000	M12	1/2	3	38	3/4
IL126-M12Bx51	IL126-M12BSx51	2000	M12	1/2	3	51	3/4
IL126-M12Bx75	IL126-M12BSx75	2000	M12	1/2	3	75	3/4
IL126-M12Bx102	IL126-M12BSx102	2000	M12	1/2	3	102	3/4
IL126-M16Bx51	IL126-M16BSx51	2500	M16	5/8	3	51	3/4
IL126-M16Bx90-BR	IL126-M16BSx90-BR	2500	M16	5/8	3	90	3/4
IL126-M16Bx102	IL126-M16BSx102	2500	M16	5/8	3	102	3/4
IL126-M16Bx115-BR	IL126-M16BSx115-BR	2500	M16	5/8	3	115	3/4
IL127-M6Bx25	IL127-M6BSx25	100	M6	1/2	4	25	3/4
IL127-M6Bx38	IL127-M6BSx38	100	M6	1/2	4	38	3/4
IL127-M6Bx51	IL127-M6BSx51	100	M6	1/2	4	51	3/4
IL127-M8Bx38	IL127-M8BSx38	500	M8	1/2	4	38	3/4
IL127-M8Bx51	IL127-M8BSx51	500	M8	1/2	4	51	3/4
IL127-M8Bx62	IL127-M8BSx62	500	M8	1/2	4	62	3/4
IL127-M10Bx38	IL127-M10BSx38S	1000	M10	1/2	4	38	3/4
IL127-M10Bx51	IL127-M10BSx51S	1000	M10	1/2	4	51	3/4
IL127-M10Bx62	IL127-M10BSx62S	1000	M10	1/2	4	62	3/4
IL127-M12Bx38	IL127-M12BSx38	2000	M12	1/2	4	38	3/4
IL127-M12Bx51	IL127-M12BSx51	2000	M12	1/2	4	51	3/4
IL127-M12Bx75	IL127-M12BSx75	2000	M12	1/2	4	75	3/4
IL127-M12Bx102	IL127-M12BSx102	2000	M12	1/2	4	102	3/4
IL127-M16Bx51	IL127-M16BSx51	2500	M16	5/8	4	51	3/4
IL127-M16Bx90-BR	IL127-M16BSx90-BR	2500	M16	5/8	4	90	3/4
IL127-M16Bx102	IL127-M16BSx102	2500	M16	5/8	4	102	3/4
IL127-M16Bx115-BR	IL127-M16BSx115-BR	2500	M16	5/8	4	115	3/4

These metric threads may be special-ordered with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N) or with the external top hex shown here (add -HX to P/N). Many top hex options (-HX) are already stock items in the english thread version of these levelers.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, SAUCER BASE® Swivel Stud Levelers

The IEC Saucer Base® Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

MEDIUM-DUTY LEVELERS

SAUCER BASE® SWIVEL STUD

1" to 2" STUD LENGTHS



PATENT PENDING



OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 1" to 2" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-4Gx1	IL130-4Sx1	100	1/4-20	1/2	3/4	3/4	1-3/4	1	3/16
IL130-4Gx15	IL130-4Sx15	100	1/4-20	1/2	3/4	3/4	2-1/4	1-1/2	3/16
IL130-4G	IL130-4S	100	1/4-20	1/2	3/4	3/4	2-3/4	2	3/16
IL130-5Gx1	IL130-5Sx1	500	5/16-18	1/2	3/4	3/4	1-3/4	1	3/16
IL130-5G	IL130-5S	500	5/16-18	1/2	3/4	3/4	2-3/4	2	3/16
IL130-6G	IL130-6S	1000	3/8-16	1/2	3/4	3/4	2-3/4	2	3/16
IL130-7G	IL130-7S	2000	1/2-13	1/2	3/4	3/4	2-3/4	2	3/16
IL130-8G	IL130-8S	3000	5/8-11	5/8	3/4	3/4	2-3/4	2	3/16
IL130-9G	IL130-9S	3000	3/4-10	3/4	3/4	3/4	2-3/4	2	3/16
IL130-10G	IL130-10S	3000	1-8	1	1	3/4	3	2	1/2
IL130-12G	IL130-12S	3000	1 1/4-7	1 1/4	1	3/4	3	2	1/2
IL131-4Gx1	IL131-4Sx1	100	1/4-20	1/2	3/4	1	1-3/4	1	3/16
IL131-4Gx15	IL131-4Sx15	100	1/4-20	1/2	3/4	1	2-1/4	1-1/2	3/16
IL131-4G	IL131-4S	100	1/4-20	1/2	3/4	1	2-3/4	2	3/16
IL131-5Gx1	IL131-5Sx1	500	5/16-18	1/2	3/4	1	1-3/4	1	3/16
IL131-5G	IL131-5S	500	5/16-18	1/2	3/4	1	2-3/4	2	3/16
IL131-6G	IL131-6S	1000	3/8-16	1/2	3/4	1	2-3/4	2	3/16
IL131-7G	IL131-7S	2000	1/2-13	1/2	3/4	1	2-3/4	2	3/16
IL131-8G	IL131-8S	3000	5/8-11	5/8	3/4	1	2-3/4	2	3/16
IL131-9G	IL131-9S	3000	3/4-10	3/4	3/4	1	2-3/4	2	3/16
IL131-10G	IL131-10S	3000	1-8	1	1	1	3	2	1/2
IL131-12G	IL131-12S	3000	1 1/4-7	1 1/4	1	1	3	2	1/2
IL132-4Gx1	IL132-4Sx1	100	1/4-20	1/2	3/4	1-1/4	1-3/4	1	3/16
IL132-4Gx15	IL132-4Sx15	100	1/4-20	1/2	3/4	1-1/4	2-1/4	1-1/2	3/16
IL132-4G	IL132-4S	100	1/4-20	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-5Gx1	IL132-5Sx1	500	5/16-18	1/2	3/4	1-1/4	1-3/4	1	3/16
IL132-5G	IL132-5S	500	5/16-18	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-6G	IL132-6S	1000	3/8-16	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-7G	IL132-7S	2000	1/2-13	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-8G	IL132-8S	3000	5/8-11	5/8	3/4	1-1/4	2-3/4	2	3/16
IL132-9G	IL132-9S	3000	3/4-10	3/4	3/4	1-1/4	2-3/4	2	3/16
IL132-10G	IL132-10S	3000	1-8	1	1	1-1/4	3	2	1/2
IL132-12G	IL132-12S	3000	1 1/4-7	1 1/4	1	1-1/4	3	2	1/2
IL133-4Gx1	IL133-4Sx1	100	1/4-20	1/2	3/4	1-1/2	1-3/4	1	3/16
IL133-4Gx15	IL133-4Sx15	100	1/4-20	1/2	3/4	1-1/2	2-1/4	1-1/2	3/16
IL133-4G	IL133-4S	100	1/4-20	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-5Gx1	IL133-5Sx1	500	5/16-18	1/2	3/4	1-1/2	1-3/4	1	3/16
IL133-5G	IL133-5S	500	5/16-18	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-6G	IL133-6S	1000	3/8-16	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-7G	IL133-7S	2000	1/2-13	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-8G	IL133-8S	3000	5/8-11	5/8	3/4	1-1/2	2-3/4	2	3/16
IL133-9G	IL133-9S	3000	3/4-10	3/4	3/4	1-1/2	2-3/4	2	3/16
IL133-10G	IL133-10S	3000	1-8	1	1	1-1/2	3	2	1/2
IL133-12G	IL133-12S	3000	1 1/4-7	1 1/4	1	1-1/2	3	2	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, SAUCER BASE® Swivel Stud Levelers

The IEC Saucer Base® Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.


More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

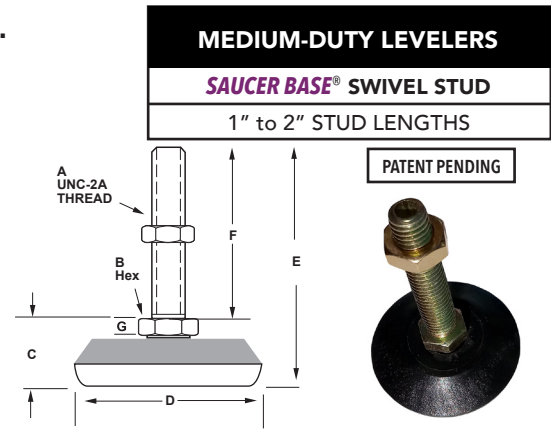

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	
		Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 1"to 2" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-4Gx1	IL134-4Sx1	100	1/4-20	1/2	3/4	1-3/4	1-3/4	1	3/16
IL134-4Gx15	IL134-4Sx15	100	1/4-20	1/2	3/4	1-3/4	2-1/4	1-1/2	3/16
IL134-4G	IL134-4S	100	1/4-20	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-5Gx1	IL134-5Sx1	500	5/16-18	1/2	3/4	1-3/4	1-3/4	1	3/16
IL134-5G	IL134-5S	500	5/16-18	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-6G	IL134-6S	1000	3/8-16	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-7G	IL134-7S	2000	1/2-13	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-8G	IL134-8S	3000	5/8-11	5/8	3/4	1-3/4	2-3/4	2	3/16
IL134-9G	IL134-9S	3000	3/4-10	3/4	3/4	1-3/4	2-3/4	2	3/16
IL134-10G	IL134-10S	3000	1-8	1	1	1-3/4	3	2	1/2
IL134-12G	IL134-12S	3000	1 1/4-7	1 1/4	1	1-3/4	3	2	1/2
IL135-4Gx1	IL135-4Sx1	100	1/4-20	1/2	3/4	2	1-3/4	1	3/16
IL135-4Gx15	IL135-4Sx15	100	1/4-20	1/2	3/4	2	2-1/4	1-1/2	3/16
IL135-4G	IL135-4S	100	1/4-20	1/2	3/4	2	2-3/4	2	3/16
IL135-5Gx1	IL135-5Sx1	500	5/16-18	1/2	3/4	2	1-3/4	1	3/16
IL135-5G	IL135-5S	500	5/16-18	1/2	3/4	2	2-3/4	2	3/16
IL135-6G	IL135-6S	1000	3/8-16	1/2	3/4	2	2-3/4	2	3/16
IL135-7G	IL135-7S	2000	1/2-13	1/2	3/4	2	2-3/4	2	3/16
IL135-8G	IL135-8S	3000	5/8-11	5/8	3/4	2	2-3/4	2	3/16
IL135-9G	IL135-9S	3000	3/4-10	3/4	3/4	2	2-3/4	2	3/16
IL135-10G	IL135-10S	3000	1-8	1	1	2	3	2	1/2
IL135-12G	IL135-12S	3000	1 1/4-7	1 1/4	1	2	3	2	1/2
IL136-4Gx1	IL136-4Sx1	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL136-4Gx15	IL136-4Sx15	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL136-4G	IL136-4S	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL136-5Gx1	IL136-5Sx1	500	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL136-5G	IL136-5S	500	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL136-6G	IL136-6S	1000	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL136-7G	IL136-7S	2000	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL136-8G	IL136-8S	3000	5/8-11	5/8	3/4	3	2-3/4	2	3/16
IL136-9G	IL136-9S	3000	3/4-10	3/4	3/4	3	2-3/4	2	3/16
IL136-10G	IL136-10S	3000	1-8	1	1	3	3	2	1/2
IL136-12G	IL136-12S	3000	1 1/4-7	1 1/4	1	3	3	2	1/2
IL137-4Gx1	IL137-4Sx1	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL137-4Gx15	IL137-4Sx15	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL137-4G	IL137-4S	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL137-5Gx1	IL137-5Sx1	500	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL137-5G	IL137-5S	500	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL137-6G	IL137-6S	1000	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL137-7G	IL137-7S	2000	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL137-8G	IL137-8S	3000	5/8-11	5/8	3/4	4	2-3/4	2	3/16
IL137-9G	IL137-9S	3000	3/4-10	3/4	3/4	4	2-3/4	2	3/16
IL137-10G	IL137-10S	3000	1-8	1	1	4	3	2	1/2
IL137-12G	IL137-12S	3000	1 1/4-7	1-1/4	1	4	3	2	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Swivel Stud Levelers

The IEC Saucer Base® Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

MEDIUM-DUTY LEVELERS

SAUCER BASE® SWIVEL STUD

3" STUD LENGTHS

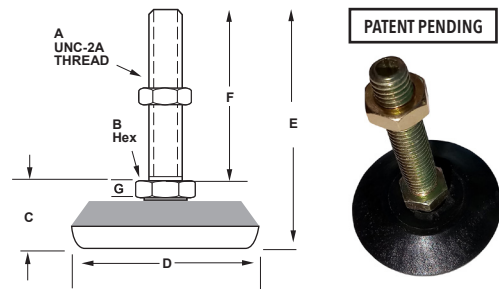


OPTIONAL BASE COLORS



OTHER FINISHES

Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 3" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-4Gx3	IL130-4Sx3	100	1/4-20	1/2	3/4	3/4	3-3/4	3	3/16
IL130-5Gx3	IL130-5Sx3	500	5/16-18	1/2	3/4	3/4	3-3/4	3	3/16
IL130-6Gx3	IL130-6Sx3	1000	3/8-16	1/2	3/4	3/4	3-3/4	3	3/16
IL130-7Gx3	IL130-7Sx3	2000	1/2-13	1/2	3/4	3/4	3-3/4	3	3/16
IL130-8Gx3	IL130-8Sx3	3000	5/8-11	5/8	3/4	3/4	3-3/4	3	3/16
IL130-9Gx3	IL130-9Sx3	3000	3/4-10	3/4	3/4	3/4	3-3/4	3	3/16
IL130-10Gx3	IL130-10Sx3	3000	1-8	1	1	3/4	4	3	1/2
IL130-12Gx3	IL130-12Sx3	3000	1 1/4-7	1 1/4	1	3/4	4	3	1/2
IL131-4Gx3	IL131-4Sx3	100	1/4-20	1/2	3/4	1	3-3/4	3	3/16
IL131-5Gx3	IL131-5Sx3	500	5/16-18	1/2	3/4	1	3-3/4	3	3/16
IL131-6Gx3	IL131-6Sx3	1000	3/8-16	1/2	3/4	1	3-3/4	3	3/16
IL131-7Gx3	IL131-7Sx3	2000	1/2-13	1/2	3/4	1	3-3/4	3	3/16
IL131-8Gx3	IL131-8Sx3	3000	5/8-11	5/8	3/4	1	3-3/4	3	3/16
IL131-9Gx3	IL131-9Sx3	3000	3/4-10	3/4	3/4	1	3-3/4	3	3/16
IL131-10Gx3	IL131-10Sx3	3000	1-8	1	1	1	4	3	1/2
IL131-12Gx3	IL131-12Sx3	3000	1 1/4-7	1 1/4	1	1	4	3	1/2
IL132-4Gx3	IL132-4Sx3	100	1/4-20	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-5Gx3	IL132-5Sx3	500	5/16-18	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-6Gx3	IL132-6Sx3	1000	3/8-16	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-7Gx3	IL132-7Sx3	2000	1/2-13	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-8Gx3	IL132-8Sx3	3000	5/8-11	5/8	3/4	1-1/4	3-3/4	3	3/16
IL132-9Gx3	IL132-9Sx3	3000	3/4-10	3/4	3/4	1-1/4	3-3/4	3	3/16
IL132-10Gx3	IL132-10Sx3	3000	1-8	1	1	1-1/4	4	3	1/2
IL132-12Gx3	IL132-12Sx3	3000	1 1/4-7	1 1/4	1	1-1/4	4	3	1/2
IL133-4Gx3	IL133-4Sx3	100	1/4-20	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-5Gx3	IL133-5Sx3	500	5/16-18	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-6Gx3	IL133-6Sx3	1000	3/8-16	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-7Gx3	IL133-7Sx3	2000	1/2-13	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-8Gx3	IL133-8Sx3	3000	5/8-11	5/8	3/4	1-1/2	3-3/4	3	3/16
IL133-9Gx3	IL133-9Sx3	3000	3/4-10	3/4	3/4	1-1/2	3-3/4	3	3/16
IL133-10Gx3	IL133-10Sx3	3000	1-8	1	1	1-1/2	4	3	1/2
IL133-12Gx3	IL133-12Sx3	3000	1 1/4-7	1 1/4	1	1-1/2	4	3	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Swivel Stud Levelers

The IEC *Saucer Base®* Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.


More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

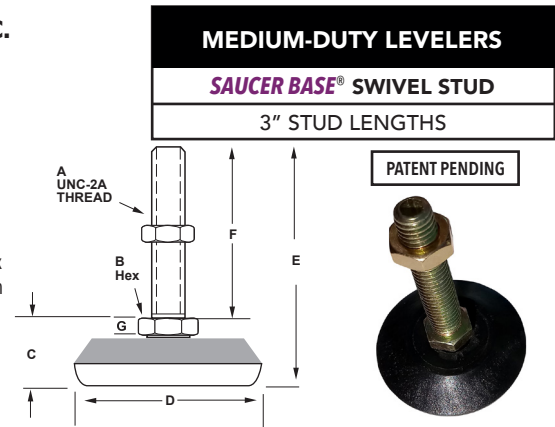

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	
		Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 3" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-4Gx3	IL134-4Sx3	100	1/4-20	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-5Gx3	IL134-5Sx3	500	5/16-18	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-6Gx3	IL134-6Sx3	1000	3/8-16	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-7Gx3	IL134-7Sx3	2000	1/2-13	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-8Gx3	IL134-8Sx3	3000	5/8-11	5/8	3/4	1-3/4	3-3/4	3	3/16
IL134-9Gx3	IL134-9Sx3	3000	3/4-10	3/4	3/4	1-3/4	3-3/4	3	3/16
IL134-10Gx3	IL134-10Sx3	3000	1-8	1	1	1-3/4	4	3	1/2
IL134-12Gx3	IL134-12Sx3	3000	1 1/4-7	1 1/4	1	1-3/4	4	3	1/2
IL135-4Gx3	IL135-4Sx3	100	1/4-20	1/2	3/4	2	3-3/4	3	3/16
IL135-5Gx3	IL135-5Sx3	500	5/16-18	1/2	3/4	2	3-3/4	3	3/16
IL135-6Gx3	IL135-6Sx3	1000	3/8-16	1/2	3/4	2	3-3/4	3	3/16
IL135-7Gx3	IL135-7Sx3	2000	1/2-13	1/2	3/4	2	3-3/4	3	3/16
IL135-8Gx3	IL135-8Sx3	3000	5/8-11	5/8	3/4	2	3-3/4	3	3/16
IL135-9Gx3	IL135-9Sx3	3000	3/4-10	3/4	3/4	2	3-3/4	3	3/16
IL135-10Gx3	IL135-10Sx3	3000	1-8	1	1	2	4	3	1/2
IL135-12Gx3	IL135-12Sx3	3000	1 1/4-7	1 1/4	1	2	4	3	1/2
IL136-4Gx3	IL136-4Sx3	100	1/4-20	1/2	3/4	3	3-3/4	3	3/16
IL136-5Gx3	IL136-5Sx3	500	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL136-6Gx3	IL136-6Sx3	1000	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL136-7Gx3	IL136-7Sx3	2000	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL136-8Gx3	IL136-8Sx3	3000	5/8-11	5/8	3/4	3	3-3/4	3	3/16
IL136-9Gx3	IL136-9Sx3	3000	3/4-10	3/4	3/4	3	3-3/4	3	3/16
IL136-10Gx3	IL136-10Sx3	3000	1-8	1	1	3	4	3	1/2
IL136-12Gx3	IL136-12Sx3	3000	1 1/4-7	1 1/4	1	3	4	3	1/2
IL137-4Gx3	IL137-4Sx3	100	1/4-20	1/2	3/4	4	3-3/4	3	3/16
IL137-5Gx3	IL137-5Sx3	500	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL137-6Gx3	IL137-6Sx3	1000	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL137-7Gx3	IL137-7Sx3	2000	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL137-8Gx3	IL137-8Sx3	3000	5/8-11	5/8	3/4	4	3-3/4	3	3/16
IL137-9Gx3	IL137-9Sx3	3000	3/4-10	3/4	3/4	4	3-3/4	3	3/16
IL137-10Gx3	IL137-10Sx3	3000	1-8	1	1	4	4	3	1/2
IL137-12Gx3	IL137-12Sx3	3000	1 1/4-7	1-1/4	1	4	4	3	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Swivel Stud Levelers

The IEC Saucer Base® Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables

MEDIUM-DUTY LEVELERS

SAUCER BASE® SWIVEL STUD

4" STUD LENGTHS

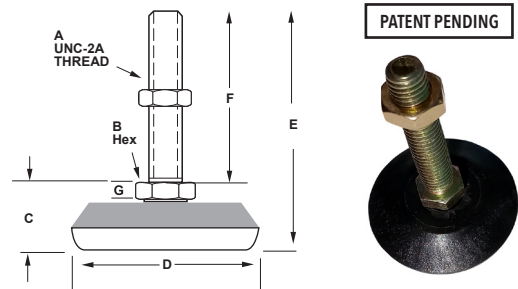


OPTIONAL BASE COLORS



OTHER FINISHES

Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 4" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-5Gx4	IL130-5Sx4	500	5/16-18	1/2	3/4	3/4	4-3/4	4	3/16
IL130-6Gx4	IL130-6Sx4	1000	3/8-16	1/2	3/4	3/4	4-3/4	4	3/16
IL130-7Gx4	IL130-7Sx4	2000	1/2-13	1/2	3/4	3/4	4-3/4	4	3/16
IL130-8Gx4	IL130-8Sx4	3000	5/8-11	5/8	3/4	3/4	4-3/4	4	3/16
IL130-9Gx4	IL130-9Sx4	3000	3/4-10	3/4	3/4	3/4	4-3/4	4	3/16
IL130-10Gx4	IL130-10Sx4	3000	1-8	1	1	3/4	5	4	1/2
IL130-12Gx4	IL130-12Sx4	3000	1 1/4-7	1 1/4	1	3/4	5	4	1/2
IL131-5Gx4	IL131-5Sx4	500	5/16-18	1/2	3/4	1	4-3/4	4	3/16
IL131-6Gx4	IL131-6Sx4	1000	3/8-16	1/2	3/4	1	4-3/4	4	3/16
IL131-7Gx4	IL131-7Sx4	2000	1/2-13	1/2	3/4	1	4-3/4	4	3/16
IL131-8Gx4	IL131-8Sx4	3000	5/8-11	5/8	3/4	1	4-3/4	4	3/16
IL131-9Gx4	IL131-9Sx4	3000	3/4-10	3/4	3/4	1	4-3/4	4	3/16
IL131-10Gx4	IL131-10Sx4	3000	1-8	1	1	1	5	4	1/2
IL131-12Gx4	IL131-12Sx4	3000	1 1/4-7	1 1/4	1	1	5	4	1/2
IL132-5Gx4	IL132-5Sx4	500	5/16-18	1/2	3/4	1-1/4	4-3/4	4	3/16
IL132-6Gx4	IL132-6Sx4	1000	3/8-16	1/2	3/4	1-1/4	4-3/4	4	3/16
IL132-7Gx4	IL132-7Sx4	2000	1/2-13	1/2	3/4	1-1/4	4-3/4	4	3/16
IL132-8Gx4	IL132-8Sx4	3000	5/8-11	5/8	3/4	1-1/4	4-3/4	4	3/16
IL132-9Gx4	IL132-9Sx4	3000	3/4-10	3/4	3/4	1-1/4	4-3/4	4	3/16
IL132-10Gx4	IL132-10Sx4	3000	1-8	1	1	1-1/4	5	4	1/2
IL132-12Gx4	IL132-12Sx4	3000	1 1/4-7	1 1/4	1	1-1/4	5	4	1/2
IL133-5Gx4	IL133-5Sx4	500	5/16-18	1/2	3/4	1-1/2	4-3/4	4	3/16
IL133-6Gx4	IL133-6Sx4	1000	3/8-16	1/2	3/4	1-1/2	4-3/4	4	3/16
IL133-7Gx4	IL133-7Sx4	2000	1/2-13	1/2	3/4	1-1/2	4-3/4	4	3/16
IL133-8Gx4	IL133-8Sx4	3000	5/8-11	5/8	3/4	1-1/2	4-3/4	4	3/16
IL133-9Gx4	IL133-9Sx4	3000	3/4-10	3/4	3/4	1-1/2	4-3/4	4	3/16
IL133-10Gx4	IL133-10Sx4	3000	1-8	1	1	1-1/2	5	4	1/2
IL133-12Gx4	IL133-12Sx4	3000	1 1/4-7	1 1/4	1	1-1/2	5	4	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, SAUCER BASE® Swivel Stud Levelers

The IEC Saucer Base® Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.


More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

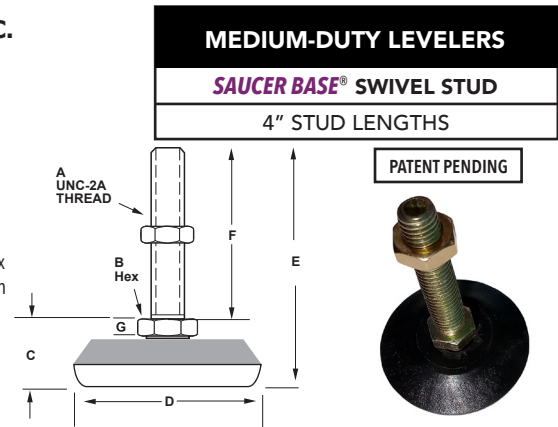

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 4" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-5Gx4	IL134-5Sx4	500	5/16-18	1/2	3/4	1-3/4	4-3/4	4	3/16
IL134-6Gx4	IL134-6Sx4	1000	3/8-16	1/2	3/4	1-3/4	4-3/4	4	3/16
IL134-7Gx4	IL134-7Sx4	2000	1/2-13	1/2	3/4	1-3/4	4-3/4	4	3/16
IL134-8Gx4	IL134-8Sx4	3000	5/8-11	5/8	3/4	1-3/4	4-3/4	4	3/16
IL134-9Gx4	IL134-9Sx4	3000	3/4-10	3/4	3/4	1-3/4	4-3/4	4	3/16
IL134-10Gx4	IL134-10Sx4	3000	1-8	1	1	1-3/4	5	4	1/2
IL134-12Gx4	IL134-12Sx4	3000	1 1/4-7	1 1/4	1	1-3/4	5	4	1/2
IL135-5Gx4	IL135-5Sx4	500	5/16-18	1/2	3/4	2	4-3/4	4	3/16
IL135-6Gx4	IL135-6Sx4	1000	3/8-16	1/2	3/4	2	4-3/4	4	3/16
IL135-7Gx4	IL135-7Sx4	2000	1/2-13	1/2	3/4	2	4-3/4	4	3/16
IL135-8Gx4	IL135-8Sx4	3000	5/8-11	5/8	3/4	2	4-3/4	4	3/16
IL135-9Gx4	IL135-9Sx4	3000	3/4-10	3/4	3/4	2	4-3/4	4	3/16
IL135-10Gx4	IL135-10Sx4	3000	1-8	1	1	2	5	4	1/2
IL135-12Gx4	IL135-12Sx4	3000	1 1/4-7	1 1/4	1	2	5	4	1/2
IL136-5Gx4	IL136-5Sx4	500	5/16-18	1/2	3/4	3	4-3/4	4	3/16
IL136-6Gx4	IL136-6Sx4	1000	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL136-7Gx4	IL136-7Sx4	2000	1/2-13	1/2	3/4	3	4-3/4	4	3/16
IL136-8Gx4	IL136-8Sx4	3000	5/8-11	5/8	3/4	3	4-3/4	4	3/16
IL136-9Gx4	IL136-9Sx4	3000	3/4-10	3/4	3/4	3	4-3/4	4	3/16
IL136-10Gx4	IL136-10Sx4	3000	1-8	1	1	3	5	4	1/2
IL136-12Gx4	IL136-12Sx4	3000	1 1/4-7	1 1/4	1	3	5	4	1/2
IL137-5Gx4	IL137-5Sx4	500	5/16-18	1/2	3/4	4	4-3/4	4	3/16
IL137-6Gx4	IL137-6Sx4	1000	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL137-7Gx4	IL137-7Sx4	2000	1/2-13	1/2	3/4	4	4-3/4	4	3/16
IL137-8Gx4	IL137-8Sx4	3000	5/8-11	5/8	3/4	4	4-3/4	4	3/16
IL137-9Gx4	IL137-9Sx4	3000	3/4-10	3/4	3/4	4	4-3/4	4	3/16
IL137-10Gx4	IL137-10Sx4	3000	1-8	1	1	4	5	4	1/2
IL137-12Gx4	IL137-12Sx4	3000	1 1/4-7	1-1/4	1	4	5	4	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Swivel Stud Levelers

The IEC *Saucer Base® Medium Duty Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

MEDIUM-DUTY LEVELERS

SAUCER BASE® SWIVEL STUD

5" STUD LENGTHS

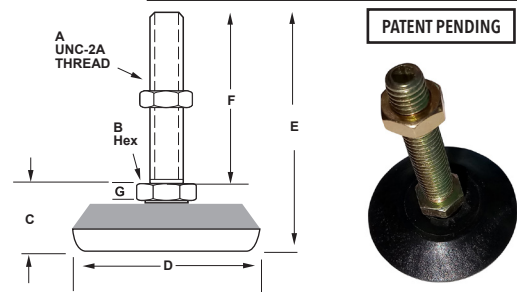

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 5" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-6Gx5	IL130-6Sx5	1000	3/8-16	1/2	3/4	3/4	5-3/4	5	3/16
IL130-7Gx5	IL130-7Sx5	2000	1/2-13	1/2	3/4	3/4	5-3/4	5	3/16
IL130-8Gx5	IL130-8Sx5	3000	5/8-11	5/8	3/4	3/4	5-3/4	5	3/16
IL130-9Gx5	IL130-9Sx5	3000	3/4-10	3/4	3/4	3/4	5-3/4	5	3/16
IL130-10Gx5	IL130-10Sx5	3000	1-8	1	1	3/4	6	5	1/2
IL130-12Gx5	IL130-12Sx5	3000	1 1/4-7	1 1/4	1	3/4	6	5	1/2
IL131-6Gx5	IL131-6Sx5	1000	3/8-16	1/2	3/4	1	5-3/4	5	3/16
IL131-7Gx5	IL131-7Sx5	2000	1/2-13	1/2	3/4	1	5-3/4	5	3/16
IL131-8Gx5	IL131-8Sx5	3000	5/8-11	5/8	3/4	1	5-3/4	5	3/16
IL131-9Gx5	IL131-9Sx5	3000	3/4-10	3/4	3/4	1	5-3/4	5	3/16
IL131-10Gx5	IL131-10Sx5	3000	1-8	1	1	1	6	5	1/2
IL131-12Gx5	IL131-12Sx5	3000	1 1/4-7	1 1/4	1	1	6	5	1/2
IL132-6Gx5	IL132-6Sx5	1000	3/8-16	1/2	3/4	1-1/4	5-3/4	5	3/16
IL132-7Gx5	IL132-7Sx5	2000	1/2-13	1/2	3/4	1-1/4	5-3/4	5	3/16
IL132-8Gx5	IL132-8Sx5	3000	5/8-11	5/8	3/4	1-1/4	5-3/4	5	3/16
IL132-9Gx5	IL132-9Sx5	3000	3/4-10	3/4	3/4	1-1/4	5-3/4	5	3/16
IL132-10Gx5	IL132-10Sx5	3000	1-8	1	1	1-1/4	6	5	1/2
IL132-12Gx5	IL132-12Sx5	3000	1 1/4-7	1 1/4	1	1-1/4	6	5	1/2
IL133-6Gx5	IL133-6Sx5	1000	3/8-16	1/2	3/4	1-1/2	5-3/4	5	3/16
IL133-7Gx5	IL133-7Sx5	2000	1/2-13	1/2	3/4	1-1/2	5-3/4	5	3/16
IL133-8Gx5	IL133-8Sx5	3000	5/8-11	5/8	3/4	1-1/2	5-3/4	5	3/16
IL133-9Gx5	IL133-9Sx5	3000	3/4-10	3/4	3/4	1-1/2	5-3/4	5	3/16
IL133-10Gx5	IL133-10Sx5	3000	1-8	1	1	1-1/2	6	5	1/2
IL133-12Gx5	IL133-12Sx5	3000	1 1/4-7	1 1/4	1	1-1/2	6	5	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Swivel Stud Levelers

The IEC *Saucer Base®* Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

MEDIUM-DUTY LEVELERS

SAUCER BASE® SWIVEL STUD

5" STUD LENGTHS

PATENT PENDING

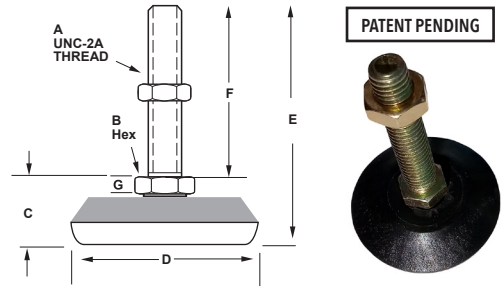

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 5" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-6Gx5	IL134-6Sx5	1000	3/8-16	1/2	3/4	1-3/4	5-3/4	5	3/16
IL134-7Gx5	IL134-7Sx5	2000	1/2-13	1/2	3/4	1-3/4	5-3/4	5	3/16
IL134-8Gx5	IL134-8Sx5	3000	5/8-11	5/8	3/4	1-3/4	5-3/4	5	3/16
IL134-9Gx5	IL134-9Sx5	3000	3/4-10	3/4	3/4	1-3/4	5-3/4	5	3/16
IL134-10Gx5	IL134-10Sx5	3000	1-8	1	1	1-3/4	6	5	1/2
IL134-12Gx5	IL134-12Sx5	3000	1 1/4-7	1 1/4	1	1-3/4	6	5	1/2
IL135-6Gx5	IL135-6Sx5	1000	3/8-16	1/2	3/4	2	5-3/4	5	3/16
IL135-7Gx5	IL135-7Sx5	2000	1/2-13	1/2	3/4	2	5-3/4	5	3/16
IL135-8Gx5	IL135-8Sx5	3000	5/8-11	5/8	3/4	2	5-3/4	5	3/16
IL135-9Gx5	IL135-9Sx5	3000	3/4-10	3/4	3/4	2	5-3/4	5	3/16
IL135-10Gx5	IL135-10Sx5	3000	1-8	1	1	2	6	5	1/2
IL135-12Gx5	IL135-12Sx5	3000	1 1/4-7	1 1/4	1	2	6	5	1/2
IL136-6Gx5	IL136-6Sx5	1000	3/8-16	1/2	3/4	3	5-3/4	5	3/16
IL136-7Gx5	IL136-7Sx5	2000	1/2-13	1/2	3/4	3	5-3/4	5	3/16
IL136-8Gx5	IL136-8Sx5	3000	5/8-11	5/8	3/4	3	5-3/4	5	3/16
IL136-9Gx5	IL136-9Sx5	3000	3/4-10	3/4	3/4	3	5-3/4	5	3/16
IL136-10Gx5	IL136-10Sx5	3000	1-8	1	1	3	6	5	1/2
IL136-12Gx5	IL136-12Sx5	3000	1 1/4-7	1 1/4	1	3	6	5	1/2
IL137-6Gx5	IL137-6Sx5	1000	3/8-16	1/2	3/4	4	5-3/4	5	3/16
IL137-7Gx5	IL137-7Sx5	2000	1/2-13	1/2	3/4	4	5-3/4	5	3/16
IL137-8Gx5	IL137-8Sx5	3000	5/8-11	5/8	3/4	4	5-3/4	5	3/16
IL137-9Gx5	IL137-9Sx5	3000	3/4-10	3/4	3/4	4	5-3/4	5	3/16
IL137-10Gx5	IL137-10Sx5	3000	1-8	1	1	4	6	5	1/2
IL137-12Gx5	IL137-12Sx5	3000	1 1/4-7	1-1/4	1	4	6	5	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Swivel Stud Levelers

The IEC Saucer Base® Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

MEDIUM-DUTY LEVELERS

SAUCER BASE® SWIVEL STUD

6" STUD LENGTHS

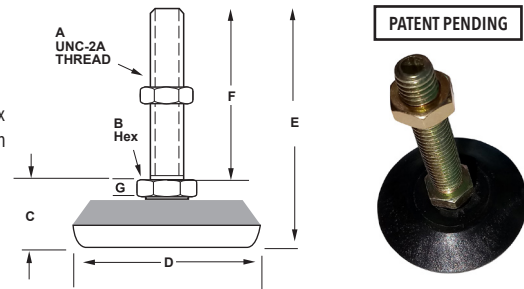

PATENT PENDING


OPTIONAL BASE COLORS



OTHER FINISHES

Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 6" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-6Gx6	IL130-6Sx6	1000	3/8-16	1/2	3/4	3/4	6-3/4	6	3/16
IL130-7Gx6	IL130-7Sx6	2000	1/2-13	1/2	3/4	3/4	6-3/4	6	3/16
IL130-8Gx6	IL130-8Sx6	3000	5/8-11	5/8	3/4	3/4	6-3/4	6	3/16
IL130-9Gx6	IL130-9Sx6	3000	3/4-10	3/4	3/4	3/4	6-3/4	6	3/16
IL130-10Gx6	IL130-10Sx6	3000	1-8	1	1	3/4	7	6	1/2
IL130-12Gx6	IL130-12Sx6	3000	1 1/4-7	1 1/4	1	3/4	7	6	1/2
IL131-6Gx6	IL131-6Sx6	1000	3/8-16	1/2	3/4	1	6-3/4	6	3/16
IL131-7Gx6	IL131-7Sx6	2000	1/2-13	1/2	3/4	1	6-3/4	6	3/16
IL131-8Gx6	IL131-8Sx6	3000	5/8-11	5/8	3/4	1	6-3/4	6	3/16
IL131-9Gx6	IL131-9Sx6	3000	3/4-10	3/4	3/4	1	6-3/4	6	3/16
IL131-10Gx6	IL131-10Sx6	3000	1-8	1	1	1	7	6	1/2
IL131-12Gx6	IL131-12Sx6	3000	1 1/4-7	1 1/4	1	1	7	6	1/2
IL132-6Gx6	IL132-6Sx6	1000	3/8-16	1/2	3/4	1-1/4	6-3/4	6	3/16
IL132-7Gx6	IL132-7Sx6	2000	1/2-13	1/2	3/4	1-1/4	6-3/4	6	3/16
IL132-8Gx6	IL132-8Sx6	3000	5/8-11	5/8	3/4	1-1/4	6-3/4	6	3/16
IL132-9Gx6	IL132-9Sx6	3000	3/4-10	3/4	3/4	1-1/4	6-3/4	6	3/16
IL132-10Gx6	IL132-10Sx6	3000	1-8	1	1	1-1/4	7	6	1/2
IL132-12Gx6	IL132-12Sx6	3000	1 1/4-7	1 1/4	1	1-1/4	7	6	1/2
IL133-6Gx6	IL133-6Sx6	1000	3/8-16	1/2	3/4	1-1/2	6-3/4	6	3/16
IL133-7Gx6	IL133-7Sx6	2000	1/2-13	1/2	3/4	1-1/2	6-3/4	6	3/16
IL133-8Gx6	IL133-8Sx6	3000	5/8-11	5/8	3/4	1-1/2	6-3/4	6	3/16
IL133-9Gx6	IL133-9Sx6	3000	3/4-10	3/4	3/4	1-1/2	6-3/4	6	3/16
IL133-10Gx6	IL133-10Sx6	3000	1-8	1	1	1-1/2	7	6	1/2
IL133-12Gx6	IL133-12Sx6	3000	1 1/4-7	1 1/4	1	1-1/2	7	6	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Swivel Stud Levelers

The IEC *Saucer Base®* Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.


More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



PATENT PENDING



OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 6" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-6Gx6	IL134-6Sx6	1000	3/8-16	1/2	3/4	1-3/4	6-3/4	6	3/16
IL134-7Gx6	IL134-7Sx6	2000	1/2-13	1/2	3/4	1-3/4	6-3/4	6	3/16
IL134-8Gx6	IL134-8Sx6	3000	5/8-11	5/8	3/4	1-3/4	6-3/4	6	3/16
IL134-9Gx6	IL134-9Sx6	3000	3/4-10	3/4	3/4	1-3/4	6-3/4	6	3/16
IL134-10Gx6	IL134-10Sx6	3000	1-8	1	1	1-3/4	7	6	1/2
IL134-12Gx6	IL134-12Sx6	3000	1 1/4-7	1 1/4	1	1-3/4	7	6	1/2
IL135-6Gx6	IL135-6Sx6	1000	3/8-16	1/2	3/4	2	6-3/4	6	3/16
IL135-7Gx6	IL135-7Sx6	2000	1/2-13	1/2	3/4	2	6-3/4	6	3/16
IL135-8Gx6	IL135-8Sx6	3000	5/8-11	5/8	3/4	2	6-3/4	6	3/16
IL135-9Gx6	IL135-9Sx6	3000	3/4-10	3/4	3/4	2	6-3/4	6	3/16
IL135-10Gx6	IL135-10Sx6	3000	1-8	1	1	2	7	6	1/2
IL135-12Gx6	IL135-12Sx6	3000	1 1/4-7	1 1/4	1	2	7	6	1/2
IL136-6Gx6	IL136-6Sx6	1000	3/8-16	1/2	3/4	3	6-3/4	6	3/16
IL136-7Gx6	IL136-7Sx6	2000	1/2-13	1/2	3/4	3	6-3/4	6	3/16
IL136-8Gx6	IL136-8Sx6	3000	5/8-11	5/8	3/4	3	6-3/4	6	3/16
IL136-9Gx6	IL136-9Sx6	3000	3/4-10	3/4	3/4	3	6-3/4	6	3/16
IL136-10Gx6	IL136-10Sx6	3000	1-8	1	1	3	7	6	1/2
IL136-12Gx6	IL136-12Sx6	3000	1 1/4-7	1 1/4	1	3	7	6	1/2
IL137-6Gx6	IL137-6Sx6	1000	3/8-16	1/2	3/4	4	6-3/4	6	3/16
IL137-7Gx6	IL137-7Sx6	2000	1/2-13	1/2	3/4	4	6-3/4	6	3/16
IL137-8Gx6	IL137-8Sx6	3000	5/8-11	5/8	3/4	4	6-3/4	6	3/16
IL137-9Gx6	IL137-9Sx6	3000	3/4-10	3/4	3/4	4	6-3/4	6	3/16
IL137-10Gx6	IL137-10Sx6	3000	1-8	1	1	4	7	6	1/2
IL137-12Gx6	IL137-12Sx6	3000	1 1/4-7	1-1/4	1	4	7	6	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, SAUCER BASE® Swivel Stud Levelers

The IEC Saucer Base® Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.


More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features


- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

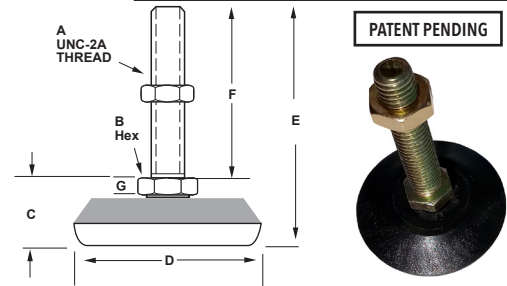MEDIUM-DUTY LEVELERS**SAUCER BASE® SWIVEL STUD****8" STUD LENGTHS****OPTIONAL BASE COLORS****OTHER FINISHES**

Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 8" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-7Gx8	IL130-7Sx8	2000	1/2-13	1/2	3/4	3/4	8-3/4	8	3/16
IL130-8Gx8	IL130-8Sx8	3000	5/8-11	5/8	3/4	3/4	8-3/4	8	3/16
IL130-9Gx8	IL130-9Sx8	3000	3/4-10	3/4	3/4	3/4	8-3/4	8	3/16
IL130-10Gx8	IL130-10Sx8	3000	1-8	1	1	3/4	9	8	1/2
IL130-12Gx8	IL130-12Sx8	3000	1 1/4-7	1 1/4	1	3/4	9	8	1/2
IL131-7Gx8	IL131-7Sx8	2000	1/2-13	1/2	3/4	1	8-3/4	8	3/16
IL131-8Gx8	IL131-8Sx8	3000	5/8-11	5/8	3/4	1	8-3/4	8	3/16
IL131-9Gx8	IL131-9Sx8	3000	3/4-10	3/4	3/4	1	8-3/4	8	3/16
IL131-10Gx8	IL131-10Sx8	3000	1-8	1	1	1	9	8	1/2
IL131-12Gx8	IL131-12Sx8	3000	1 1/4-7	1 1/4	1	1	9	8	1/2
IL132-7Gx8	IL132-7Sx8	2000	1/2-13	1/2	3/4	1-1/4	8-3/4	8	3/16
IL132-8Gx8	IL132-8Sx8	3000	5/8-11	5/8	3/4	1-1/4	8-3/4	8	3/16
IL132-9Gx8	IL132-9Sx8	3000	3/4-10	3/4	3/4	1-1/4	8-3/4	8	3/16
IL132-10Gx8	IL132-10Sx8	3000	1-8	1	1	1-1/4	9	8	1/2
IL132-12Gx8	IL132-12Sx8	3000	1 1/4-7	1 1/4	1	1-1/4	9	8	1/2
IL133-7Gx8	IL133-7Sx8	2000	1/2-13	1/2	3/4	1-1/2	8-3/4	8	3/16
IL133-8Gx8	IL133-8Sx8	3000	5/8-11	5/8	3/4	1-1/2	8-3/4	8	3/16
IL133-9Gx8	IL133-9Sx8	3000	3/4-10	3/4	3/4	1-1/2	8-3/4	8	3/16
IL133-10Gx8	IL133-10Sx8	3000	1-8	1	1	1-1/2	9	8	1/2
IL133-12Gx8	IL133-12Sx8	3000	1 1/4-7	1 1/4	1	1-1/2	9	8	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Swivel Stud Levelers

The IEC *Saucer Base®* Medium Duty Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.


More thread sizes and lengths (including top external hex and slot, and black finish) available for this base style in our Ruggedized Light Duty Glide catalog.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

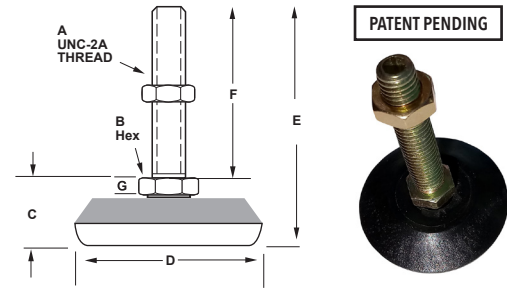

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE SWIVEL — 8" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-7Gx8	IL134-7Sx8	2000	1/2-13	1/2	3/4	1-3/4	8-3/4	8	3/16
IL134-8Gx8	IL134-8Sx8	3000	5/8-11	5/8	3/4	1-3/4	8-3/4	8	3/16
IL134-9Gx8	IL134-9Sx8	3000	3/4-10	3/4	3/4	1-3/4	8-3/4	8	3/16
IL134-10Gx8	IL134-10Sx8	3000	1-8	1	1	1-3/4	9	8	1/2
IL134-12Gx8	IL134-12Sx8	3000	1 1/4-7	1 1/4	1	1-3/4	9	8	1/2
IL135-7Gx8	IL135-7Sx8	2000	1/2-13	1/2	3/4	2	8-3/4	8	3/16
IL135-8Gx8	IL135-8Sx8	3000	5/8-11	5/8	3/4	2	8-3/4	8	3/16
IL135-9Gx8	IL135-9Sx8	3000	3/4-10	3/4	3/4	2	8-3/4	8	3/16
IL135-10Gx8	IL135-10Sx8	3000	1-8	1	1	2	9	8	1/2
IL135-12Gx8	IL135-12Sx8	3000	1 1/4-7	1 1/4	1	2	9	8	1/2
IL136-7Gx8	IL136-7Sx8	2000	1/2-13	1/2	3/4	3	8-3/4	8	3/16
IL136-8Gx8	IL136-8Sx8	3000	5/8-11	5/8	3/4	3	8-3/4	8	3/16
IL136-9Gx8	IL136-9Sx8	3000	3/4-10	3/4	3/4	3	8-3/4	8	3/16
IL136-10Gx8	IL136-10Sx8	3000	1-8	1	1	3	9	8	1/2
IL136-12Gx8	IL136-12Sx8	3000	1 1/4-7	1 1/4	1	3	9	8	1/2
IL137-7Gx8	IL137-7Sx8	2000	1/2-13	1/2	3/4	4	8-3/4	8	3/16
IL137-8Gx8	IL137-8Sx8	3000	5/8-11	5/8	3/4	4	8-3/4	8	3/16
IL137-9Gx8	IL137-9Sx8	3000	3/4-10	3/4	3/4	4	8-3/4	8	3/16
IL137-10Gx8	IL137-10Sx8	3000	1-8	1	1	4	9	8	1/2
IL137-12Gx8	IL137-12Sx8	3000	1 1/4-7	1-1/4	1	4	9	8	1/2

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**SAUCER BASE® METRIC SWIVEL**

1" to 2" STUD LENGTHS

PATENT PENDING

Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers


The IEC Saucer Base® Swivel Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features


- Gold trivalent zinc
 - Top hex drive (add -BR to P/N)
 - Loads to 3000 lbs
 - Corrosion resistant
 - 15 degree swivel
 - 8 base diameters
 - Glass-filled nylon
 - RoHS compliant
 - Curved bottom edge for improved sliding
 - Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

**OPTIONAL BASE COLORS****OTHER FINISHES**

Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 1" to 2" STUDS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M6Gx1	IL130-M6Sx1	100	M6x1	1/2	3/4	3/4	1-3/4	1	3/16
IL130-M6G	IL130-M6S	100	M6x1	1/2	3/4	3/4	2-3/4	2	3/16
IL130-M8Gx1	IL130-M8Sx1	500	M8x1.25	1/2	3/4	3/4	1-3/4	1	3/16
IL130-M8G	IL130-M8S	500	M8x1.25	1/2	3/4	3/4	2-3/4	2	3/16
IL130-M10G	IL130-M10S	1000	M10x1.5	1/2	3/4	3/4	2-3/4	2	3/16
IL130-M12G	IL130-M12S	2000	M12x1.75	1/2	3/4	3/4	2-3/4	2	3/16
IL130-M16G	IL130-M16S	3000	M16x2.00	1/2	3/4	3/4	2-3/4	2	3/16
IL130-M20G	IL130-M20S	3000	M20x2.50	1/2	3/4	3/4	2-3/4	2	3/16
IL131-M6Gx1	IL131-M6Sx1	100	M6x1	1/2	3/4	1	1-3/4	1	3/16
IL131-M6G	IL131-M6S	100	M6x1	1/2	3/4	1	2-3/4	2	3/16
IL131-M8Gx1	IL131-M8Sx1	500	M8x1.25	1/2	3/4	1	1-3/4	1	3/16
IL131-M8G	IL131-M8S	500	M8x1.25	1/2	3/4	1	2-3/4	2	3/16
IL131-M10G	IL131-M10S	1000	M10x1.5	1/2	3/4	1	2-3/4	2	3/16
IL131-M12G	IL131-M12S	2000	M12x1.75	1/2	3/4	1	2-3/4	2	3/16
IL131-M16G	IL131-M16S	3000	M16x2.00	1/2	3/4	1	2-3/4	2	3/16
IL131-M20G	IL131-M20S	3000	M20x2.50	1/2	3/4	1	2-3/4	2	3/16
IL132-M6Gx1	IL132-M6Sx1	100	M6x1	1/2	3/4	1-1/4	1-3/4	1	3/16
IL132-M6G	IL132-M6S	100	M6x1	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-M8Gx1	IL132-M8Sx1	500	M8x1.25	1/2	3/4	1-1/4	1-3/4	1	3/16
IL132-M8G	IL132-M8S	500	M8x1.25	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-M10G	IL132-M10S	1000	M10x1.5	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-M12G	IL132-M12S	2000	M12x1.75	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-M16G	IL132-M16S	3000	M16x2.00	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-M20G	IL132-M20S	3000	M20x2.50	1/2	3/4	1-1/4	2-3/4	2	3/16
IL133-M6Gx1	IL133-M6Sx1	100	M6x1	1/2	3/4	1-1/2	1-3/4	1	3/16
IL133-M6G	IL133-M6S	100	M6x1	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-M8Gx1	IL133-M8Sx1	500	M8x1.25	1/2	3/4	1-1/2	1-3/4	1	3/16
IL133-M8G	IL133-M8S	500	M8x1.25	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-M10G	IL133-M10S	1000	M10x1.5	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-M12G	IL133-M12S	2000	M12x1.75	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-M16G	IL133-M16S	3000	M16x2.00	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-M20G	IL133-M20S	3000	M20x2.50	1/2	3/4	1-1/2	2-3/4	2	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Metric Swivel Levelers


The IEC *Saucer Base® Metric Swivel Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



PATENT PENDING



OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	
		Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 1-3/4" to 4" STUDS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-M6Gx1	IL134-M6Sx1	100	M6x1	1/2	3/4	1-3/4	1-3/4	1	3/16
IL134-M6G	IL134-M6S	100	M6x1	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-M8Gx1	IL134-M8Sx1	500	M8x1.25	1/2	3/4	1-3/4	1-3/4	1	3/16
IL134-M8G	IL134-M8S	500	M8x1.25	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-M10G	IL134-M10S	1000	M10x1.5	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-M12G	IL134-M12S	2000	M12x1.75	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-M16G	IL134-M16S	3000	M16x2.00	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-M20G	IL134-M20S	3000	M20x2.50	1/2	3/4	1-3/4	2-3/4	2	3/16
IL135-M6Gx1	IL135-M6Sx1	100	M6x1	1/2	3/4	2	1-3/4	1	3/16
IL135-M6G	IL135-M6S	100	M6x1	1/2	3/4	2	2-3/4	2	3/16
IL135-M8Gx1	IL135-M8Sx1	500	M8x1.25	1/2	3/4	2	1-3/4	1	3/16
IL135-M8G	IL135-M8S	500	M8x1.25	1/2	3/4	2	2-3/4	2	3/16
IL135-M10G	IL135-M10S	1000	M10x1.5	1/2	3/4	2	2-3/4	2	3/16
IL135-M12G	IL135-M12S	2000	M12x1.75	1/2	3/4	2	2-3/4	2	3/16
IL135-M16G	IL135-M16S	3000	M16x2.00	1/2	3/4	2	2-3/4	2	3/16
IL135-M20G	IL135-M20S	3000	M20x2.50	1/2	3/4	2	2-3/4	2	3/16
IL136-M6Gx1	IL136-M6Sx1	100	M6x1	1/2	3/4	3	1-3/4	1	3/16
IL136-M6G	IL136-M6S	100	M6x1	1/2	3/4	3	2-3/4	2	3/16
IL136-M8Gx1	IL136-M8Sx1	500	M8x1.25	1/2	3/4	3	1-3/4	1	3/16
IL136-M8G	IL136-M8S	500	M8x1.25	1/2	3/4	3	2-3/4	2	3/16
IL136-M10G	IL136-M10S	1000	M10x1.5	1/2	3/4	3	2-3/4	2	3/16
IL136-M12G	IL136-M12S	2000	M12x1.75	1/2	3/4	3	2-3/4	2	3/16
IL136-M16G	IL136-M16S	3000	M16x2.00	1/2	3/4	3	2-3/4	2	3/16
IL136-M20G	IL136-M20S	3000	M20x2.50	1/2	3/4	3	2-3/4	2	3/16
IL137-M6Gx1	IL137-M6Sx1	100	M6x1	1/2	3/4	4	1-3/4	1	3/16
IL137-M6G	IL137-M6S	100	M6x1	1/2	3/4	4	2-3/4	2	3/16
IL137-M8Gx1	IL137-M8Sx1	500	M8x1.25	1/2	3/4	4	1-3/4	1	3/16
IL137-M8G	IL137-M8S	500	M8x1.25	1/2	3/4	4	2-3/4	2	3/16
IL137-M10G	IL137-M10S	1000	M10x1.5	1/2	3/4	4	2-3/4	2	3/16
IL137-M12G	IL137-M12S	2000	M12x1.75	1/2	3/4	4	2-3/4	2	3/16
IL137-M16G	IL137-M16S	3000	M16x2.00	1/2	3/4	4	2-3/4	2	3/16
IL137-M20G	IL137-M20S	3000	M20x2.50	1/2	3/4	4	2-3/4	2	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers

The IEC Saucer Base® Swivel Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features


- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

MEDIUM-DUTY LEVELERS**SAUCER BASE® METRIC SWIVEL**

3" STUD LENGTHS

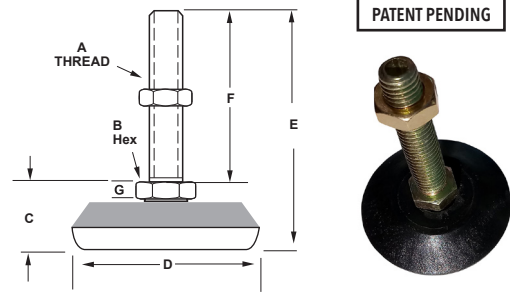**OPTIONAL BASE COLORS****OTHER FINISHES**

Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 3" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M6Gx3	IL130-M6Sx3	100	M6x1	1/2	3/4	3/4	3-3/4	3	3/16
IL130-M8Gx3	IL130-M8Sx3	500	M8x1.25	1/2	3/4	3/4	3-3/4	3	3/16
IL130-M10Gx3	IL130-M10Sx3	1000	M10x1.50	1/2	3/4	3/4	3-3/4	3	3/16
IL130-M12Gx3	IL130-M12Sx3	2000	M12x1.75	1/2	3/4	3/4	3-3/4	3	3/16
IL130-M16Gx3	IL130-M16Sx3	3000	M16x2.00	5/8	3/4	3/4	3-3/4	3	3/16
IL130-M20Gx3	IL130-M20Sx3	3000	M20x2.50	3/4	3/4	3/4	3-3/4	3	3/16
IL131-M6Gx3	IL131-M6Sx3	100	M6x1	1/2	3/4	1	3-3/4	3	3/16
IL131-M8Gx3	IL131-M8Sx3	500	M8x1.25	1/2	3/4	1	3-3/4	3	3/16
IL131-M10Gx3	IL131-M10Sx3	1000	M10x1.50	1/2	3/4	1	3-3/4	3	3/16
IL131-M12Gx3	IL131-M12Sx3	2000	M12x1.75	1/2	3/4	1	3-3/4	3	3/16
IL131-M16Gx3	IL131-M16Sx3	3000	M16x2.00	5/8	3/4	1	3-3/4	3	3/16
IL131-M20Gx3	IL131-M20Sx3	3000	M20x2.50	3/4	3/4	1	3-3/4	3	3/16
IL132-M6Gx3	IL132-M6Sx3	100	M6x1	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-M8Gx3	IL132-M8Sx3	500	M8x1.25	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-M10Gx3	IL132-M10Sx3	1000	M10x1.50	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-M12Gx3	IL132-M12Sx3	2000	M12x1.75	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-M16Gx3	IL132-M16Sx3	3000	M16x2.00	5/8	3/4	1-1/4	3-3/4	3	3/16
IL132-M20Gx3	IL132-M20Sx3	3000	M20x2.50	3/4	3/4	1-1/4	3-3/4	3	3/16
IL133-M6Gx3	IL133-M6Sx3	100	M6x1	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-M8Gx3	IL133-M8Sx3	500	M8x1.25	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-M10Gx3	IL133-M10Sx3	1000	M10x1.50	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-M12Gx3	IL133-M12Sx3	2000	M12x1.75	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-M16Gx3	IL133-M16Sx3	3000	M16x2.00	5/8	3/4	1-1/2	3-3/4	3	3/16
IL133-M20Gx3	IL133-M20Sx3	3000	M20x2.50	3/4	3/4	1-1/2	3-3/4	3	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Metric Swivel Levelers


The IEC *Saucer Base® Metric Swivel Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

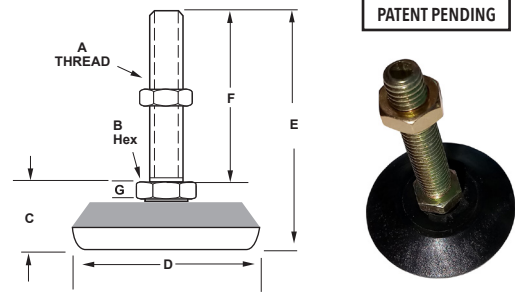

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	
		Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 3" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-M6Gx3	IL134-M6Sx3	100	M6x1	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-M8Gx3	IL134-M8Sx3	500	M8x1.25	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-M10Gx3	IL134-M10Sx3	1000	M10x1.50	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-M12Gx3	IL134-M12Sx3	2000	M12x1.75	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-M16Gx3	IL134-M16Sx3	3000	M16x2.00	5/8	3/4	1-3/4	3-3/4	3	3/16
IL134-M20Gx3	IL134-M20Sx3	3000	M20x2.50	3/4	3/4	1-3/4	3-3/4	3	3/16
IL135-M6Gx3	IL135-M6Sx3	100	M6x1	1/2	3/4	2	3-3/4	3	3/16
IL135-M8Gx3	IL135-M8Sx3	500	M8x1.25	1/2	3/4	2	3-3/4	3	3/16
IL135-M10Gx3	IL135-M10Sx3	1000	M10x1.50	1/2	3/4	2	3-3/4	3	3/16
IL135-M12Gx3	IL135-M12Sx3	2000	M12x1.75	1/2	3/4	2	3-3/4	3	3/16
IL135-M16Gx3	IL135-M16Sx3	3000	M16x2.00	5/8	3/4	2	3-3/4	3	3/16
IL135-M20Gx3	IL135-M20Sx3	3000	M20x2.50	3/4	3/4	2	3-3/4	3	3/16
IL136-M6Gx3	IL136-M6Sx3	100	M6x1	1/2	3/4	3	3-3/4	3	3/16
IL136-M8Gx3	IL136-M8Sx3	500	M8x1.25	1/2	3/4	3	3-3/4	3	3/16
IL136-M10Gx3	IL136-M10Sx3	1000	M10x1.50	1/2	3/4	3	3-3/4	3	3/16
IL136-M12Gx3	IL136-M12Sx3	2000	M12x1.75	1/2	3/4	3	3-3/4	3	3/16
IL136-M16Gx3	IL136-M16Sx3	3000	M16x2.00	5/8	3/4	3	3-3/4	3	3/16
IL136-M20Gx3	IL136-M20Sx3	3000	M20x2.50	3/4	3/4	3	3-3/4	3	3/16
IL137-M6Gx3	IL137-M6Sx3	100	M6x1	1/2	3/4	4	3-3/4	3	3/16
IL137-M8Gx3	IL137-M8Sx3	500	M8x1.25	1/2	3/4	4	3-3/4	3	3/16
IL137-M10Gx3	IL137-M10Sx3	1000	M10x1.50	1/2	3/4	4	3-3/4	3	3/16
IL137-M12Gx3	IL137-M12Sx3	2000	M12x1.75	1/2	3/4	4	3-3/4	3	3/16
IL137-M16Gx3	IL137-M16Sx3	3000	M16x2.00	5/8	3/4	4	3-3/4	3	3/16
IL137-M20Gx3	IL137-M20Sx3	3000	M20x2.50	3/4	3/4	4	3-3/4	3	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Metric Swivel Levelers

The IEC *Saucer Base® Swivel Metric Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
 - Top hex drive (add -BR to P/N)
 - Loads to 3000 lbs
 - Corrosion resistant
 - 15 degree swivel
 - 8 base diameters
 - Glass-filled nylon
 - RoHS compliant
 - Curved bottom edge for improved sliding
 - Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

MEDIUM-DUTY LEVELERS

SAUCER BASE® METRIC SWIVEL

4" STUD LENGTHS

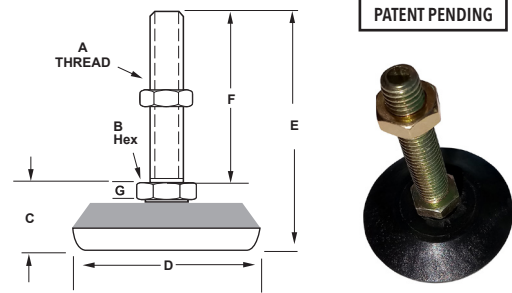


OPTIONAL BASE COLORS



OTHER FINISHES

Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 4" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M8Gx4	IL130-M8Sx4	500	M8x1.25	1/2	3/4	3/4	4-3/4	4	3/16
IL130-M10Gx4	IL130-M10Sx4	1000	M10x1.50	1/2	3/4	3/4	4-3/4	4	3/16
IL130-M12Gx4	IL130-M12Sx4	2000	M12x1.75	1/2	3/4	3/4	4-3/4	4	3/16
IL130-M16Gx4	IL130-M16Sx4	3000	M16x2.00	5/8	3/4	3/4	4-3/4	4	3/16
IL130-M20Gx4	IL130-M20Sx4	3000	M20x2.50	3/4	3/4	3/4	4-3/4	4	3/16
IL131-M8Gx4	IL131-M8Sx4	500	M8x1.25	1/2	3/4	1	4-3/4	4	3/16
IL131-M10Gx4	IL131-M10Sx4	1000	M10x1.50	1/2	3/4	1	4-3/4	4	3/16
IL131-M12Gx4	IL131-M12Sx4	2000	M12x1.75	1/2	3/4	1	4-3/4	4	3/16
IL131-M16Gx4	IL131-M16Sx4	3000	M16x2.00	5/8	3/4	1	4-3/4	4	3/16
IL131-M20Gx4	IL131-M20Sx4	3000	M20x2.50	3/4	3/4	1	4-3/4	4	3/16
IL132-M8Gx4	IL132-M8Sx4	500	M8x1.25	1/2	3/4	1-1/4	4-3/4	4	3/16
IL132-M10Gx4	IL132-M10Sx4	1000	M10x1.50	1/2	3/4	1-1/4	4-3/4	4	3/16
IL132-M12Gx4	IL132-M12Sx4	2000	M12x1.75	1/2	3/4	1-1/4	4-3/4	4	3/16
IL132-M16Gx4	IL132-M16Sx4	3000	M16x2.00	5/8	3/4	1-1/4	4-3/4	4	3/16
IL132-M20Gx4	IL132-M20Sx4	3000	M20x2.50	3/4	3/4	1-1/4	4-3/4	4	3/16
IL133-M8Gx4	IL133-M8Sx4	500	M8x1.25	1/2	3/4	1-1/2	4-3/4	4	3/16
IL133-M10Gx4	IL133-M10Sx4	1000	M10x1.50	1/2	3/4	1-1/2	4-3/4	4	3/16
IL133-M12Gx4	IL133-M12Sx4	2000	M12x1.75	1/2	3/4	1-1/2	4-3/4	4	3/16
IL133-M16Gx4	IL133-M16Sx4	3000	M16x2.00	5/8	3/4	1-1/2	4-3/4	4	3/16
IL133-M20Gx4	IL133-M20Sx4	3000	M20x2.50	3/4	3/4	1-1/2	4-3/4	4	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers

The IEC Saucer Base® Metric Swivel Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features


- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

MEDIUM-DUTY LEVELERS**SAUCER BASE® METRIC SWIVEL****4" STUD LENGTHS**

PATENT PENDING

**OPTIONAL BASE COLORS****OTHER FINISHES**

Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 4" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-M8Gx4	IL134-M8Sx4	500	M8x1.25	1/2	3/4	1-3/4	4-3/4	4	3/16
IL134-M10Gx4	IL134-M10Sx4	1000	M10x1.50	1/2	3/4	1-3/4	4-3/4	4	3/16
IL134-M12Gx4	IL134-M12Sx4	2000	M12x1.75	1/2	3/4	1-3/4	4-3/4	4	3/16
IL134-M16Gx4	IL134-M16Sx4	3000	M16x2.00	5/8	3/4	1-3/4	4-3/4	4	3/16
IL134-M20Gx4	IL134-M20Sx4	3000	M20x2.50	3/4	3/4	1-3/4	4-3/4	4	3/16
IL135-M8Gx4	IL135-M8Sx4	500	M8x1.25	1/2	3/4	2	4-3/4	4	3/16
IL135-M10Gx4	IL135-M10Sx4	1000	M10x1.50	1/2	3/4	2	4-3/4	4	3/16
IL135-M12Gx4	IL135-M12Sx4	2000	M12x1.75	1/2	3/4	2	4-3/4	4	3/16
IL135-M16Gx4	IL135-M16Sx4	3000	M16x2.00	5/8	3/4	2	4-3/4	4	3/16
IL135-M20Gx4	IL135-M20Sx4	3000	M20x2.50	3/4	3/4	2	4-3/4	4	3/16
IL136-M8Gx4	IL136-M8Sx4	500	M8x1.25	1/2	3/4	3	4-3/4	4	3/16
IL136-M10Gx4	IL136-M10Sx4	1000	M10x1.50	1/2	3/4	3	4-3/4	4	3/16
IL136-M12Gx4	IL136-M12Sx4	2000	M12x1.75	1/2	3/4	3	4-3/4	4	3/16
IL136-M16Gx4	IL136-M16Sx4	3000	M16x2.00	5/8	3/4	3	4-3/4	4	3/16
IL136-M20Gx4	IL136-M20Sx4	3000	M20x2.50	3/4	3/4	3	4-3/4	4	3/16
IL137-M8Gx4	IL137-M8Sx4	500	M8x1.25	1/2	3/4	4	4-3/4	4	3/16
IL137-M10Gx4	IL137-M10Sx4	1000	M10x1.50	1/2	3/4	4	4-3/4	4	3/16
IL137-M12Gx4	IL137-M12Sx4	2000	M12x1.75	1/2	3/4	4	4-3/4	4	3/16
IL137-M16Gx4	IL137-M16Sx4	3000	M16x2.00	5/8	3/4	4	4-3/4	4	3/16
IL137-M20Gx4	IL137-M20Sx4	3000	M20x2.50	3/4	3/4	4	4-3/4	4	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Metric Swivel Levelers


The IEC *Saucer Base® Swivel Metric Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

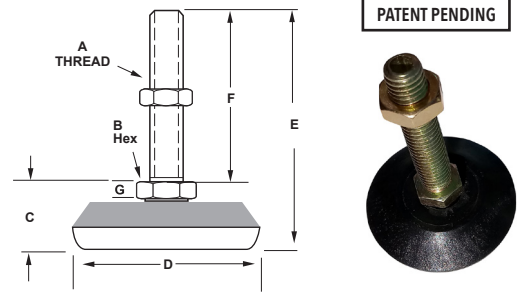

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 5" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M8Gx5	IL130-M8Sx5	500	M8x1.25	1/2	3/4	3/4	5-3/4	5	3/16
IL130-M10Gx5	IL130-M10Sx5	1000	M10x1.50	1/2	3/4	3/4	5-3/4	5	3/16
IL130-M12Gx5	IL130-M12Sx5	2000	M12x1.75	1/2	3/4	3/4	5-3/4	5	3/16
IL130-M16Gx5	IL130-M16Sx5	3000	M16x2.00	5/8	3/4	3/4	5-3/4	5	3/16
IL130-M20Gx5	IL130-M20Sx5	3000	M20x2.50	3/4	3/4	3/4	5-3/4	5	3/16
IL131-M8Gx5	IL131-M8Sx5	500	M8x1.25	1/2	3/4	1	5-3/4	5	3/16
IL131-M10Gx5	IL131-M10Sx5	1000	M10x1.50	1/2	3/4	1	5-3/4	5	3/16
IL131-M12Gx5	IL131-M12Sx5	2000	M12x1.75	1/2	3/4	1	5-3/4	5	3/16
IL131-M16Gx5	IL131-M16Sx5	3000	M16x2.00	5/8	3/4	1	5-3/4	5	3/16
IL131-M20Gx5	IL131-M20Sx5	3000	M20x2.50	3/4	3/4	1	5-3/4	5	3/16
IL132-M8Gx5	IL132-M8Sx5	500	M8x1.25	1/2	3/4	1-1/4	5-3/4	5	3/16
IL132-M10Gx5	IL132-M10Sx5	1000	M10x1.50	1/2	3/4	1-1/4	5-3/4	5	3/16
IL132-M12Gx5	IL132-M12Sx5	2000	M12x1.75	1/2	3/4	1-1/4	5-3/4	5	3/16
IL132-M16Gx5	IL132-M16Sx5	3000	M16x2.00	5/8	3/4	1-1/4	5-3/4	5	3/16
IL132-M20Gx5	IL132-M20Sx5	3000	M20x2.50	3/4	3/4	1-1/4	5-3/4	5	3/16
IL133-M8Gx5	IL133-M8Sx5	500	M8x1.25	1/2	3/4	1-1/2	5-3/4	5	3/16
IL133-M10Gx5	IL133-M10Sx5	1000	M10x1.50	1/2	3/4	1-1/2	5-3/4	5	3/16
IL133-M12Gx5	IL133-M12Sx5	2000	M12x1.75	1/2	3/4	1-1/2	5-3/4	5	3/16
IL133-M16Gx5	IL133-M16Sx5	3000	M16x2.00	5/8	3/4	1-1/2	5-3/4	5	3/16
IL133-M20Gx5	IL133-M20Sx5	3000	M20x2.50	3/4	3/4	1-1/2	5-3/4	5	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Metric Swivel Levelers

The IEC *Saucer Base® Metric Swivel Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

MEDIUM-DUTY LEVELERS

SAUCER BASE® METRIC SWIVEL

5" STUD LENGTHS

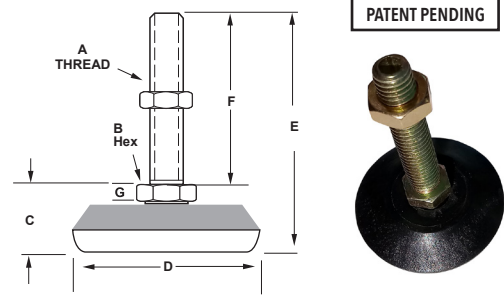


OPTIONAL BASE COLORS



OTHER FINISHES

Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 5" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-M8Gx5	IL134-M8Sx5	500	M8x1.25	1/2	3/4	1-3/4	5-3/4	5	3/16
IL134-M10Gx5	IL134-M10Sx5	1000	M10x1.50	1/2	3/4	1-3/4	5-3/4	5	3/16
IL134-M12Gx5	IL134-M12Sx5	2000	M12x1.75	1/2	3/4	1-3/4	5-3/4	5	3/16
IL134-M16Gx5	IL134-M16Sx5	3000	M16x2.00	5/8	3/4	1-3/4	5-3/4	5	3/16
IL134-M20Gx5	IL134-M20Sx5	3000	M20x2.50	3/4	3/4	1-3/4	5-3/4	5	3/16
IL135-M8Gx5	IL135-M8Sx5	500	M8x1.25	1/2	3/4	2	5-3/4	5	3/16
IL135-M10Gx5	IL135-M10Sx5	1000	M10x1.50	1/2	3/4	2	5-3/4	5	3/16
IL135-M12Gx5	IL135-M12Sx5	2000	M12x1.75	1/2	3/4	2	5-3/4	5	3/16
IL135-M16Gx5	IL135-M16Sx5	3000	M16x2.00	5/8	3/4	2	5-3/4	5	3/16
IL135-M20Gx5	IL135-M20Sx5	3000	M20x2.50	3/4	3/4	2	5-3/4	5	3/16
IL136-M8Gx5	IL136-M8Sx5	500	M8x1.25	1/2	3/4	3	5-3/4	5	3/16
IL136-M10Gx5	IL136-M10Sx5	1000	M10x1.50	1/2	3/4	3	5-3/4	5	3/16
IL136-M12Gx5	IL136-M12Sx5	2000	M12x1.75	1/2	3/4	3	5-3/4	5	3/16
IL136-M16Gx5	IL136-M16Sx5	3000	M16x2.00	5/8	3/4	3	5-3/4	5	3/16
IL136-M20Gx5	IL136-M20Sx5	3000	M20x2.50	3/4	3/4	3	5-3/4	5	3/16
IL137-M8Gx5	IL137-M8Sx5	500	M8x1.25	1/2	3/4	4	5-3/4	5	3/16
IL137-M10Gx5	IL137-M10Sx5	1000	M10x1.50	1/2	3/4	4	5-3/4	5	3/16
IL137-M12Gx5	IL137-M12Sx5	2000	M12x1.75	1/2	3/4	4	5-3/4	5	3/16
IL137-M16Gx5	IL137-M16Sx5	3000	M16x2.00	5/8	3/4	4	5-3/4	5	3/16
IL137-M20Gx5	IL137-M20Sx5	3000	M20x2.50	3/4	3/4	4	5-3/4	5	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers


The IEC Saucer Base® Swivel Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



PATENT PENDING

**OPTIONAL BASE COLORS****OTHER FINISHES**

Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 6" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M8Gx6	IL130-M8Sx6	500	M8x1.25	1/2	3/4	3/4	6-3/4	6	3/16
IL130-M10Gx6	IL130-M10Sx6	1000	M10x1.50	1/2	3/4	3/4	6-3/4	6	3/16
IL130-M12Gx6	IL130-M12Sx6	2000	M12x1.75	1/2	3/4	3/4	6-3/4	6	3/16
IL130-M16Gx6	IL130-M16Sx6	3000	M16x2.00	5/8	3/4	3/4	6-3/4	6	3/16
IL130-M20Gx6	IL130-M20Sx6	3000	M20x2.50	3/4	3/4	3/4	6-3/4	6	3/16
IL131-M8Gx6	IL131-M8Sx6	500	M8x1.25	1/2	3/4	1	6-3/4	6	3/16
IL131-M10Gx6	IL131-M10Sx6	1000	M10x1.50	1/2	3/4	1	6-3/4	6	3/16
IL131-M12Gx6	IL131-M12Sx6	2000	M12x1.75	1/2	3/4	1	6-3/4	6	3/16
IL131-M16Gx6	IL131-M16Sx6	3000	M16x2.00	5/8	3/4	1	6-3/4	6	3/16
IL131-M20Gx6	IL131-M20Sx6	3000	M20x2.50	3/4	3/4	1	6-3/4	6	3/16
IL132-M8Gx6	IL132-M8Sx6	500	M8x1.25	1/2	3/4	1-1/4	6-3/4	6	3/16
IL132-M10Gx6	IL132-M10Sx6	1000	M10x1.50	1/2	3/4	1-1/4	6-3/4	6	3/16
IL132-M12Gx6	IL132-M12Sx6	2000	M12x1.75	1/2	3/4	1-1/4	6-3/4	6	3/16
IL132-M16Gx6	IL132-M16Sx6	3000	M16x2.00	5/8	3/4	1-1/4	6-3/4	6	3/16
IL132-M20Gx6	IL132-M20Sx6	3000	M20x2.50	3/4	3/4	1-1/4	6-3/4	6	3/16
IL133-M8Gx6	IL133-M8Sx6	500	M8x1.25	1/2	3/4	1-1/2	6-3/4	6	3/16
IL133-M10Gx6	IL133-M10Sx6	1000	M10x1.50	1/2	3/4	1-1/2	6-3/4	6	3/16
IL133-M12Gx6	IL133-M12Sx6	2000	M12x1.75	1/2	3/4	1-1/2	6-3/4	6	3/16
IL133-M16Gx6	IL133-M16Sx6	3000	M16x2.00	5/8	3/4	1-1/2	6-3/4	6	3/16
IL133-M20Gx6	IL133-M20Sx6	3000	M20x2.50	3/4	3/4	1-1/2	6-3/4	6	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, **SAUCER BASE®** Metric Swivel Levelers


The IEC *Saucer Base® Metric Swivel Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



PATENT PENDING



OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 6" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-M8Gx6	IL134-M8Sx6	500	M8x1.25	1/2	3/4	1-3/4	6-3/4	6	3/16
IL134-M10Gx6	IL134-M10Sx6	1000	M10x1.50	1/2	3/4	1-3/4	6-3/4	6	3/16
IL134-M12Gx6	IL134-M12Sx6	2000	M12x1.75	1/2	3/4	1-3/4	6-3/4	6	3/16
IL134-M16Gx6	IL134-M16Sx6	3000	M16x2.00	5/8	3/4	1-3/4	6-3/4	6	3/16
IL134-M20Gx6	IL134-M20Sx6	3000	M20x2.50	3/4	3/4	1-3/4	6-3/4	6	3/16
IL135-M8Gx6	IL135-M8Sx6	500	M8x1.25	1/2	3/4	2	6-3/4	6	3/16
IL135-M10Gx6	IL135-M10Sx6	1000	M10x1.50	1/2	3/4	2	6-3/4	6	3/16
IL135-M12Gx6	IL135-M12Sx6	2000	M12x1.75	1/2	3/4	2	6-3/4	6	3/16
IL135-M16Gx6	IL135-M16Sx6	3000	M16x2.00	5/8	3/4	2	6-3/4	6	3/16
IL135-M20Gx6	IL135-M20Sx6	3000	M20x2.50	3/4	3/4	2	6-3/4	6	3/16
IL136-M8Gx6	IL136-M8Sx6	500	M8x1.25	1/2	3/4	3	6-3/4	6	3/16
IL136-M10Gx6	IL136-M10Sx6	1000	M10x1.50	1/2	3/4	3	6-3/4	6	3/16
IL136-M12Gx6	IL136-M12Sx6	2000	M12x1.75	1/2	3/4	3	6-3/4	6	3/16
IL136-M16Gx6	IL136-M16Sx6	3000	M16x2.00	5/8	3/4	3	6-3/4	6	3/16
IL136-M20Gx6	IL136-M20Sx6	3000	M20x2.50	3/4	3/4	3	6-3/4	6	3/16
IL137-M8Gx6	IL137-M8Sx6	500	M8x1.25	1/2	3/4	4	6-3/4	6	3/16
IL137-M10Gx6	IL137-M10Sx6	1000	M10x1.50	1/2	3/4	4	6-3/4	6	3/16
IL137-M12Gx6	IL137-M12Sx6	2000	M12x1.75	1/2	3/4	4	6-3/4	6	3/16
IL137-M16Gx6	IL137-M16Sx6	3000	M16x2.00	5/8	3/4	4	6-3/4	6	3/16
IL137-M20Gx6	IL137-M20Sx6	3000	M20x2.50	3/4	3/4	4	6-3/4	6	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers


The IEC Saucer Base® Swivel Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

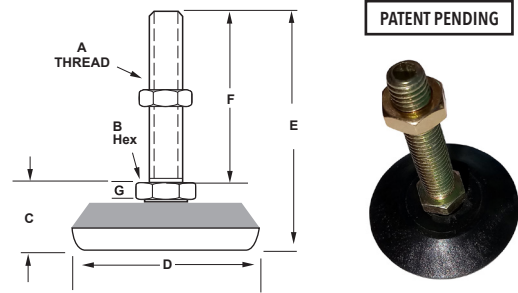

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 8" STUD LENGTHS (3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M12Gx8	IL130-M12Sx8	2000	M12x1.75	1/2	3/4	3/4	8-3/4	8	3/16
IL130-M16Gx8	IL130-M16Sx8	3000	M16x2.00	5/8	3/4	3/4	8-3/4	8	3/16
IL130-M20Gx8	IL130-M20Sx8	3000	M20x2.50	3/4	3/4	3/4	8-3/4	8	3/16
IL131-M12Gx8	IL131-M12Sx8	2000	M12x1.75	1/2	3/4	1	8-3/4	8	3/16
IL131-M16Gx8	IL131-M16Sx8	3000	M16x2.00	5/8	3/4	1	8-3/4	8	3/16
IL131-M20Gx8	IL131-M20Sx8	3000	M20x2.50	3/4	3/4	1	8-3/4	8	3/16
IL132-M12Gx8	IL132-M12Sx8	2000	M12x1.75	1/2	3/4	1-1/4	8-3/4	8	3/16
IL132-M16Gx8	IL132-M16Sx8	3000	M16x2.00	5/8	3/4	1-1/4	8-3/4	8	3/16
IL132-M20Gx8	IL132-M20Sx8	3000	M20x2.50	3/4	3/4	1-1/4	8-3/4	8	3/16
IL133-M12Gx8	IL133-M12Sx8	2000	M12x1.75	1/2	3/4	1-1/2	8-3/4	8	3/16
IL133-M16Gx8	IL133-M16Sx8	3000	M16x2.00	5/8	3/4	1-1/2	8-3/4	8	3/16
IL133-M20Gx8	IL133-M20Sx8	3000	M20x2.50	3/4	3/4	1-1/2	8-3/4	8	3/16
IL134-M12Gx8	IL134-M12Sx8	2000	M12x1.75	1/2	3/4	1-3/4	8-3/4	8	3/16
IL134-M16Gx8	IL134-M16Sx8	3000	M16x2.00	5/8	3/4	1-3/4	8-3/4	8	3/16
IL134-M20Gx8	IL134-M20Sx8	3000	M20x2.50	3/4	3/4	1-3/4	8-3/4	8	3/16
IL135-M12Gx8	IL135-M12Sx8	2000	M12x1.75	1/2	3/4	2	8-3/4	8	3/16
IL135-M16Gx8	IL135-M16Sx8	3000	M16x2.00	5/8	3/4	2	8-3/4	8	3/16
IL135-M20Gx8	IL135-M20Sx8	3000	M20x2.50	3/4	3/4	2	8-3/4	8	3/16
IL136-M12Gx8	IL136-M12Sx8	2000	M12x1.75	1/2	3/4	3	8-3/4	8	3/16
IL136-M16Gx8	IL136-M16Sx8	3000	M16x2.00	5/8	3/4	3	8-3/4	8	3/16
IL136-M20Gx8	IL136-M20Sx8	3000	M20x2.50	3/4	3/4	3	8-3/4	8	3/16
IL137-M12Gx8	IL137-M12Sx8	2000	M12x1.75	1/2	3/4	4	8-3/4	8	3/16
IL137-M16Gx8	IL137-M16Sx8	3000	M16x2.00	5/8	3/4	4	8-3/4	8	3/16
IL137-M20Gx8	IL137-M20Sx8	3000	M20x2.50	3/4	3/4	4	8-3/4	8	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



NOTES

63

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**SAUCER BASE® FIXED SOCKET****Medium Duty Low-Profile, SAUCER BASE® Fixed Socket Levelers**

The IEC Saucer Base® Fixed Socket Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a bottom hex drive molded into the base. Steel socket and washer have clear zinc plating.


Features

- Loads to 3000 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables

**OPTIONAL BASE COLORS****LOW PROFILE FIXED — SOCKET LEVELERS**

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL120-4B-T	IL120-4BS-T	100	1/4-20	1/2	3/4	1/4	3/4	1/4
IL120-5B-T	IL120-5BS-T	500	5/16-18	1/2	3/4	3/8	7/8	1/4
IL120-6B-T	IL120-6BS-T	1000	3/8-16	1/2	3/4	1/2	1	3/8
IL120-7B-T	IL120-7BS-T	2000	1/2-13	5/8	3/4	1/2	1	3/8
IL120-8B-T	IL120-8BS-T	3000	5/8-11	3/4	3/4	5/8	1-1/8	1/2
IL120-9B-T	IL120-9BS-T	3000	3/4-10	1	3/4	3/4	1-1/4	5/8
IL121-4B-T	IL121-4BS-T	100	1/4-20	1/2	1	1/4	3/4	1/4
IL121-5B-T	IL121-5BS-T	500	5/16-18	1/2	1	3/8	7/8	1/4
IL121-6B-T	IL121-6BS-T	1000	3/8-16	1/2	1	1/2	1	3/8
IL121-7B-T	IL121-7BS-T	2000	1/2-13	5/8	1	1/2	1	3/8
IL121-8B-T	IL121-8BS-T	3000	5/8-11	3/4	1	5/8	1-1/8	1/2
IL121-9B-T	IL121-9BS-T	3000	3/4-10	1	1	3/4	1-1/4	5/8
IL122-4B-T	IL122-4BS-T	100	1/4-20	1/2	1-1/4	1/4	3/4	1/4
IL122-5B-T	IL122-5BS-T	500	5/16-18	1/2	1-1/4	3/8	7/8	1/4
IL122-6B-T	IL122-6BS-T	1000	3/8-16	1/2	1-1/4	1/2	1	3/8
IL122-7B-T	IL122-7BS-T	2000	1/2-13	5/8	1-1/4	1/2	1	3/8
IL122-8B-T	IL122-8BS-T	3000	5/8-11	3/4	1-1/4	5/8	1-1/8	1/2
IL122-9B-T	IL122-9BS-T	3000	3/4-10	1	1-1/4	3/4	1-1/4	5/8
IL123-4B-T	IL123-4BS-T	100	1/4-20	1/2	1-1/2	1/4	3/4	1/4
IL123-5B-T	IL123-5BS-T	500	5/16-18	1/2	1-1/2	3/8	7/8	1/4
IL123-6B-T	IL123-6BS-T	1000	3/8-16	1/2	1-1/2	1/2	1	3/8
IL123-7B-T	IL123-7BS-T	2000	1/2-13	5/8	1-1/2	1/2	1	3/8
IL123-8B-T	IL123-8BS-T	3000	5/8-11	3/4	1-1/2	5/8	1-1/8	1/2
IL123-9B-T	IL123-9BS-T	3000	3/4-10	1	1-1/2	3/4	1-1/4	5/8
IL124-4B-T	IL124-4BS-T	100	1/4-20	1/2	1-3/4	1/4	3/4	1/4
IL124-5B-T	IL124-5BS-T	500	5/16-18	1/2	1-3/4	3/8	7/8	1/4
IL124-6B-T	IL124-6BS-T	1000	3/8-16	1/2	1-3/4	1/2	1	3/8
IL124-7B-T	IL124-7BS-T	2000	1/2-13	5/8	1-3/4	1/2	1	3/8
IL124-8B-T	IL124-8BS-T	3000	5/8-11	3/4	1-3/4	5/8	1-1/8	1/2
IL124-9B-T	IL124-9BS-T	3000	3/4-10	1	1-3/4	3/4	1-1/4	5/8
IL125-4B-T	IL125-4BS-T	100	1/4-20	1/2	2	1/4	3/4	1/4
IL125-5B-T	IL125-5BS-T	500	5/16-18	1/2	2	3/8	7/8	1/4
IL125-6B-T	IL125-6BS-T	1000	3/8-16	1/2	2	1/2	1	3/8
IL125-7B-T	IL125-7BS-T	2000	1/2-13	5/8	2	1/2	1	3/8
IL125-8B-T	IL125-8BS-T	3000	5/8-11	3/4	2	5/8	1-1/8	1/2
IL125-9B-T	IL125-9BS-T	3000	3/4-10	1	2	3/4	1-1/4	5/8
IL126-4B-T	IL126-4BS-T	100	1/4-20	1/2	3	1/4	3/4	1/4
IL126-5B-T	IL126-5BS-T	500	5/16-18	1/2	3	3/8	7/8	1/4
IL126-6B-T	IL126-6BS-T	1000	3/8-16	1/2	3	1/2	1	3/8
IL126-7B-T	IL126-7BS-T	2000	1/2-13	5/8	3	1/2	1	3/8
IL126-8B-T	IL126-8BS-T	3000	5/8-11	3/4	3	5/8	1-1/8	1/2
IL126-9B-T	IL126-9BS-T	3000	3/4-10	1	3	3/4	1-1/4	5/8
IL127-4B-T	IL127-4BS-T	100	1/4-20	1/2	4	1/4	3/4	1/4
IL127-5B-T	IL127-5BS-T	500	5/16-18	1/2	4	3/8	7/8	1/4
IL127-6B-T	IL127-6BS-T	1000	3/8-16	1/2	4	1/2	1	3/8
IL127-7B-T	IL127-7BS-T	2000	1/2-13	5/8	4	1/2	1	3/8
IL127-8B-T	IL127-8BS-T	3000	5/8-11	3/4	4	5/8	1-1/8	1/2
IL127-9B-T	IL127-9BS-T	3000	3/4-10	1	4	3/4	1-1/4	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

SAUCER BASE® FIXED SOCKET—METRIC

Medium Duty Low-Profile, **SAUCER BASE®** Fixed Socket Metric Levelers

The IEC *Saucer Base® Metric Fixed Socket Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a bottom hex drive molded into the base. Steel socket and washer have clear zinc plating.


Features

- Loads to 3000 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Conveyors
- Machinery
- Work tables

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures



OPTIONAL BASE COLORS



LOW PROFILE FIXED — METRIC SOCKET LEVELERS

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL120-M6B-T	IL120-M6BS-T	100	M6x1.0	1/2	3/4	1/4	3/4	1/4
IL120-M8B-T	IL120-M8BS-T	500	M8x1.25	1/2	3/4	3/8	7/8	1/4
IL120-M10B-T	IL120-M10BS-T	1000	M10x1.50	1/2	3/4	1/2	1	3/8
IL120-M12B-T	IL120-M12BS-T	2000	M12x1.75	5/8	3/4	1/2	1	3/8
IL120-M16B-T	IL120-M16BS-T	2500	M16x2.0	3/4	3/4	5/8	1-1/8	1/2
IL120-M20B-T	IL120-M20BS-T	3000	M20x2.5	1	3/4	3/4	1-1/4	5/8
IL121-M6B-T	IL121-M6BS-T	100	M6x1.0	1/2	1	1/4	3/4	1/4
IL121-M8B-T	IL121-M8BS-T	500	M8x1.25	1/2	1	3/8	7/8	1/4
IL121-M10B-T	IL121-M10BS-T	1000	M10x1.50	1/2	1	1/2	1	3/8
IL121-M12B-T	IL121-M12BS-T	2000	M12x1.75	5/8	1	1/2	1	3/8
IL121-M16B-T	IL121-M16BS-T	2500	M16x2.0	3/4	1	5/8	1-1/8	1/2
IL121-M20B-T	IL121-M20BS-T	3000	M20x2.5	1	1	3/4	1-1/4	5/8
IL122-M6B-T	IL122-M6BS-T	100	M6x1.0	1/2	1-1/4	1/4	3/4	1/4
IL122-M8B-T	IL122-M8BS-T	500	M8x1.25	1/2	1-1/4	3/8	7/8	1/4
IL122-M10B-T	IL122-M10BS-T	1000	M10x1.50	1/2	1-1/4	1/2	1	3/8
IL122-M12B-T	IL122-M12BS-T	2000	M12x1.75	5/8	1-1/4	1/2	1	3/8
IL122-M16B-T	IL122-M16BS-T	2500	M16x2.0	3/4	1-1/4	5/8	1-1/8	1/2
IL122-M20B-T	IL122-M20BS-T	3000	M20x2.5	1	1-1/4	3/4	1-1/4	5/8
IL123-M6B-T	IL123-M6BS-T	100	M6x1.0	1/2	1-1/2	1/4	3/4	1/4
IL123-M8B-T	IL123-M8BS-T	500	M8x1.25	1/2	1-1/2	3/8	7/8	1/4
IL123-M10B-T	IL123-M10BS-T	1000	M10x1.50	1/2	1-1/2	1/2	1	3/8
IL123-M12B-T	IL123-M12BS-T	2000	M12x1.75	5/8	1-1/2	1/2	1	3/8
IL123-M16B-T	IL123-M16BS-T	2500	M16x2.0	3/4	1-1/2	5/8	1-1/8	1/2
IL123-M20B-T	IL123-M20BS-T	3000	M20x2.5	1	1-1/2	3/4	1-1/4	5/8
IL124-M6B-T	IL124-M6BS-T	100	M6x1.0	1/2	1-3/4	1/4	3/4	1/4
IL124-M8B-T	IL124-M8BS-T	500	M8x1.25	1/2	1-3/4	3/8	7/8	1/4
IL124-M10B-T	IL124-M10BS-T	1000	M10x1.50	1/2	1-3/4	1/2	1	3/8
IL124-M12B-T	IL124-M12BS-T	2000	M12x1.75	5/8	1-3/4	1/2	1	3/8
IL124-M16B-T	IL124-M16BS-T	2500	M16x2.0	3/4	1-3/4	5/8	1-1/8	1/2
IL124-M20B-T	IL124-M20BS-T	3000	M20x2.5	1	1-3/4	3/4	1-1/4	5/8
IL125-M6B-T	IL125-M6BS-T	100	M6x1.0	1/2	2	1/4	3/4	1/4
IL125-M8B-T	IL125-M8BS-T	500	M8x1.25	1/2	2	3/8	7/8	1/4
IL125-M10B-T	IL125-M10BS-T	1000	M10x1.50	1/2	2	1/2	1	3/8
IL125-M12B-T	IL125-M12BS-T	2000	M12x1.75	5/8	2	1/2	1	3/8
IL125-M16B-T	IL125-M16BS-T	2500	M16x2.0	3/4	2	5/8	1-1/8	1/2
IL125-M20B-T	IL125-M20BS-T	3000	M20x2.5	1	2	3/4	1-1/4	5/8
IL126-M6B-T	IL126-M6BS-T	100	M6x1.0	1/2	3	1/4	3/4	1/4
IL126-M8B-T	IL126-M8BS-T	500	M8x1.25	1/2	3	3/8	7/8	1/4
IL126-M10B-T	IL126-M10BS-T	1000	M10x1.50	1/2	3	1/2	1	3/8
IL126-M12B-T	IL126-M12BS-T	2000	M12x1.75	5/8	3	1/2	1	3/8
IL126-M16B-T	IL126-M16BS-T	2500	M16x2.0	3/4	3	5/8	1-1/8	1/2
IL126-M20B-T	IL126-M20BS-T	3000	M20x2.5	1	3	3/4	1-1/4	5/8
IL127-M6B-T	IL127-M6BS-T	100	M6x1.0	1/2	4	1/4	3/4	1/4
IL127-M8B-T	IL127-M8BS-T	500	M8x1.25	1/2	4	3/8	7/8	1/4
IL127-M10B-T	IL127-M10BS-T	1000	M10x1.50	1/2	4	1/2	1	3/8
IL127-M12B-T	IL127-M12BS-T	2000	M12x1.75	5/8	4	1/2	1	3/8
IL127-M16B-T	IL127-M16BS-T	2500	M16x2.0	3/4	4	5/8	1-1/8	1/2
IL127-M20B-T	IL127-M20BS-T	3000	M20x2.5	1	4	3/4	1-1/4	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**SAUCER BASE® SWIVEL SOCKET****Medium Duty Low-Profile, SAUCER BASE® Swivel Socket Levelers**


The IEC *Saucer Base® Swivel Socket Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. **Steel socket has gold zinc plating.**

Features

- Loads to 3000 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

**OPTIONAL BASE COLORS****LOW PROFILE SWIVEL — SOCKET LEVELERS**

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL130-4B-T	IL130-4BS-T	100	1/4-20	1/2	3/4	1/4	3/4	1/4
IL130-5B-T	IL130-5BS-T	500	5/16-18	1/2	3/4	3/8	7/8	1/4
IL130-6B-T	IL130-6BS-T	1000	3/8-16	1/2	3/4	1/2	1	3/8
IL130-7B-T	IL130-7BS-T	2000	1/2-13	5/8	3/4	1/2	1	3/8
IL130-8B-T	IL130-8BS-T	3000	5/8-11	3/4	3/4	5/8	1-1/8	1/2
IL130-9B-T	IL130-9BS-T	3000	3/4-10	1	3/4	3/4	1-1/4	5/8
IL131-4B-T	IL131-4BS-T	100	1/4-20	1/2	1	1/4	3/4	1/4
IL131-5B-T	IL131-5BS-T	500	5/16-18	1/2	1	3/8	7/8	1/4
IL131-6B-T	IL131-6BS-T	1000	3/8-16	1/2	1	1/2	1	3/8
IL131-7B-T	IL131-7BS-T	2000	1/2-13	5/8	1	1/2	1	3/8
IL131-8B-T	IL131-8BS-T	3000	5/8-11	3/4	1	5/8	1-1/8	1/2
IL131-9B-T	IL131-9BS-T	3000	3/4-10	1	1	3/4	1-1/4	5/8
IL132-4B-T	IL132-4BS-T	100	1/4-20	1/2	1-1/4	1/4	3/4	1/4
IL132-5B-T	IL132-5BS-T	500	5/16-18	1/2	1-1/4	3/8	7/8	1/4
IL132-6B-T	IL132-6BS-T	1000	3/8-16	1/2	1-1/4	1/2	1	3/8
IL132-7B-T	IL132-7BS-T	2000	1/2-13	5/8	1-1/4	1/2	1	3/8
IL132-8B-T	IL132-8BS-T	3000	5/8-11	3/4	1-1/4	5/8	1-1/8	1/2
IL132-9B-T	IL132-9BS-T	3000	3/4-10	1	1-1/4	3/4	1-1/4	5/8
IL133-4B-T	IL133-4BS-T	100	1/4-20	1/2	1-1/2	1/4	3/4	1/4
IL133-5B-T	IL133-5BS-T	500	5/16-18	1/2	1-1/2	3/8	7/8	1/4
IL133-6B-T	IL133-6BS-T	1000	3/8-16	1/2	1-1/2	1/2	1	3/8
IL133-7B-T	IL133-7BS-T	2000	1/2-13	5/8	1-1/2	1/2	1	3/8
IL133-8B-T	IL133-8BS-T	3000	5/8-11	3/4	1-1/2	5/8	1-1/8	1/2
IL133-9B-T	IL133-9BS-T	3000	3/4-10	1	1-1/2	3/4	1-1/4	5/8
IL134-4B-T	IL134-4BS-T	100	1/4-20	1/2	1-3/4	1/4	3/4	1/4
IL134-5B-T	IL134-5BS-T	500	5/16-18	1/2	1-3/4	3/8	7/8	1/4
IL134-6B-T	IL134-6BS-T	1000	3/8-16	1/2	1-3/4	1/2	1	3/8
IL134-7B-T	IL134-7BS-T	2000	1/2-13	5/8	1-3/4	1/2	1	3/8
IL134-8B-T	IL134-8BS-T	3000	5/8-11	3/4	1-3/4	5/8	1-1/8	1/2
IL134-9B-T	IL134-9BS-T	3000	3/4-10	1	1-3/4	3/4	1-1/4	5/8
IL135-4B-T	IL135-4BS-T	100	1/4-20	1/2	2	1/4	3/4	1/4
IL135-5B-T	IL135-5BS-T	500	5/16-18	1/2	2	3/8	7/8	1/4
IL135-6B-T	IL135-6BS-T	1000	3/8-16	1/2	2	1/2	1	3/8
IL135-7B-T	IL135-7BS-T	2000	1/2-13	5/8	2	1/2	1	3/8
IL135-8B-T	IL135-8BS-T	3000	5/8-11	3/4	2	5/8	1-1/8	1/2
IL135-9B-T	IL135-9BS-T	3000	3/4-10	1	2	3/4	1-1/4	5/8
IL136-4B-T	IL136-4BS-T	100	1/4-20	1/2	3	1/4	3/4	1/4
IL136-5B-T	IL136-5BS-T	500	5/16-18	1/2	3	3/8	7/8	1/4
IL136-6B-T	IL136-6BS-T	1000	3/8-16	1/2	3	1/2	1	3/8
IL136-7B-T	IL136-7BS-T	2000	1/2-13	5/8	3	1/2	1	3/8
IL136-8B-T	IL136-8BS-T	3000	5/8-11	3/4	3	5/8	1-1/8	1/2
IL136-9B-T	IL136-9BS-T	3000	3/4-10	1	3	3/4	1-1/4	5/8
IL137-4B-T	IL137-4BS-T	100	1/4-20	1/2	4	1/4	3/4	1/4
IL137-5B-T	IL137-5BS-T	500	5/16-18	1/2	4	3/8	7/8	1/4
IL137-6B-T	IL137-6BS-T	1000	3/8-16	1/2	4	1/2	1	3/8
IL137-7B-T	IL137-7BS-T	2000	1/2-13	5/8	4	1/2	1	3/8
IL137-8B-T	IL137-8BS-T	3000	5/8-11	3/4	4	5/8	1-1/8	1/2
IL137-9B-T	IL137-9BS-T	3000	3/4-10	1	4	3/4	1-1/4	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Medium Duty Low-Profile, SAUCER BASE® Swivel Socket Metric Levelers

The IEC Saucer Base® Swivel Metric Socket Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick.

Steel socket has gold zinc plating.


Features

- Loads to 3000 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables


**MEDIUM-DUTY LEVELERS****SAUCER BASE® SWIVEL SOCKET—METRIC****OPTIONAL BASE COLORS****METRIC LOW PROFILE SWIVEL — SOCKET LEVELERS**

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL130-M6-T	IL130-M6S-T	100	M6x1	1/2	3/4	1/4	3/4	1/4
IL130-M8-T	IL130-M8S-T	500	M8x1.25	1/2	3/4	3/8	7/8	1/4
IL130-M10-T	IL130-M10S-T	1000	M10x1.50	1/2	3/4	1/2	1	3/8
IL130-M12-T	IL130-M12S-T	2000	M12x1.75	5/8	3/4	1/2	1	3/8
IL130-M16-T	IL130-M16S-T	3000	M16x2.00	3/4	3/4	5/8	1-1/8	1/2
IL130-M20-T	IL130-M20S-T	3000	M20x2.50	1	3/4	3/4	1-1/4	5/8
IL131-M6-T	IL131-M6S-T	100	M6x1	1/2	1	1/4	3/4	1/4
IL131-M8-T	IL131-M8S-T	500	M8x1.25	1/2	1	3/8	7/8	1/4
IL131-M10-T	IL131-M10S-T	1000	M10x1.50	1/2	1	1/2	1	3/8
IL131-M12-T	IL131-M12S-T	2000	M12x1.75	5/8	1	1/2	1	3/8
IL131-M16-T	IL131-M16S-T	3000	M16x2.00	3/4	1	5/8	1-1/8	1/2
IL131-M20-T	IL131-M20S-T	3000	M20x2.50	1	1	3/4	1-1/4	5/8
IL132-M6-T	IL132-M6S-T	100	M6x1	1/2	1-1/4	1/4	3/4	1/4
IL132-M8-T	IL132-M8S-T	500	M8x1.25	1/2	1-1/4	3/8	7/8	1/4
IL132-M10-T	IL132-M10S-T	1000	M10x1.50	1/2	1-1/4	1/2	1	3/8
IL132-M12-T	IL132-M12S-T	2000	M12x1.75	5/8	1-1/4	1/2	1	3/8
IL132-M16-T	IL132-M16S-T	3000	M16x2.00	3/4	1-1/4	5/8	1-1/8	1/2
IL132-M20-T	IL132-M20S-T	3000	M20x2.50	1	1-1/4	3/4	1-1/4	5/8
IL133-M6-T	IL133-M6S-T	100	M6x1	1/2	1-1/2	1/4	3/4	1/4
IL133-M8-T	IL133-M8S-T	500	M8x1.25	1/2	1-1/2	3/8	7/8	1/4
IL133-M10-T	IL133-M10S-T	1000	M10x1.50	1/2	1-1/2	1/2	1	3/8
IL133-M12-T	IL133-M12S-T	2000	M12x1.75	5/8	1-1/2	1/2	1	3/8
IL133-M16-T	IL133-M16S-T	3000	M16x2.00	3/4	1-1/2	5/8	1-1/8	1/2
IL133-M20-T	IL133-M20S-T	3000	M20x2.50	1	1-1/2	3/4	1-1/4	5/8
IL134-M6-T	IL134-M6S-T	100	M6x1	1/2	1-3/4	1/4	3/4	1/4
IL134-M8-T	IL134-M8S-T	500	M8x1.25	1/2	1-3/4	3/8	7/8	1/4
IL134-M10-T	IL134-M10S-T	1000	M10x1.50	1/2	1-3/4	1/2	1	3/8
IL134-M12-T	IL134-M12S-T	2000	M12x1.75	5/8	1-3/4	1/2	1	3/8
IL134-M16-T	IL134-M16S-T	3000	M16x2.00	3/4	1-3/4	5/8	1-1/8	1/2
IL134-M20-T	IL134-M20S-T	3000	M20x2.50	1	1-3/4	3/4	1-1/4	5/8
IL135-M6-T	IL135-M6S-T	100	M6x1	1/2	2	1/4	3/4	1/4
IL135-M8-T	IL135-M8S-T	500	M8x1.25	1/2	2	3/8	7/8	1/4
IL135-M10-T	IL135-M10S-T	1000	M10x1.50	1/2	2	1/2	1	3/8
IL135-M12-T	IL135-M12S-T	2000	M12x1.75	5/8	2	1/2	1	3/8
IL135-M16-T	IL135-M16S-T	3000	M16x2.00	3/4	2	5/8	1-1/8	1/2
IL135-M20-T	IL135-M20S-T	3000	M20x2.50	1	2	3/4	1-1/4	5/8
IL136-M6-T	IL136-M6S-T	100	M6x1	1/2	3	1/4	3/4	1/4
IL136-M8-T	IL136-M8S-T	500	M8x1.25	1/2	3	3/8	7/8	1/4
IL136-M10-T	IL136-M10S-T	1000	M10x1.50	1/2	3	1/2	1	3/8
IL136-M12-T	IL136-M12S-T	2000	M12x1.75	5/8	3	1/2	1	3/8
IL136-M16-T	IL136-M16S-T	3000	M16x2.00	3/4	3	5/8	1-1/8	1/2
IL136-M20-T	IL136-M20S-T	3000	M20x2.50	1	3	3/4	1-1/4	5/8
IL137-M6-T	IL137-M6S-T	100	M6x1	1/2	4	1/4	3/4	1/4
IL137-M8-T	IL137-M8S-T	500	M8x1.25	1/2	4	3/8	7/8	1/4
IL137-M10-T	IL137-M10S-T	1000	M10x1.50	1/2	4	1/2	1	3/8
IL137-M12-T	IL137-M12S-T	2000	M12x1.75	5/8	4	1/2	1	3/8
IL137-M16-T	IL137-M16S-T	3000	M16x2.00	3/4	4	5/8	1-1/8	1/2
IL137-M20-T	IL137-M20S-T	3000	M20x2.50	1	4	3/4	1-1/4	5/8



THREADED TUBE ENDS


These round, square and rectangular threaded tube ends are made of fiberglass reinforced black nylon material with a brass threaded insert. Many more threaded tube ends, weld nuts, t-nuts for wood applications, corner and side brackets can be found in our *Light Duty Levelers* catalog.

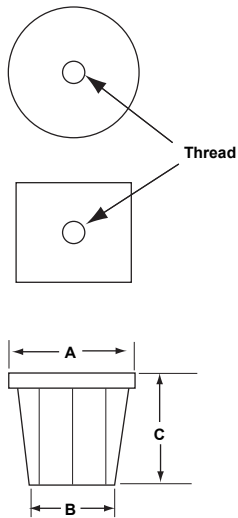

P/N (round)	Thread	Load	A	B	C	Tubing Gauge	Wall Thickness
IL27-R7N	1/2-13	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-R8N	5/8-11	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-R9N	3/4-10	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-RM16N	M16	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-R7N5	1/2-13	1000	2	1.78	2	SCH.5	.065
IL27-R8N5	5/8-11	1000	2	1.78	2	SCH.5	.065
IL27-R9N5	3/4-10	1000	2	1.78	2	SCH.5	.065
IL27-RM16N5	M16	1000	2	1.78	2	SCH.5	.065
IL27-R7N10	1/2-13	1000	2	1.69	2	SCH.10	.109
IL27-R8N10	5/8-11	1000	2	1.69	2	SCH.10	.109
IL27-R9N10	3/4-10	1760	2	1.69	2	SCH.10	.109
IL27-RM16N10	M16	1760	2	1.69	2	SCH.10	.109
IL27A-R7N	1/2-13	1000	2	1.91	2	16GA	.065-.075
IL27A-R8N	5/8-11	1000	2	1.91	2	16GA	.065-.075
IL27A-R9N	3/4-10	1760	2	1.91	2	16GA	.065-.075
IL27A-RM16N	M16	1760	2	1.91	2	16GA	.065-.075

P/N (square)	Thread	Load	A	B	C	Tubing Gauge	Wall Thickness
IL27-7N	1/2-13	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-8N	5/8-11	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-9N	3/4-10	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-M16N	M16	1000	1-1/2	1.37	1-3/4	16GA	.065-.075
IL27-7N2	1/2-13	1000	1-1/2	1.26	1-3/4	11GA	.109
IL27-8N2	5/8-11	1000	1-1/2	1.26	1-3/4	11GA	.109
IL27-9N2	3/4-10	1000	1-1/2	1.26	1-3/4	11GA	.109
IL27-M16N2	M16	1000	1-1/2	1.26	1-3/4	11GA	.109
IL27A-7N	1/2-13	1000	2	1.87	2	16GA	.065-.075
IL27A-8N	5/8-11	1000	2	1.87	2	16GA	.065-.075
IL27A-9N	3/4-10	1760	2	1.87	2	16GA	.065-.075
IL27A-M16N	M16	1760	2	1.87	2	16GA	.065-.075
IL27A-7N2	1/2-13	1000	2	1.78	2	11GA	.109-.120
IL27A-8N2	5/8-11	1000	2	1.78	2	11GA	.109-.120
IL27A-9N2	3/4-10	1760	2	1.78	2	11GA	.109-.120
IL27A-M16N2	M16	1760	2	1.78	2	11GA	.109-.120

P/N (rect.)	Thread	Load	A	B	C	Tubing Gauge	Wall Thickness
IL27A-RE-7N2	1/2-13	1760	2X3	1.78	1-1/2	11GA	.125
IL27A-RE-8N2	5/8-11	1760	2X3	1.78	1-1/2	11GA	.125
IL27A-RE-9N2	3/4-10	1760	2X3	1.78	1-1/2	11GA	.125
IL27A-RE-M16N2	M16x2.0	1760	2X3	1.78	1-1/2	11GA	.125



NOTES

69



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com


MEDIUM-DUTY LEVELERS

POLY SWIVEL

LOW PROFILE SOCKET

LOW PROFILE POLY SWIVEL SOCKET LEVELERS

The IEC Poly Base Steel and Stainless Steel Swivel Socket Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4" with 15 degree swivel from centerline. Steel Socket has trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



Nut Height: "G" = 1/2", 5/8", 11/16", 3/4"
for Threads: 1/2-13, 5/8-11, 3/4-10, 1-8

Nut Height: "G" = 3/16"
for Threads: 1/4-20, 5/16-18, 3/8-16

LOW PROFILE POLY SWIVEL — SOCKET LEVELERS

Steel	Stainless	Load	A	B	C	D	F	G
IL51-4G	IL51-4S	100	1/4-20	1/2	5/8	1	3/8	3/16
IL51-5G	IL51-5S	500	5/16-18	1/2	5/8	1	3/8	3/16
IL51-6G	IL51-6S	1000	3/8-16	1/2	5/8	1	3/8	3/16
IL51-7G	IL51-7S	2000	1/2-13	5/8	15/16	1	3/8	1/2
IL51-8G	IL51-8S	3000	5/8-11	3/4	1-1/8	1	1/2	5/8
IL51-9G	IL51-9S	3000	3/4-10	1	1-3/16	1	9/16	11/16
IL51-10G	IL51-10S	3000	1-8	1-1/4	1-1/4	1	5/8	3/4
IL53-4G	IL53-4S	100	1/4-20	1/2	5/8	1 1/2	3/8	3/16
IL53-5G	IL53-5S	500	5/16-18	1/2	5/8	1 1/2	3/8	3/16
IL53-6G	IL53-6S	1000	3/8-16	1/2	5/8	1 1/2	3/8	3/16
IL53-7G	IL53-7S	2000	1/2-13	5/8	15/16	1 1/2	3/8	1/2
IL53-8G	IL53-8S	3000	5/8-11	3/4	1-1/8	1 1/2	1/2	5/8
IL53-9G	IL53-9S	3000	3/4-10	1	1-3/16	1 1/2	9/16	11/16
IL53-10G	IL53-10S	3000	1-8	1-1/4	1-1/4	1 1/2	5/8	3/4
IL55-4G	IL55-4S	100	1/4-20	1/2	5/8	2	3/8	3/16
IL55-5G	IL55-5S	500	5/16-18	1/2	5/8	2	3/8	3/16
IL55-6G	IL55-6S	1000	3/8-16	1/2	5/8	2	3/8	3/16
IL55-7G	IL55-7S	2000	1/2-13	5/8	15/16	2	3/8	1/2
IL55-8G	IL55-8S	3000	5/8-11	3/4	1-1/8	2	1/2	5/8
IL55-9G	IL55-9S	3000	3/4-10	1	1-3/16	2	9/16	11/16
IL55-10G	IL55-10S	3000	1-8	1-1/4	1-1/4	2	5/8	3/4
IL57-4G	IL57-4S	100	1/4-20	1/2	5/8	3	3/8	3/16
IL57-5G	IL57-5S	500	5/16-18	1/2	5/8	3	3/8	3/16
IL57-6G	IL57-6S	1000	3/8-16	1/2	5/8	3	3/8	3/16
IL57-7G	IL57-7S	2000	1/2-13	5/8	15/16	3	3/8	1/2
IL57-8G	IL57-8S	3000	5/8-11	3/4	1-1/8	3	1/2	5/8
IL57-9G	IL57-9S	3000	3/4-10	1	1-3/16	3	9/16	11/16
IL57-10G	IL57-10S	3000	1-8	1-1/4	1-1/4	3	5/8	3/4
IL59-4G	IL59-4S	100	1/4-20	1/2	5/8	4	3/8	3/16
IL59-5G	IL59-5S	500	5/16-18	1/2	5/8	4	3/8	3/16
IL59-6G	IL59-6S	1000	3/8-16	1/2	5/8	4	3/8	3/16
IL59-7G	IL59-7S	2000	1/2-13	5/8	15/16	4	3/8	1/2
IL59-8G	IL59-8S	3000	5/8-11	3/4	1-1/8	4	1/2	5/8
IL59-9G	IL59-9S	3000	3/4-10	1	1-3/16	4	9/16	11/16
IL59-10G	IL59-10S	3000	1-8	1-1/4	1-1/4	4	5/8	3/4



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com


MEDIUM-DUTY LEVELERS

POLY SWIVEL

LP METRIC SOCKET

LOW PROFILE METRIC POLY SWIVEL SOCKET LEVELERS

The IEC Poly Base Steel and Stainless Steel Swivel Socket Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4" with 15 degree swivel from centerline. Steel Socket has trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



Nut Height: "G" = 1/2", 5/8", 11/16", 3/4"
for Threads: M12, M16, M20, M24

Nut Height: "G" = 3/16"
for Threads: M6, M8, M10

LOW PROFILE METRIC POLY SWIVEL — SOCKET LEVELERS

Steel	Stainless	Load	A	B	C	D	F	G
IL51-M6G	IL51-M6S	100	M6X1	1/2	5/8	1	3/8	3/16
IL51-M8G	IL51-M8S	500	M8X1.25	1/2	5/8	1	3/8	3/16
IL51-M10G	IL51-M10S	1000	M10X1.50	1/2	5/8	1	3/8	3/16
IL51-M12G	IL51-M12S	2000	M12X1.75	5/8	15/16	1	3/8	1/2
IL51-M16G	IL51-M16S	3000	M16X2.00	3/4	1-1/8	1	1/2	5/8
IL51-M20G	IL51-M20S	3000	M20X2.50	1	1-3/16	1	9/16	11/16
IL51-M24G	IL51-M24S	3000	M24X3.00	1-1/4	1-1/4	1	5/8	3/4
IL53-M6G	IL53-M6S	100	M6X1	1/2	5/8	1 1/2	3/8	3/16
IL53-M8G	IL53-M8S	500	M8X1.25	1/2	5/8	1 1/2	3/8	3/16
IL53-M10G	IL53-M10S	1000	M10X1.50	1/2	5/8	1 1/2	3/8	3/16
IL53-M12G	IL53-M12S	2000	M12X1.75	5/8	15/16	1 1/2	3/8	1/2
IL53-M16G	IL53-M16S	3000	M16X2.00	3/4	1-1/8	1 1/2	1/2	5/8
IL53-M20G	IL53-M20S	3000	M20X2.50	1	1-3/16	1 1/2	9/16	11/16
IL53-M24G	IL53-M24S	3000	M24X3.00	1-1/4	1-1/4	1 1/2	5/8	3/4
IL55-M6G	IL55-M6S	100	M6X1	1/2	5/8	2	3/8	3/16
IL55-M8G	IL55-M8S	500	M8X1.25	1/2	5/8	2	3/8	3/16
IL55-M10G	IL55-M10S	1000	M10X1.50	1/2	5/8	2	3/8	3/16
IL55-M12G	IL55-M12S	2000	M12X1.75	5/8	15/16	2	3/8	1/2
IL55-M16G	IL55-M16S	3000	M16X2.00	3/4	1-1/8	2	1/2	5/8
IL55-M20G	IL55-M20S	3000	M20X2.50	1	1-3/16	2	9/16	11/16
IL55-M24G	IL55-M24S	3000	M24X3.00	1-1/4	1-1/4	2	5/8	3/4
IL57-M6G	IL57-M6S	100	M6X1	1/2	5/8	3	3/8	3/16
IL57-M8G	IL57-M8S	500	M8X1.25	1/2	5/8	3	3/8	3/16
IL57-M10G	IL57-M10S	1000	M10X1.50	1/2	5/8	3	3/8	3/16
IL57-M12G	IL57-M12S	2000	M12X1.75	5/8	15/16	3	3/8	1/2
IL57-M16G	IL57-M16S	3000	M16X2.00	3/4	1-1/8	3	1/2	5/8
IL57-M20G	IL57-M20S	3000	M20X2.50	1	1-3/16	3	9/16	11/16
IL57-M24G	IL57-M24S	3000	M24X3.00	1-1/4	1-1/4	3	5/8	3/4
IL59-M6G	IL59-M6S	100	M6X1	1/2	5/8	4	3/8	3/16
IL59-M8G	IL59-M8S	500	M8X1.25	1/2	5/8	4	3/8	3/16
IL59-M10G	IL59-M10S	1000	M10X1.50	1/2	5/8	4	3/8	3/16
IL59-M12G	IL59-M12S	2000	M12X1.75	5/8	15/16	4	3/8	1/2
IL59-M16G	IL59-M16S	3000	M16X2.00	3/4	1-1/8	4	1/2	5/8
IL59-M20G	IL59-M20S	3000	M20X2.50	1	1-3/16	4	9/16	11/16
IL59-M24G	IL59-M24S	3000	M24X3.00	1-1/4	1-1/4	4	5/8	3/4



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

1, 1-1/2, 2 INCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE POLY SWIVEL — 1"to 2" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-4Gx1	IL50-4Sx1	100	1/4-20	1/2	3/4	1	1-3/4	1	3/16
IL50-4Gx15	IL50-4Sx15	100	1/4-20	1/2	3/4	1	2-1/4	1-1/2	3/16
IL50-4G	IL50-4S	100	1/4-20	1/2	3/4	1	2-3/4	2	3/16
IL50-5Gx1	IL50-5Sx1	500	5/16-18	1/2	3/4	1	1-3/4	1	3/16
IL50-5G	IL50-5S	500	5/16-18	1/2	3/4	1	2-3/4	2	3/16
IL50-6G	IL50-6S	1000	3/8-16	1/2	3/4	1	2-3/4	2	3/16
IL50-7G	IL50-7S	2000	1/2-13	1/2	3/4	1	2-3/4	2	3/16
IL50-8G	IL50-8S	3000	5/8-11	5/8	3/4	1	2-3/4	2	3/16
IL50-9G	IL50-9S	3000	3/4-10	3/4	3/4	1	2-3/4	2	3/16
IL50-10G	IL50-10S	3000	1-8	1	1	1	3	2	1/2
IL50-12G	IL50-12S	3000	1 1/4-7	1 1/4	1	1	3	2	1/2
IL52-4Gx1	IL52-4Sx1	100	1/4-20	1/2	3/4	1 1/2	1-3/4	1	3/16
IL52-4Gx15	IL52-4Sx15	100	1/4-20	1/2	3/4	1 1/2	2-1/4	1-1/2	3/16
IL52-4G	IL52-4S	100	1/4-20	1/2	3/4	1 1/2	2-3/4	2	3/16
IL52-5Gx1	IL52-5Sx1	500	5/16-18	1/2	3/4	1 1/2	1-3/4	1	3/16
IL52-5G	IL52-5S	500	5/16-18	1/2	3/4	1 1/2	2-3/4	2	3/16
IL52-6G	IL52-6S	1000	3/8-16	1/2	3/4	1 1/2	2-3/4	2	3/16
IL52-7G	IL52-7S	2000	1/2-13	1/2	3/4	1 1/2	2-3/4	2	3/16
IL52-8G	IL52-8S	3000	5/8-11	5/8	3/4	1 1/2	2-3/4	2	3/16
IL52-9G	IL52-9S	3000	3/4-10	3/4	3/4	1 1/2	2-3/4	2	3/16
IL52-10G	IL52-10S	3000	1-8	1	1	1 1/2	3	2	1/2
IL52-12G	IL52-12S	3000	1 1/4-7	1 1/4	1	1 1/2	3	2	1/2
IL54-4Gx1	IL54-4Sx1	100	1/4-20	1/2	3/4	2	1-3/4	1	3/16
IL54-4Gx15	IL54-4Sx15	100	1/4-20	1/2	3/4	2	2-1/4	1-1/2	3/16
IL54-4G	IL54-4S	100	1/4-20	1/2	3/4	2	2-3/4	2	3/16
IL54-5Gx1	IL54-5Sx1	500	5/16-18	1/2	3/4	2	1-3/4	1	3/16
IL54-5G	IL54-5S	500	5/16-18	1/2	3/4	2	2-3/4	2	3/16
IL54-6G	IL54-6S	1000	3/8-16	1/2	3/4	2	2-3/4	2	3/16
IL54-7G	IL54-7S	2000	1/2-13	1/2	3/4	2	2-3/4	2	3/16
IL54-8G	IL54-8S	3000	5/8-11	5/8	3/4	2	2-3/4	2	3/16
IL54-9G	IL54-9S	3000	3/4-10	3/4	3/4	2	2-3/4	2	3/16
IL54-10G	IL54-10S	3000	1-8	1	1	2	3	2	1/2
IL54-12G	IL54-12S	3000	1 1/4-7	1 1/4	1	2	3	2	1/2
IL56-4Gx1	IL56-4Sx1	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL56-4Gx15	IL56-4Sx15	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL56-4G	IL56-4S	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL56-5Gx1	IL56-5Sx1	500	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL56-5G	IL56-5S	500	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL56-6G	IL56-6S	1000	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL56-7G	IL56-7S	2000	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL56-8G	IL56-8S	3000	5/8-11	5/8	3/4	3	2-3/4	2	3/16
IL56-9G	IL56-9S	3000	3/4-10	3/4	3/4	3	2-3/4	2	3/16
IL56-10G	IL56-10S	3000	1-8	1	1	3	3	2	1/2
IL56-12G	IL56-12S	3000	1 1/4-7	1 1/4	1	3	3	2	1/2
IL58-4Gx1	IL58-4Sx1	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL58-4Gx15	IL58-4Sx15	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL58-4G	IL58-4S	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL58-5Gx1	IL58-5Sx1	500	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL58-5G	IL58-5S	500	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL58-6G	IL58-6S	1000	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL58-7G	IL58-7S	2000	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL58-8G	IL58-8S	3000	5/8-11	5/8	3/4	4	2-3/4	2	3/16
IL58-9G	IL58-9S	3000	3/4-10	3/4	3/4	4	2-3/4	2	3/16
IL58-10G	IL58-10S	3000	1-8	1	1	4	3	2	1/2
IL58-12G	IL58-12S	3000	1 1/4-7	1 1/4	1	4	3	2	1/2

To order optional top broached hex, "allen drive," add "-BR".

NOTE: See next page for Top Hex (Allen-drive) Thread & Hex Size table at bottom of page.

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

3 INCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS



The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

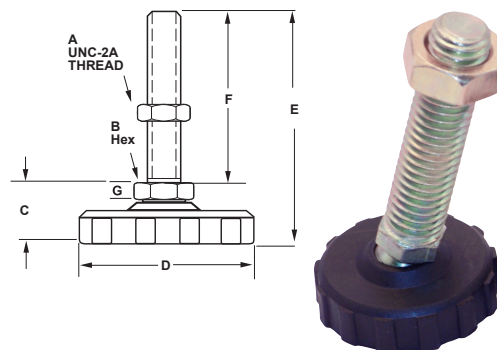**LOW PROFILE POLY SWIVEL — 3" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-4Gx3	IL50-4Sx3	100	1/4-20	1/2	3/4	1	3-3/4	3	3/16
IL50-5Gx3	IL50-5Sx3	500	5/16-18	1/2	3/4	1	3-3/4	3	3/16
IL50-6Gx3	IL50-6Sx3	1000	3/8-16	1/2	3/4	1	3-3/4	3	3/16
IL50-7Gx3	IL50-7Sx3	2000	1/2-13	1/2	3/4	1	3-3/4	3	3/16
IL50-8Gx3	IL50-8Sx3	3000	5/8-11	5/8	3/4	1	3-3/4	3	3/16
IL50-9Gx3	IL50-9Sx3	3000	3/4-10	3/4	3/4	1	3-3/4	3	3/16
IL50-10Gx3	IL50-10Sx3	3000	1-8	1	1	1	4	3	1/2
IL50-12Gx3	IL50-12Sx3	3000	1 1/4-7	1 1/4	1	1	4	3	1/2
IL52-4Gx3	IL52-4Sx3	100	1/4-20	1/2	3/4	1 1/2	3-3/4	3	3/16
IL52-5Gx3	IL52-5Sx3	500	5/16-18	1/2	3/4	1 1/2	3-3/4	3	3/16
IL52-6Gx3	IL52-6Sx3	1000	3/8-16	1/2	3/4	1 1/2	3-3/4	3	3/16
IL52-7Gx3	IL52-7Sx3	2000	1/2-13	1/2	3/4	1 1/2	3-3/4	3	3/16
IL52-8Gx3	IL52-8Sx3	3000	5/8-11	5/8	3/4	1 1/2	3-3/4	3	3/16
IL52-9Gx3	IL52-9Sx3	3000	3/4-10	3/4	3/4	1 1/2	3-3/4	3	3/16
IL52-10Gx3	IL52-10Sx3	3000	1-8	1	1	1 1/2	4	3	1/2
IL52-12Gx3	IL52-12Sx3	3000	1 1/4-7	1 1/4	1	1 1/2	4	3	1/2
IL54-4Gx3	IL54-4Sx3	100	1/4-20	1/2	3/4	2	3-3/4	3	3/16
IL54-5Gx3	IL54-5Sx3	500	5/16-18	1/2	3/4	2	3-3/4	3	3/16
IL54-6Gx3	IL54-6Sx3	1000	3/8-16	1/2	3/4	2	3-3/4	3	3/16
IL54-7Gx3	IL54-7Sx3	2000	1/2-13	1/2	3/4	2	3-3/4	3	3/16
IL54-8Gx3	IL54-8Sx3	3000	5/8-11	5/8	3/4	2	3-3/4	3	3/16
IL54-9Gx3	IL54-9Sx3	3000	3/4-10	3/4	3/4	2	3-3/4	3	3/16
IL54-10Gx3	IL54-10Sx3	3000	1-8	1	1	2	4	3	1/2
IL54-12Gx3	IL54-12Sx3	3000	1 1/4-7	1 1/4	1	2	4	3	1/2
IL56-4Gx3	IL56-4Sx3	100	1/4-20	1/2	3/4	3	3-3/4	3	3/16
IL56-5Gx3	IL56-5Sx3	500	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL56-6Gx3	IL56-6Sx3	1000	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL56-7Gx3	IL56-7Sx3	2000	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL56-8Gx3	IL56-8Sx3	3000	5/8-11	5/8	3/4	3	3-3/4	3	3/16
IL56-9Gx3	IL56-9Sx3	3000	3/4-10	3/4	3/4	3	3-3/4	3	3/16
IL56-10Gx3	IL56-10Sx3	3000	1-8	1	1	3	4	3	1/2
IL56-12Gx3	IL56-12Sx3	3000	1 1/4-7	1 1/4	1	3	4	3	1/2
IL58-4Gx3	IL58-4Sx3	100	1/4-20	1/2	3/4	4	3-3/4	3	3/16
IL58-5Gx3	IL58-5Sx3	500	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL58-6Gx3	IL58-6Sx3	1000	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL58-7Gx3	IL58-7Sx3	2000	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL58-8Gx3	IL58-8Sx3	3000	5/8-11	5/8	3/4	4	3-3/4	3	3/16
IL58-9Gx3	IL58-9Sx3	3000	3/4-10	3/4	3/4	4	3-3/4	3	3/16
IL58-10Gx3	IL58-10Sx3	3000	1-8	1	1	4	4	3	1/2
IL58-12Gx3	IL58-12Sx3	3000	1 1/4-7	1 1/4	1	4	4	3	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

4 NCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE POLY SWIVEL — 4" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-5Gx4	IL50-5Sx4	500	5/16-18	1/2	3/4	1	4-3/4	4	3/16
IL50-6Gx4	IL50-6Sx4	1000	3/8-16	1/2	3/4	1	4-3/4	4	3/16
IL50-7Gx4	IL50-7Sx4	2000	1/2-13	1/2	3/4	1	4-3/4	4	3/16
IL50-8Gx4	IL50-8Sx4	3000	5/8-11	5/8	3/4	1	4-3/4	4	3/16
IL50-9Gx4	IL50-9Sx4	3000	3/4-10	3/4	3/4	1	4-3/4	4	3/16
IL50-10Gx4	IL50-10Sx4	3000	1-8	1	1	1	5	4	1/2
IL50-12Gx4	IL50-12Sx4	3000	1 1/4-7	1 1/4	1	1	5	4	1/2
IL52-5Gx4	IL52-5Sx4	500	5/16-18	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-6Gx4	IL52-6Sx4	1000	3/8-16	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-7Gx4	IL52-7Sx4	2000	1/2-13	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-8Gx4	IL52-8Sx4	3000	5/8-11	5/8	3/4	1-1/2	4-3/4	4	3/16
IL52-9Gx4	IL52-9Sx4	3000	3/4-10	3/4	3/4	1-1/2	4-3/4	4	3/16
IL52-10Gx4	IL52-10Sx4	3000	1-8	1	1	1-1/2	5	4	1/2
IL52-12Gx4	IL52-12Sx4	3000	1 1/4-7	1 1/4	1	1-1/2	5	4	1/2
IL54-5Gx4	IL54-5Sx4	500	5/16-18	1/2	3/4	2	4-3/4	4	3/16
IL54-6Gx4	IL54-6Sx4	1000	3/8-16	1/2	3/4	2	4-3/4	4	3/16
IL54-7Gx4	IL54-7Sx4	2000	1/2-13	1/2	3/4	2	4-3/4	4	3/16
IL54-8Gx4	IL54-8Sx4	3000	5/8-11	5/8	3/4	2	4-3/4	4	3/16
IL54-9Gx4	IL54-9Sx4	3000	3/4-10	3/4	3/4	2	4-3/4	4	3/16
IL54-10Gx4	IL54-10Sx4	3000	1-8	1	1	2	5	4	1/2
IL54-12Gx4	IL54-12Sx4	3000	1 1/4-7	1 1/4	1	2	5	4	1/2
IL56-5Gx4	IL56-5Sx4	500	5/16-18	1/2	3/4	3	4-3/4	4	3/16
IL56-6Gx4	IL56-6Sx4	1000	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL56-7Gx4	IL56-7Sx4	2000	1/2-13	1/2	3/4	3	4-3/4	4	3/16
IL56-8Gx4	IL56-8Sx4	3000	5/8-11	5/8	3/4	3	4-3/4	4	3/16
IL56-9Gx4	IL56-9Sx4	3000	3/4-10	3/4	3/4	3	4-3/4	4	3/16
IL56-10Gx4	IL56-10Sx4	3000	1-8	1	1	3	5	4	1/2
IL56-12Gx4	IL56-12Sx4	3000	1 1/4-7	1 1/4	1	3	5	4	1/2
IL58-5Gx4	IL58-5Sx4	500	5/16-18	1/2	3/4	4	4-3/4	4	3/16
IL58-6Gx4	IL58-6Sx4	1000	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL58-7Gx4	IL58-7Sx4	2000	1/2-13	1/2	3/4	4	4-3/4	4	3/16
IL58-8Gx4	IL58-8Sx4	3000	5/8-11	5/8	3/4	4	4-3/4	4	3/16
IL58-9Gx4	IL58-9Sx4	3000	3/4-10	3/4	3/4	4	4-3/4	4	3/16
IL58-10Gx4	IL58-10Sx4	3000	1-8	1	1	4	5	4	1/2
IL58-12Gx4	IL58-12Sx4	3000	1 1/4-7	1 1/4	1	4	5	4	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1 1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

5 INCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE POLY SWIVEL — 5" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-6Gx5	IL50-6Sx5	1000	3/8-16	1/2	3/4	1	5-3/4	5	3/16
IL50-7Gx5	IL50-7Sx5	2000	1/2-13	1/2	3/4	1	5-3/4	5	3/16
IL50-8Gx5	IL50-8Sx5	3000	5/8-11	5/8	3/4	1	5-3/4	5	3/16
IL50-9Gx5	IL50-9Sx5	3000	3/4-10	3/4	3/4	1	5-3/4	5	3/16
IL50-10Gx5	IL50-10Sx5	3000	1-8	1	1	1	6	5	1/2
IL50-12Gx5	IL50-12Sx5	3000	1 1/4-7	1-1/4	1	1	6	5	1/2
IL52-6Gx5	IL52-6Sx5	1000	3/8-16	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-7Gx5	IL52-7Sx5	2000	1/2-13	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-8Gx5	IL52-8Sx5	3000	5/8-11	5/8	3/4	1-1/2	5-3/4	5	3/16
IL52-9Gx5	IL52-9Sx5	3000	3/4-10	3/4	3/4	1-1/2	5-3/4	5	3/16
IL52-10Gx5	IL52-10Sx5	3000	1-8	1	1	1-1/2	6	5	1/2
IL52-12Gx5	IL52-12Sx5	3000	1 1/4-7	1-1/4	1	1-1/2	6	5	1/2
IL54-6Gx5	IL54-6Sx5	1000	3/8-16	1/2	3/4	2	5-3/4	5	3/16
IL54-7Gx5	IL54-7Sx5	2000	1/2-13	1/2	3/4	2	5-3/4	5	3/16
IL54-8Gx5	IL54-8Sx5	3000	5/8-11	5/8	3/4	2	5-3/4	5	3/16
IL54-9Gx5	IL54-9Sx5	3000	3/4-10	3/4	3/4	2	5-3/4	5	3/16
IL54-10Gx5	IL54-10Sx5	3000	1-8	1	1	2	6	5	1/2
IL54-12Gx5	IL54-12Sx5	3000	1 1/4-7	1-1/4	1	2	6	5	1/2
IL56-6Gx5	IL56-6Sx5	1000	3/8-16	1/2	3/4	3	5-3/4	5	3/16
IL56-7Gx5	IL56-7Sx5	2000	1/2-13	1/2	3/4	3	5-3/4	5	3/16
IL56-8Gx5	IL56-8Sx5	3000	5/8-11	5/8	3/4	3	5-3/4	5	3/16
IL56-9Gx5	IL56-9Sx5	3000	3/4-10	3/4	3/4	3	5-3/4	5	3/16
IL56-10Gx5	IL56-10Sx5	3000	1-8	1	1	3	6	5	1/2
IL56-12Gx5	IL56-12Sx5	3000	1 1/4-7	1-1/4	1	3	6	5	1/2
IL58-6Gx5	IL58-6Sx5	1000	3/8-16	1/2	3/4	4	5-3/4	5	3/16
IL58-7Gx5	IL58-7Sx5	2000	1/2-13	1/2	3/4	4	5-3/4	5	3/16
IL58-8Gx5	IL58-8Sx5	3000	5/8-11	5/8	3/4	4	5-3/4	5	3/16
IL58-9Gx5	IL58-9Sx5	3000	3/4-10	3/4	3/4	4	5-3/4	5	3/16
IL58-10Gx5	IL58-10Sx5	3000	1-8	1	1	4	6	5	1/2
IL58-12Gx5	IL58-12Sx5	3000	1 1/4-7	1-1/4	1	4	6	5	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

6 INCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS



The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE POLY SWIVEL — 6" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-6Gx6	IL50-6Sx6	1000	3/8-16	1/2	3/4	1	6-3/4	6	3/16
IL50-7Gx6	IL50-7Sx6	2000	1/2-13	1/2	3/4	1	6-3/4	6	3/16
IL50-8Gx6	IL50-8Sx6	3000	5/8-11	5/8	3/4	1	6-3/4	6	3/16
IL50-9Gx6	IL50-9Sx6	3000	3/4-10	3/4	3/4	1	6-3/4	6	3/16
IL50-10Gx6	IL50-10Sx6	3000	1-8	1	1	1	7	6	1/2
IL50-12Gx6	IL50-12Sx6	3000	1 1/4-7	1-1/4	1	1	7	6	1/2
IL52-6Gx6	IL52-6Sx6	1000	3/8-16	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-7Gx6	IL52-7Sx6	2000	1/2-13	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-8Gx6	IL52-8Sx6	3000	5/8-11	5/8	3/4	1-1/2	6-3/4	6	3/16
IL52-9Gx6	IL52-9Sx6	3000	3/4-10	3/4	3/4	1-1/2	6-3/4	6	3/16
IL52-10Gx6	IL52-10Sx6	3000	1-8	1	1	1-1/2	7	6	1/2
IL52-12Gx6	IL52-12Sx6	3000	1 1/4-7	1-1/4	1	1-1/2	7	6	1/2
IL54-6Gx6	IL54-6Sx6	1000	3/8-16	1/2	3/4	2	6-3/4	6	3/16
IL54-7Gx6	IL54-7Sx6	2000	1/2-13	1/2	3/4	2	6-3/4	6	3/16
IL54-8Gx6	IL54-8Sx6	3000	5/8-11	5/8	3/4	2	6-3/4	6	3/16
IL54-9Gx6	IL54-9Sx6	3000	3/4-10	3/4	3/4	2	6-3/4	6	3/16
IL54-10Gx6	IL54-10Sx6	3000	1-8	1	1	2	7	6	1/2
IL54-12Gx6	IL54-12Sx6	3000	1 1/4-7	1-1/4	1	2	7	6	1/2
IL56-6Gx6	IL56-6Sx6	1000	3/8-16	1/2	3/4	3	6-3/4	6	3/16
IL56-7Gx6	IL56-7Sx6	2000	1/2-13	1/2	3/4	3	6-3/4	6	3/16
IL56-8Gx6	IL56-8Sx6	3000	5/8-11	5/8	3/4	3	6-3/4	6	3/16
IL56-9Gx6	IL56-9Sx6	3000	3/4-10	3/4	3/4	3	6-3/4	6	3/16
IL56-10Gx6	IL56-10Sx6	3000	1-8	1	1	3	7	6	1/2
IL56-12Gx6	IL56-12Sx6	3000	1 1/4-7	1-1/4	1	3	7	6	1/2
IL58-6Gx6	IL58-6Sx6	1000	3/8-16	1/2	3/4	4	6-3/4	6	3/16
IL58-7Gx6	IL58-7Sx6	2000	1/2-13	1/2	3/4	4	6-3/4	6	3/16
IL58-8Gx6	IL58-8Sx6	3000	5/8-11	5/8	3/4	4	6-3/4	6	3/16
IL58-9Gx6	IL58-9Sx6	3000	3/4-10	3/4	3/4	4	6-3/4	6	3/16
IL58-10Gx6	IL58-10Sx6	3000	1-8	1	1	4	7	6	1/2
IL58-12Gx6	IL58-12Sx6	3000	1 1/4-7	1-1/4	1	4	7	6	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

8 INCH STUD

LOW-PROFILE POLY SWIVEL STUD LEVELERS



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE POLY SWIVEL — 8" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-7Gx8	IL50-7Sx8	2000	1/2-13	1/2	3/4	1	8-3/4	8	3/16
IL50-8Gx8	IL50-8Sx8	3000	5/8-11	5/8	3/4	1	8-3/4	8	3/16
IL50-9Gx8	IL50-9Sx8	3000	3/4-10	3/4	3/4	1	8-3/4	8	3/16
IL50-10Gx8	IL50-10Sx8	3000	1-8	1	1	1	9	8	1/2
IL50-12Gx8	IL50-12Sx8	3000	1 1/4-7	1-1/4	1	1	9	8	1/2
IL52-7Gx8	IL52-7Sx8	2000	1/2-13	1/2	3/4	1-1/2	8-3/4	8	3/16
IL52-8Gx8	IL52-8Sx8	3000	5/8-11	5/8	3/4	1-1/2	8-3/4	8	3/16
IL52-9Gx8	IL52-9Sx8	3000	3/4-10	3/4	3/4	1-1/2	8-3/4	8	3/16
IL52-10Gx8	IL52-10Sx8	3000	1-8	1	1	1-1/2	9	8	1/2
IL52-12Gx8	IL52-12Sx8	3000	1 1/4-7	1-1/4	1	1-1/2	9	8	1/2
IL54-7Gx8	IL54-7Sx8	2000	1/2-13	1/2	3/4	2	8-3/4	8	3/16
IL54-8Gx8	IL54-8Sx8	3000	5/8-11	5/8	3/4	2	8-3/4	8	3/16
IL54-9Gx8	IL54-9Sx8	3000	3/4-10	3/4	3/4	2	8-3/4	8	3/16
IL54-10Gx8	IL54-10Sx8	3000	1-8	1	1	2	9	8	1/2
IL54-12Gx8	IL54-12Sx8	3000	1 1/4-7	1-1/4	1	2	9	8	1/2
IL56-7Gx8	IL56-7Sx8	2000	1/2-13	1/2	3/4	3	8-3/4	8	3/16
IL56-8Gx8	IL56-8Sx8	3000	5/8-11	5/8	3/4	3	8-3/4	8	3/16
IL56-9Gx8	IL56-9Sx8	3000	3/4-10	3/4	3/4	3	8-3/4	8	3/16
IL56-10Gx8	IL56-10Sx8	3000	1-8	1	1	3	9	8	1/2
IL56-12Gx8	IL56-12Sx8	3000	1 1/4-7	1-1/4	1	3	9	8	1/2
IL58-7Gx8	IL58-7Sx8	2000	1/2-13	1/2	3/4	4	8-3/4	8	3/16
IL58-8Gx8	IL58-8Sx8	3000	5/8-11	5/8	3/4	4	8-3/4	8	3/16
IL58-9Gx8	IL58-9Sx8	3000	3/4-10	3/4	3/4	4	8-3/4	8	3/16
IL58-10Gx8	IL58-10Sx8	3000	1-8	1	1	4	9	8	1/2
IL58-12Gx8	IL58-12Sx8	3000	1 1/4-7	1-1/4	1	4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 1&2 INCH STUD

**LOW-PROFILE METRIC POLY SWIVEL
STUD LEVELERS**



The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- M6 & M8 available in 1" (25mm) length
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 2 " STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M6Gx1	IL50-M6Sx1	100	M6X1	1/2	3/4	1	1-3/4	1	3/16
IL50-M8Gx1	IL50-M8Sx1	500	M8X1.25	1/2	3/4	1	1-3/4	1	3/16
IL50-M6G	IL50-M6S	100	M6X1	1/2	3/4	1	2-3/4	2	3/16
IL50-M8G	IL50-M8S	500	M8X1.25	1/2	3/4	1	2-3/4	2	3/16
IL50-M10G	IL50-M10S	1000	M10X1.50	1/2	3/4	1	2-3/4	2	3/16
IL50-M12G	IL50-M12S	2000	M12X1.75	1/2	3/4	1	2-3/4	2	3/16
IL50-M16G	IL50-M16S	3000	M16X2.00	5/8	3/4	1	2-3/4	2	3/16
IL50-M20G	IL50-M20S	3000	M20X2.50	3/4	3/4	1	2-3/4	2	3/16
IL50-M24G	IL50-M24S	3000	M24X3.00	1	1	1	3	2	1/2
IL52-M6Gx1	IL52-M6Sx1	100	M6X1	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-M8Gx1	IL52-M8Sx1	500	M8X1.25	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-M6G	IL52-M6S	100	M6X1	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M8G	IL52-M8S	500	M8X1.25	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M10G	IL52-M10S	1000	M10X1.50	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M12G	IL52-M12S	2000	M12X1.75	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M16G	IL52-M16S	3000	M16X2.00	5/8	3/4	1-1/2	2-3/4	2	3/16
IL52-M20G	IL52-M20S	3000	M20X2.50	3/4	3/4	1-1/2	2-3/4	2	3/16
IL52-M24G	IL52-M24S	3000	M24X3.00	1	1	1-1/2	3	2	1/2
IL54-M6Gx1	IL54-M6Sx1	100	M6X1	1/2	3/4	2	1-3/4	1	3/16
IL54-M8Gx1	IL54-M8Sx1	500	M8X1.25	1/2	3/4	2	1-3/4	1	3/16
IL54-M6G	IL54-M6S	100	M6X1	1/2	3/4	2	2-3/4	2	3/16
IL54-M8G	IL54-M8S	500	M8X1.25	1/2	3/4	2	2-3/4	2	3/16
IL54-M10G	IL54-M10S	1000	M10X1.50	1/2	3/4	2	2-3/4	2	3/16
IL54-M12G	IL54-M12S	2000	M12X1.75	1/2	3/4	2	2-3/4	2	3/16
IL54-M16G	IL54-M16S	3000	M16X2.00	5/8	3/4	2	2-3/4	2	3/16
IL54-M20G	IL54-M20S	3000	M20X2.50	3/4	3/4	2	2-3/4	2	3/16
IL54-M24G	IL54-M24S	3000	M24X3.00	1	1	2	3	2	1/2
IL56-M6Gx1	IL56-M6Sx1	100	M6X1	1/2	3/4	3	1-3/4	1	3/16
IL56-M8Gx1	IL56-M8Sx1	500	M8X1.25	1/2	3/4	3	1-3/4	1	3/16
IL56-M6G	IL56-M6S	100	M6X1	1/2	3/4	3	2-3/4	2	3/16
IL56-M8G	IL56-M8S	500	M8X1.25	1/2	3/4	3	2-3/4	2	3/16
IL56-M10G	IL56-M10S	1000	M10X1.50	1/2	3/4	3	2-3/4	2	3/16
IL56-M12G	IL56-M12S	2000	M12X1.75	1/2	3/4	3	2-3/4	2	3/16
IL56-M16G	IL56-M16S	3000	M16X2.00	5/8	3/4	3	2-3/4	2	3/16
IL56-M20G	IL56-M20S	3000	M20X2.50	3/4	3/4	3	2-3/4	2	3/16
IL56-M24G	IL56-M24S	3000	M24X3.00	1	1	3	3	2	1/2
IL58-M6Gx1	IL58-M6Sx1	100	M6X1	1/2	3/4	4	1-3/4	1	3/16
IL58-M8Gx1	IL58-M8Sx1	500	M8X1.25	1/2	3/4	4	1-3/4	1	3/16
IL58-M6G	IL58-M6S	100	M6X1	1/2	3/4	4	2-3/4	2	3/16
IL58-M8G	IL58-M8S	500	M8X1.25	1/2	3/4	4	2-3/4	2	3/16
IL58-M10G	IL58-M10S	1000	M10X1.50	1/2	3/4	4	2-3/4	2	3/16
IL58-M12G	IL58-M12S	2000	M12X1.75	1/2	3/4	4	2-3/4	2	3/16
IL58-M16G	IL58-M16S	3000	M16X2.00	5/8	3/4	4	2-3/4	2	3/16
IL58-M20G	IL58-M20S	3000	M20X2.50	3/4	3/4	4	2-3/4	2	3/16
IL58-M24G	IL58-M24S	3000	M24X3.00	1	1	4	3	2	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 3 INCH STUD

**LOW-PROFILE METRIC POLY SWIVEL
STUD LEVELERS**



The IEC Poly Base and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 3" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M6Gx3	IL50-M6Sx3	100	M6X1	1/2	3/4	1	3-3/4	3	3/16
IL50-M8Gx3	IL50-M8Sx3	500	M8X1.25	1/2	3/4	1	3-3/4	3	3/16
IL50-M10Gx3	IL50-M10Sx3	1000	M10X1.50	1/2	3/4	1	3-3/4	3	3/16
IL50-M12Gx3	IL50-M12Sx3	2000	M12X1.75	1/2	3/4	1	3-3/4	3	3/16
IL50-M16Gx3	IL50-M16Sx3	3000	M16X2.00	5/8	3/4	1	3-3/4	3	3/16
IL50-M20Gx3	IL50-M20Sx3	3000	M20X2.50	3/4	3/4	1	3-3/4	3	3/16
IL50-M24Gx3	IL50-M24Sx3	3000	M24X3.00	1	1	1	4	3	1/2
IL52-M6Gx3	IL52-M6Sx3	100	M6X1	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M8Gx3	IL52-M8Sx3	500	M8X1.25	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M10Gx3	IL52-M10Sx3	1000	M10X1.50	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M12Gx3	IL52-M12Sx3	2000	M12X1.75	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M16Gx3	IL52-M16Sx3	3000	M16X2.00	5/8	3/4	1-1/2	3-3/4	3	3/16
IL52-M20Gx3	IL52-M20Sx3	3000	M20X2.50	3/4	3/4	1-1/2	3-3/4	3	3/16
IL52-M24Gx3	IL52-M24Sx3	3000	M24X3.00	1	1	1-1/2	4	3	1/2
IL54-M6Gx3	IL54-M6Sx3	100	M6X1	1/2	3/4	2	3-3/4	3	3/16
IL54-M8Gx3	IL54-M8Sx3	500	M8X1.25	1/2	3/4	2	3-3/4	3	3/16
IL54-M10Gx3	IL54-M10Sx3	1000	M10X1.50	1/2	3/4	2	3-3/4	3	3/16
IL54-M12Gx3	IL54-M12Sx3	2000	M12X1.75	1/2	3/4	2	3-3/4	3	3/16
IL54-M16Gx3	IL54-M16Sx3	3000	M16X2.00	5/8	3/4	2	3-3/4	3	3/16
IL54-M20Gx3	IL54-M20Sx3	3000	M20X2.50	3/4	3/4	2	3-3/4	3	3/16
IL54-M24Gx3	IL54-M24Sx3	3000	M24X3.00	1	1	2	4	3	1/2
IL56-M6Gx3	IL56-M6Sx3	100	M6X1	1/2	3/4	3	3-3/4	3	3/16
IL56-M8Gx3	IL56-M8Sx3	500	M8X1.25	1/2	3/4	3	3-3/4	3	3/16
IL56-M10Gx3	IL56-M10Sx3	1000	M10X1.50	1/2	3/4	3	3-3/4	3	3/16
IL56-M12Gx3	IL56-M12Sx3	2000	M12X1.75	1/2	3/4	3	3-3/4	3	3/16
IL56-M16Gx3	IL56-M16Sx3	3000	M16X2.00	5/8	3/4	3	3-3/4	3	3/16
IL56-M20Gx3	IL56-M20Sx3	3000	M20X2.50	3/4	3/4	3	3-3/4	3	3/16
IL56-M24Gx3	IL56-M24Sx3	3000	M24X3.00	1	1	3	4	3	1/2
IL58-M6Gx3	IL58-M6Sx3	100	M6X1	1/2	3/4	4	3-3/4	3	3/16
IL58-M8Gx3	IL58-M8Sx3	500	M8X1.25	1/2	3/4	4	3-3/4	3	3/16
IL58-M10Gx3	IL58-M10Sx3	1000	M10X1.50	1/2	3/4	4	3-3/4	3	3/16
IL58-M12Gx3	IL58-M12Sx3	2000	M12X1.75	1/2	3/4	4	3-3/4	3	3/16
IL58-M16Gx3	IL58-M16Sx3	3000	M16X2.00	5/8	3/4	4	3-3/4	3	3/16
IL58-M20Gx3	IL58-M20Sx3	3000	M20X2.50	3/4	3/4	4	3-3/4	3	3/16
IL58-M24Gx3	IL58-M24Sx3	3000	M24X3.00	1	1	4	4	3	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 4 INCH STUD

**LOW-PROFILE METRIC POLY SWIVEL
STUD LEVELERS**



The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 4" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M8Gx4	IL50-M8Sx4	500	M8X1.25	1/2	3/4	1	4-3/4	4	3/16
IL50-M10Gx4	IL50-M10Sx4	1000	M10X1.50	1/2	3/4	1	4-3/4	4	3/16
IL50-M12Gx4	IL50-M12Sx4	2000	M12X1.75	1/2	3/4	1	4-3/4	4	3/16
IL50-M16Gx4	IL50-M16Sx4	3000	M16X2.00	5/8	3/4	1	4-3/4	4	3/16
IL50-M20Gx4	IL50-M20Sx4	3000	M20X2.50	3/4	3/4	1	4-3/4	4	3/16
IL50-M24Gx4	IL50-M24Sx4	3000	M24X3.00	1	1	1	5	4	1/2
IL52-M8Gx4	IL52-M8Sx4	500	M8X1.25	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M10Gx4	IL52-M10Sx4	1000	M10X1.50	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M12Gx4	IL52-M12Sx4	2000	M12X1.75	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M16Gx4	IL52-M16Sx4	3000	M16X2.00	5/8	3/4	1-1/2	4-3/4	4	3/16
IL52-M20Gx4	IL52-M20Sx4	3000	M20X2.50	3/4	3/4	1-1/2	4-3/4	4	3/16
IL52-M24Gx4	IL52-M24Sx4	3000	M24X3.00	1	1	1-1/2	5	4	1/2
IL54-M8Gx4	IL54-M8Sx4	500	M8X1.25	1/2	3/4	2	4-3/4	4	3/16
IL54-M10Gx4	IL54-M10Sx4	1000	M10X1.50	1/2	3/4	2	4-3/4	4	3/16
IL54-M12Gx4	IL54-M12Sx4	2000	M12X1.75	1/2	3/4	2	4-3/4	4	3/16
IL54-M16Gx4	IL54-M16Sx4	3000	M16X2.00	5/8	3/4	2	4-3/4	4	3/16
IL54-M20Gx4	IL54-M20Sx4	3000	M20X2.50	3/4	3/4	2	4-3/4	4	3/16
IL54-M24Gx4	IL54-M24Sx4	3000	M24X3.00	1	1	2	5	4	1/2
IL56-M8Gx4	IL56-M8Sx4	500	M8X1.25	1/2	3/4	3	4-3/4	4	3/16
IL56-M10Gx4	IL56-M10Sx4	1000	M10X1.50	1/2	3/4	3	4-3/4	4	3/16
IL56-M12Gx4	IL56-M12Sx4	2000	M12X1.75	1/2	3/4	3	4-3/4	4	3/16
IL56-M16Gx4	IL56-M16Sx4	3000	M16X2.00	5/8	3/4	3	4-3/4	4	3/16
IL56-M20Gx4	IL56-M20Sx4	3000	M20X2.50	3/4	3/4	3	4-3/4	4	3/16
IL56-M24Gx4	IL56-M24Sx4	3000	M24X3.00	1	1	3	5	4	1/2
IL58-M8Gx4	IL58-M8Sx4	500	M8X1.25	1/2	3/4	4	4-3/4	4	3/16
IL58-M10Gx4	IL58-M10Sx4	1000	M10X1.50	1/2	3/4	4	4-3/4	4	3/16
IL58-M12Gx4	IL58-M12Sx4	2000	M12X1.75	1/2	3/4	4	4-3/4	4	3/16
IL58-M16Gx4	IL58-M16Sx4	3000	M16X2.00	5/8	3/4	4	4-3/4	4	3/16
IL58-M20Gx4	IL58-M20Sx4	3000	M20X2.50	3/4	3/4	4	4-3/4	4	3/16
IL58-M24Gx4	IL58-M24Sx4	3000	M24X3.00	1	1	4	5	4	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 5 INCH STUD

**LOW-PROFILE METRIC POLY SWIVEL
STUD LEVELERS**



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 5" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M10Gx5	IL50-M10Sx5	1000	M10X1.50	1/2	3/4	1	5-3/4	5	3/16
IL50-M12Gx5	IL50-M12Sx5	2000	M12X1.75	1/2	3/4	1	5-3/4	5	3/16
IL50-M16Gx5	IL50-M16Sx5	3000	M16X2.00	5/8	3/4	1	5-3/4	5	3/16
IL50-M20Gx5	IL50-M20Sx5	3000	M20X2.50	3/4	3/4	1	5-3/4	5	3/16
IL50-M24Gx5	IL50-M24Sx5	3000	M24X3.00	1	1	1	6	5	1/2
IL52-M10Gx5	IL52-M10Sx5	1000	M10X1.50	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-M12Gx5	IL52-M12Sx5	2000	M12X1.75	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-M16Gx5	IL52-M16Sx5	3000	M16X2.00	5/8	3/4	1-1/2	5-3/4	5	3/16
IL52-M20Gx5	IL52-M20Sx5	3000	M20X2.50	3/4	3/4	1-1/2	5-3/4	5	3/16
IL52-M24Gx5	IL52-M24Sx5	3000	M24X3.00	1	1	1-1/2	6	5	1/2
IL54-M10Gx5	IL54-M10Sx5	1000	M10X1.50	1/2	3/4	2	5-3/4	5	3/16
IL54-M12Gx5	IL54-M12Sx5	2000	M12X1.75	1/2	3/4	2	5-3/4	5	3/16
IL54-M16Gx5	IL54-M16Sx5	3000	M16X2.00	5/8	3/4	2	5-3/4	5	3/16
IL54-M20Gx5	IL54-M20Sx5	3000	M20X2.50	3/4	3/4	2	5-3/4	5	3/16
IL54-M24Gx5	IL54-M24Sx5	3000	M24X3.00	1	1	2	6	5	1/2
IL56-M10Gx5	IL56-M10Sx5	1000	M10X1.50	1/2	3/4	3	5-3/4	5	3/16
IL56-M12Gx5	IL56-M12Sx5	2000	M12X1.75	1/2	3/4	3	5-3/4	5	3/16
IL56-M16Gx5	IL56-M16Sx5	3000	M16X2.00	5/8	3/4	3	5-3/4	5	3/16
IL56-M20Gx5	IL56-M20Sx5	3000	M20X2.50	3/4	3/4	3	5-3/4	5	3/16
IL56-M24Gx5	IL56-M24Sx5	3000	M24X3.00	1	1	3	6	5	1/2
IL58-M10Gx5	IL58-M10Sx5	1000	M10X1.50	1/2	3/4	4	5-3/4	5	3/16
IL58-M12Gx5	IL58-M12Sx5	2000	M12X1.75	1/2	3/4	4	5-3/4	5	3/16
IL58-M16Gx5	IL58-M16Sx5	3000	M16X2.00	5/8	3/4	4	5-3/4	5	3/16
IL58-M20Gx5	IL58-M20Sx5	3000	M20X2.50	3/4	3/4	4	5-3/4	5	3/16
IL58-M24Gx5	IL58-M24Sx5	3000	M24X3.00	1	1	4	6	5	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 6 INCH STUD

**LOW-PROFILE METRIC POLY SWIVEL
STUD LEVELERS**



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 6" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M10Gx6	IL50-M10Sx6	1000	M10X1.50	1/2	3/4	1	6-3/4	6	3/16
IL50-M12Gx6	IL50-M12Sx6	2000	M12X1.75	1/2	3/4	1	6-3/4	6	3/16
IL50-M16Gx6	IL50-M16Sx6	3000	M16X2.00	5/8	3/4	1	6-3/4	6	3/16
IL50-M20Gx6	IL50-M20Sx6	3000	M20X2.50	3/4	3/4	1	6-3/4	6	3/16
IL50-M24Gx6	IL50-M24Sx6	3000	M24X3.00	1	1	1	7	6	1/2
IL52-M10Gx6	IL52-M10Sx6	1000	M10X1.50	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-M12Gx6	IL52-M12Sx6	2000	M12X1.75	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-M16Gx6	IL52-M16Sx6	3000	M16X2.00	5/8	3/4	1-1/2	6-3/4	6	3/16
IL52-M20Gx6	IL52-M20Sx6	3000	M20X2.50	3/4	3/4	1-1/2	6-3/4	6	3/16
IL52-M24Gx6	IL52-M24Sx6	3000	M24X3.00	1	1	1-1/2	7	6	1/2
IL54-M10Gx6	IL54-M10Sx6	1000	M10X1.50	1/2	3/4	2	6-3/4	6	3/16
IL54-M12Gx6	IL54-M12Sx6	2000	M12X1.75	1/2	3/4	2	6-3/4	6	3/16
IL54-M16Gx6	IL54-M16Sx6	3000	M16X2.00	5/8	3/4	2	6-3/4	6	3/16
IL54-M20Gx6	IL54-M20Sx6	3000	M20X2.50	3/4	3/4	2	6-3/4	6	3/16
IL54-M24Gx6	IL54-M24Sx6	3000	M24X3.00	1	1	2	7	6	1/2
IL56-M10Gx6	IL56-M10Sx6	1000	M10X1.50	1/2	3/4	3	6-3/4	6	3/16
IL56-M12Gx6	IL56-M12Sx6	2000	M12X1.75	1/2	3/4	3	6-3/4	6	3/16
IL56-M16Gx6	IL56-M16Sx6	3000	M16X2.00	5/8	3/4	3	6-3/4	6	3/16
IL56-M20Gx6	IL56-M20Sx6	3000	M20X2.50	3/4	3/4	3	6-3/4	6	3/16
IL56-M24Gx6	IL56-M24Sx6	3000	M24X3.00	1	1	3	7	6	1/2
IL58-M10Gx6	IL58-M10Sx6	1000	M10X1.50	1/2	3/4	4	6-3/4	6	3/16
IL58-M12Gx6	IL58-M12Sx6	2000	M12X1.75	1/2	3/4	4	6-3/4	6	3/16
IL58-M16Gx6	IL58-M16Sx6	3000	M16X2.00	5/8	3/4	4	6-3/4	6	3/16
IL58-M20Gx6	IL58-M20Sx6	3000	M20X2.50	3/4	3/4	4	6-3/4	6	3/16
IL58-M24Gx6	IL58-M24Sx6	3000	M24X3.00	1	1	4	7	6	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY SWIVEL

METRIC 8 INCH STUD

**LOW-PROFILE METRIC POLY SWIVEL
STUD LEVELERS**



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**LOW PROFILE METRIC POLY SWIVEL — 8" STUD LENGTHS**

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M12Gx8	IL50-M12Sx8	2000	M12X1.75	1/2	3/4	1	8-3/4	8	3/16
IL50-M16Gx8	IL50-M16Sx8	3000	M16X2.00	5/8	3/4	1	8-3/4	8	3/16
IL50-M20Gx8	IL50-M20Sx8	3000	M20X2.50	3/4	3/4	1	8-3/4	8	3/16
IL50-M24Gx8	IL50-M24Sx8	3000	M24X3.00	1	1	1	9	8	1/2
IL52-M12Gx8	IL52-M12Sx8	2000	M12X1.75	1/2	3/4	1-1/2	8-3/4	8	3/16
IL52-M16Gx8	IL52-M16Sx8	3000	M16X2.00	5/8	3/4	1-1/2	8-3/4	8	3/16
IL52-M20Gx8	IL52-M20Sx8	3000	M20X2.50	3/4	3/4	1-1/2	8-3/4	8	3/16
IL52-M24Gx8	IL52-M24Sx8	3000	M24X3.00	1	1	1-1/2	9	8	1/2
IL54-M12Gx8	IL54-M12Sx8	2000	M12X1.75	1/2	3/4	2	8-3/4	8	3/16
IL54-M16Gx8	IL54-M16Sx8	3000	M16X2.00	5/8	3/4	2	8-3/4	8	3/16
IL54-M20Gx8	IL54-M20Sx8	3000	M20X2.50	3/4	3/4	2	8-3/4	8	3/16
IL54-M24Gx8	IL54-M24Sx8	3000	M24X3.00	1	1	2	9	8	1/2
IL56-M12Gx8	IL56-M12Sx8	2000	M12X1.75	1/2	3/4	3	8-3/4	8	3/16
IL56-M16Gx8	IL56-M16Sx8	3000	M16X2.00	5/8	3/4	3	8-3/4	8	3/16
IL56-M20Gx8	IL56-M20Sx8	3000	M20X2.50	3/4	3/4	3	8-3/4	8	3/16
IL56-M24Gx8	IL56-M24Sx8	3000	M24X3.00	1	1	3	9	8	1/2
IL58-M12Gx8	IL58-M12Sx8	2000	M12X1.75	1/2	3/4	4	8-3/4	8	3/16
IL58-M16Gx8	IL58-M16Sx8	3000	M16X2.00	5/8	3/4	4	8-3/4	8	3/16
IL58-M20Gx8	IL58-M20Sx8	3000	M20X2.50	3/4	3/4	4	8-3/4	8	3/16
IL58-M24Gx8	IL58-M24Sx8	3000	M24X3.00	1	1	4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY FIXED STUD

POLY BASE FIXED STUD GLIDES


The IEC *Poly Base Steel and Stainless Steel Fixed Stud Glide* is ideal for medium-duty load requirements. The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR)




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

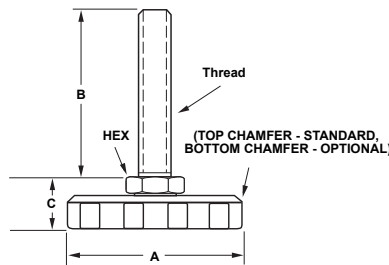

Optional bottom chamfer (reverse assembly) – with 90° top edge

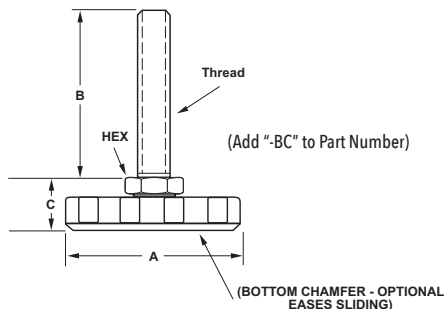

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7-4Bx1/2	IL7-4BSx1/2	100	1/4-20	1/2	1	1/2	11/16
IL7-4Bx1	IL7-4BSx1	100	1/4-20	1/2	1	1	11/16
IL7-4B	IL7-4BS	100	1/4-20	1/2	1	1-9/16	11/16
IL7-4Bx2-HX	IL7-4BSx2-HX	100	1/4-20	1/2	1	2	11/16
IL7-4Bx2.5	IL7-4BSx2.5	100	1/4-20	1/2	1	2-1/2	11/16
IL7-5Bx3/4	IL7-5BSx3/4	500	5/16-18	1/2	1	3/4	11/16
IL7-5Bx1.5-HX	IL7-5BSx1.5-HX	500	5/16-18	1/2	1	1-1/2	11/16
IL7-5B	IL7-5BS	500	5/16-18	1/2	1	1-9/16	11/16
IL7-5Bx2.5-HX	IL7-5BSx2.5-HX	500	5/16-18	1/2	1	2-1/2	11/16
IL7-5Bx3	IL7-5BSx3	500	5/16-18	1/2	1	3	11/16
IL7-5Bx4	IL7-5BSx4	500	5/16-18	1/2	1	4	11/16
IL7-6Bx3/4	IL7-6BSx3/4	1000	3/8-16	1/2	1	3/4	11/16
IL7-6Bx1.5-HX	IL7-6BSx1.5-HX	1000	3/8-16	1/2	1	1-1/2	11/16
IL7-6B	IL7-6BS	1000	3/8-16	1/2	1	1-9/16	11/16
IL7-6Bx1	IL7-6BSx1	1000	3/8-16	1/2	1	1	11/16
IL7-6Bx2	IL7-6BSx2	1000	3/8-16	1/2	1	2	11/16
IL7-6Bx2-HX	IL7-6BSx2-HX	1000	3/8-16	1/2	1	2	11/16
IL7-6Bx3	IL7-6BSx3	1000	3/8-16	1/2	1	3	11/16
IL7-6Bx3-HX	IL7-6BSx3-HX	1000	3/8-16	1/2	1	3	11/16
IL7-6Bx4	IL7-6BSx4	1000	3/8-16	1/2	1	4	11/16
IL7-6Bx4.5-HX	IL7-6BSx4.5-HX	1000	3/8-16	1/2	1	4-1/2	11/16
IL7-6Bx6-HX	IL7-6BSx6-HX	1000	3/8-16	1/2	1	6	11/16
IL7-6FBx1	IL7-6FBSx1	1000	3/8-24	1/2	1	1	11/16
IL7-6FBx2	IL7-6FBSx2	1000	3/8-24	1/2	1	2	11/16
IL7-7B	IL7-7BS	2000	1/2-13	1/2	1	1-9/16	11/16
IL7-7Bx2	IL7-7BSx2	2000	1/2-13	1/2	1	2	11/16
IL7-7Bx2-HX	IL7-7BSx2-HX	2000	1/2-13	1/2	1	2	11/16
IL7-7Bx2.5-HX	IL7-7BSx2.5-HX	2000	1/2-13	1/2	1	2-1/2	11/16
IL7-7Bx3	IL7-7BSx3	2000	1/2-13	1/2	1	3	11/16
IL7-7Bx3-HX	IL7-7BSx3-HX	2000	1/2-13	1/2	1	3	11/16
IL7-7Bx3.5-HX	IL7-7BSx3.5-HX	2000	1/2-13	1/2	1	3-1/2	11/16
IL7-7Bx4	IL7-7BSx4	2000	1/2-13	1/2	1	4	11/16
IL7-7Bx4-HX	IL7-7BSx4-HX	2000	1/2-13	1/2	1	4	11/16
IL7-7Bx5	IL7-7BSx5	2000	1/2-13	1/2	1	5	11/16
IL7-7Bx5-HX	IL7-7BSx5-HX	2000	1/2-13	1/2	1	5	11/16
IL7-7Bx6-HX	IL7-7BSx6-HX	1500	1/2-13	1/2	1	6	11/16
IL7-7Bx8-HX	IL7-7BSx8-HX	1000	1/2-13	1/2	1	8	11/16
IL7-7FBx1	IL7-7FBSx1	2000	1/2-20	1/2	1	1	11/16
IL7-7FBx2	IL7-7FBSx2	2000	1/2-20	1/2	1	2	11/16
IL7-7FBx4	IL7-7FBSx4	2000	1/2-20	1/2	1	4	11/16
IL7-8B	IL7-8BS	2500	5/8-11	5/8	1	1-9/16	11/16
IL7-8Bx3	IL7-8BSx3	2500	5/8-11	5/8	1	3	11/16
IL7-8Bx4	IL7-8BSx4	2500	5/8-11	5/8	1	4	11/16
IL7-8Bx5	IL7-8BSx5	2500	5/8-11	5/8	1	5	11/16
IL7-9B	IL7-9BS	3000	3/4-10	3/4	1	1-9/16	11/16
IL7-9Bx3	IL7-9BSx3	3000	3/4-10	3/4	1	3	11/16
IL7-9Bx4	IL7-9BSx4	3000	3/4-10	3/4	1	4	11/16
IL8-4Bx1/2	IL8-4BSx1/2	100	1/4-20	1/2	1-1/2	1/2	11/16
IL8-4Bx1	IL8-4BSx1	100	1/4-20	1/2	1-1/2	1	11/16
IL8-4B	IL8-4BS	100	1/4-20	1/2	1-1/2	1-9/16	11/16
IL8-4Bx2-HX	IL8-4BSx2-HX	100	1/4-20	1/2	1-1/2	2	11/16
IL8-4Bx2.5	IL8-4BSx2.5	100	1/4-20	1/2	1-1/2	2-1/2	11/16
IL8-5Bx3/4	IL8-5BSx3/4	500	5/16-18	1/2	1-1/2	3/4	11/16
IL8-5Bx1.5-HX	IL8-5BSx1.5-HX	500	5/16-18	1/2	1-1/2	1-1/2	11/16
IL8-5B	IL8-5BS	500	5/16-18	1/2	1-1/2	1-9/16	11/16
IL8-5Bx2.5-HX	IL8-5BSx2.5-HX	500	5/16-18	1/2	1-1/2	2-1/2	11/16
IL8-5Bx3	IL8-5BSx3	500	5/16-18	1/2	1-1/2	3	11/16
IL8-5Bx4	IL8-5BSx4	500	5/16-18	1/2	1-1/2	4	11/16
IL8-6Bx3/4	IL8-6BSx3/4	1000	3/8-16	1/2	1-1/2	3/4	11/16
IL8-6Bx1.5-HX	IL8-6BSx1.5-HX	1000	3/8-16	1/2	1-1/2	1-1/2	11/16
IL8-6B	IL8-6BS	1000	3/8-16	1/2	1-1/2	1-9/16	11/16
IL8-6Bx1	IL8-6BSx1	1000	3/8-16	1/2	1-1/2	1	11/16
IL8-6Bx2	IL8-6BSx2	1000	3/8-16	1/2	1-1/2	2	11/16
IL8-6Bx2-HX	IL8-6BSx2-HX	1000	3/8-16	1/2	1-1/2	2	11/16
IL8-6Bx3	IL8-6BSx3	1000	3/8-16	1/2	1-1/2	3	11/16
IL8-6Bx3-HX	IL8-6BSx3-HX	1000	3/8-16	1/2	1-1/2	3	11/16
IL8-6Bx4	IL8-6BSx4	1000	3/8-16	1/2	1-1/2	4	11/16
IL8-6Bx4.5-HX	IL8-6BSx4.5-HX	1000	3/8-16	1/2	1-1/2	4-1/2	11/16
IL8-6Bx6-HX	IL8-6BSx6-HX	1000	3/8-16	1/2	1-1/2	6	11/16
IL8-6FBx1	IL8-6FBSx1	1000	3/8-24	1/2	1-1/2	1	11/16
IL8-6FBx2	IL8-6FBSx2	1000	3/8-24	1/2	1-1/2	2	11/16
IL8-7B	IL8-7BS	2000	1/2-13	1/2	1-1/2	1-9/16	11/16
IL8-7Bx2	IL8-7BSx2	2000	1/2-13	1/2	1-1/2	2	11/16
IL8-7Bx2-HX	IL8-7BSx2-HX	2000	1/2-13	1/2	1-1/2	2	11/16
IL8-7Bx2.5-HX	IL8-7BSx2.5-HX	2000	1/2-13	1/2	1-1/2	2-1/2	11/16
IL8-7Bx3	IL8-7BSx3	2000	1/2-13	1/2	1-1/2	3	11/16
IL8-7Bx3-HX	IL8-7BSx3-HX	2000	1/2-13	1/2	1-1/2	3	11/16
IL8-7Bx3.5-HX	IL8-7BSx3.5-HX	2000	1/2-13	1/2	1-1/2	3-1/2	11/16
IL8-7Bx4	IL8-7BSx4	2000	1/2-13	1/2	1-1/2	4	11/16
IL8-7Bx4-HX	IL8-7BSx4-HX	2000	1/2-13	1/2	1-1/2	4	11/16
IL8-7Bx5	IL8-7BSx5	2000	1/2-13	1/2	1-1/2	5	11/16
IL8-7Bx5-HX	IL8-7BSx5-HX	2000	1/2-13	1/2	1-1/2	5	11/16
IL8-7Bx6-HX	IL8-7BSx6-HX	1500	1/2-13	1/2	1-1/2	6	11/16
IL8-7Bx8-HX	IL8-7BSx8-HX	1000	1/2-13	1/2	1-1/2	8	11/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY BASE FIXED STUD WITH RUBBER PAD

POLY BASE FIXED STUD GLIDES WITH RUBBER PAD


The IEC Poly Base Steel and Stainless Steel Fixed Stud Glide with Rubber Pad is ideal for medium-duty load requirements. The rubber pad provides a non-skid, surface protecting feature, while the stud tilts several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

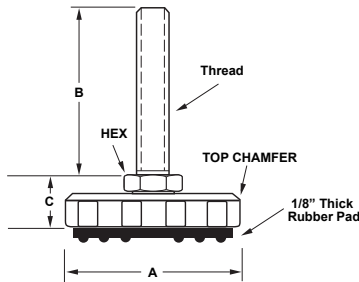

Rubber Pad Bottom View

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7-4Bx1/2-P	IL7-4BSx1/2-P	100	1/4-20	1/2	1	1/2	11/16
IL7-4Bx1-P	IL7-4BSx1-P	100	1/4-20	1/2	1	1	11/16
IL7-4B-P	IL7-4BS-P	100	1/4-20	1/2	1	1-9/16	11/16
IL7-4Bx2-HX-P	IL7-4BSx2-HX-P	100	1/4-20	1/2	1	2	11/16
IL7-4Bx25-P	IL7-4BSx25-P	100	1/4-20	1/2	1	2-1/2	11/16
IL7-5Bx3/4-P	IL7-5BSx3/4-P	500	5/16-18	1/2	1	3/4	11/16
IL7-5Bx15-HX-P	IL7-5BSx15-HX-P	500	5/16-18	1/2	1	1-1/2	11/16
IL7-5B-P	IL7-5BS-P	500	5/16-18	1/2	1	1-9/16	11/16
IL7-5Bx25-HX-P	IL7-5BSx25-HX-P	500	5/16-18	1/2	1	2-1/2	11/16
IL7-5Bx3-P	IL7-5BSx3-P	500	5/16-18	1/2	1	3	11/16
IL7-5Bx4-P	IL7-5BSx4-P	500	5/16-18	1/2	1	4	11/16
IL7-6Bx3/4-P	IL7-6BSx3/4-P	1000	3/8-16	1/2	1	3/4	11/16
IL7-6Bx15-HX-P	IL7-6BSx15-HX-P	1000	3/8-16	1/2	1	1-1/2	11/16
IL7-6B-P	IL7-6BS-P	1000	3/8-16	1/2	1	1-9/16	11/16
IL7-6Bx1-P	IL7-6BSx1-P	1000	3/8-16	1/2	1	1	11/16
IL7-6Bx2-P	IL7-6BSx2-P	1000	3/8-16	1/2	1	2	11/16
IL7-6Bx2-HX-P	IL7-6BSx2-HX-P	1000	3/8-16	1/2	1	2	11/16
IL7-6Bx3-P	IL7-6BSx3-P	1000	3/8-16	1/2	1	3	11/16
IL7-6Bx3-HX-P	IL7-6BSx3-HX-P	1000	3/8-16	1/2	1	3	11/16
IL7-6Bx4-P	IL7-6BSx4-P	1000	3/8-16	1/2	1	4	11/16
IL7-6Bx45-HX-P	IL7-6BSx45-HX-P	1000	3/8-16	1/2	1	4-1/2	11/16
IL7-6Bx6-HX-P	IL7-6BSx6-HX-P	1000	3/8-16	1/2	1	6	11/16
IL7-6FBx1-P	IL7-6FBSx1-P	1000	3/8-24	1/2	1	1	11/16
IL7-6FBx2-P	IL7-6FBSx2-P	1000	3/8-24	1/2	1	2	11/16
IL7-7B-P	IL7-7BS-P	2000	1/2-13	1/2	1	1-9/16	11/16
IL7-7Bx2-P	IL7-7BSx2-P	2000	1/2-13	1/2	1	2	11/16
IL7-7Bx2-HX-P	IL7-7BSx2-HX-P	2000	1/2-13	1/2	1	2	11/16
IL7-7Bx25-HX-P	IL7-7BSx25-HX-P	2000	1/2-13	1/2	1	2-1/2	11/16
IL7-7Bx3-P	IL7-7BSx3-P	2000	1/2-13	1/2	1	3	11/16
IL7-7Bx3-HX-P	IL7-7BSx3-HX-P	2000	1/2-13	1/2	1	3	11/16
IL7-7Bx35-HX-P	IL7-7BSx35-HX-P	2000	1/2-13	1/2	1	3-1/2	11/16
IL7-7Bx4-P	IL7-7BSx4-P	2000	1/2-13	1/2	1	4	11/16
IL7-7Bx4-HX-P	IL7-7BSx4-HX-P	2000	1/2-13	1/2	1	4	11/16
IL7-7Bx5-P	IL7-7BSx5-P	2000	1/2-13	1/2	1	5	11/16
IL7-7Bx5-HX-P	IL7-7BSx5-HX-P	2000	1/2-13	1/2	1	5	11/16
IL7-7Bx6-HX-P	IL7-7BSx6-HX-P	1500	1/2-13	1/2	1	6	11/16
IL7-7Bx8-HX-P	IL7-7BSx8-HX-P	1000	1/2-13	1/2	1	8	11/16
IL7-7FBx1-P	IL7-7FBSx1-P	2000	1/2-20	1/2	1	1	11/16
IL7-7FBx2-P	IL7-7FBSx2-P	2000	1/2-20	1/2	1	2	11/16
IL7-7FBx4-P	IL7-7FBSx4-P	2000	1/2-20	1/2	1	4	11/16
IL7-8B-P	IL7-8BS-P	2500	5/8-11	5/8	1	1-9/16	11/16
IL7-8Bx3-P	IL7-8BSx3-P	2500	5/8-11	5/8	1	3	11/16
IL7-8Bx4-P	IL7-8BSx4-P	2500	5/8-11	5/8	1	4	11/16
IL7-8Bx5-P	IL7-8BSx5-P	2500	5/8-11	5/8	1	5	11/16
IL7-9B-P	IL7-9BS-P	3000	3/4-10	3/4	1	1-9/16	11/16
IL7-9Bx3-P	IL7-9BSx3-P	3000	3/4-10	3/4	1	3	11/16
IL7-9Bx4-P	IL7-9BSx4-P	3000	3/4-10	3/4	1	4	11/16
IL8-4Bx1/2-P	IL8-4BSx1/2-P	100	1/4-20	1/2	1-1/2	1/2	11/16
IL8-4Bx1-P	IL8-4BSx1-P	100	1/4-20	1/2	1-1/2	1	11/16
IL8-4B-P	IL8-4BS-P	100	1/4-20	1/2	1-1/2	1-9/16	11/16
IL8-4Bx2-HX-P	IL8-4BSx2-HX-P	100	1/4-20	1/2	1-1/2	2	11/16
IL8-4Bx25-P	IL8-4BSx25-P	100	1/4-20	1/2	1-1/2	2-1/2	11/16
IL8-5Bx3/4-P	IL8-5BSx3/4-P	100	1/4-20	1/2	1-1/2	3/4	11/16
IL8-5Bx15-HX-P	IL8-5BSx15-HX-P	500	5/16-18	1/2	1-1/2	1-1/2	11/16
IL8-5B-P	IL8-5BS-P	500	5/16-18	1/2	1-1/2	1-9/16	11/16
IL8-5Bx25-HX-P	IL8-5BSx25-HX-P	500	5/16-18	1/2	1-1/2	2-1/2	11/16
IL8-5Bx3-P	IL8-5BSx3-P	500	5/16-18	1/2	1-1/2	3	11/16
IL8-5Bx4-P	IL8-5BSx4-P	500	5/16-18	1/2	1-1/2	4	11/16
IL8-6Bx3/4-P	IL8-6BSx3/4-P	1000	3/8-16	1/2	1-1/2	3/4	11/16
IL8-6Bx15-HX-P	IL8-6BSx15-HX-P	1000	3/8-16	1/2	1-1/2	1-1/2	11/16
IL8-6B-P	IL8-6BS-P	1000	3/8-16	1/2	1-1/2	1-9/16	11/16
IL8-6Bx1-P	IL8-6BSx1-P	1000	3/8-16	1/2	1-1/2	1	11/16
IL8-6Bx2-P	IL8-6BSx2-P	1000	3/8-16	1/2	1-1/2	2	11/16
IL8-6Bx2-HX-P	IL8-6BSx2-HX-P	1000	3/8-16	1/2	1-1/2	2	11/16
IL8-6Bx3-P	IL8-6BSx3-P	1000	3/8-16	1/2	1-1/2	3	11/16
IL8-6Bx3-HX-P	IL8-6BSx3-HX-P	1000	3/8-16	1/2	1-1/2	3	11/16
IL8-6Bx4-P	IL8-6BSx4-P	1000	3/8-16	1/2	1-1/2	4	11/16
IL8-6Bx45-HX-P	IL8-6BSx45-HX-P	1000	3/8-16	1/2	1-1/2	4-1/2	11/16
IL8-6Bx6-HX-P	IL8-6BSx6-HX-P	1000	3/8-16	1/2	1-1/2	6	11/16
IL8-6FBx1-P	IL8-6FBSx1-P	1000	3/8-24	1/2	1-1/2	1	11/16
IL8-6FBx2-P	IL8-6FBSx2-P	1000	3/8-24	1/2	1-1/2	2	11/16
IL8-7B-P	IL8-7BS-P	2000	1/2-13	1/2	1-1/2	1-9/16	11/16
IL8-7Bx2-P	IL8-7BSx2-P	2000	1/2-13	1/2	1-1/2	2	11/16
IL8-7Bx2-HX-P	IL8-7BSx2-HX-P	2000	1/2-13	1/2	1-1/2	2	11/16
IL8-7Bx25-HX-P	IL8-7BSx25-HX-P	2000	1/2-13	1/2	1-1/2	2-1/2	11/16
IL8-7Bx3-P	IL8-7BSx3-P	2000	1/2-13	1/2	1-1/2	3	11/16
IL8-7Bx3-HX-P	IL8-7BSx3-HX-P	2000	1/2-13	1/2	1-1/2	3	11/16
IL8-7Bx35-HX-P	IL8-7BSx35-HX-P	2000	1/2-13	1/2	1-1/2	3-1/2	11/16
IL8-7Bx4-P	IL8-7BSx4-P	2000	1/2-13	1/2	1-1/2	4	11/16
IL8-7Bx4-HX-P	IL8-7BSx4-HX-P	2000	1/2-13	1/2	1-1/2	4	11/16
IL8-7Bx5-P	IL8-7BSx5-P	2000	1/2-13	1/2	1-1/2	5	11/16
IL8-7Bx5-HX-P	IL8-7BSx5-HX-P	2000	1/2-13	1/2	1-1/2	5	11/16
IL8-7Bx6-HX-P	IL8-7BSx6-HX-P	1500	1/2-13	1/2	1-1/2	6	11/16
IL8-7Bx8-HX-P	IL8-7BSx8-HX-P	1000	1/2-13	1/2	1-1/2	8	11/16



POLY BASE FIXED STUD GLIDES


The IEC *Poly Base Steel and Stainless Steel Fixed Stud Glide* is ideal for medium-duty load requirements. The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

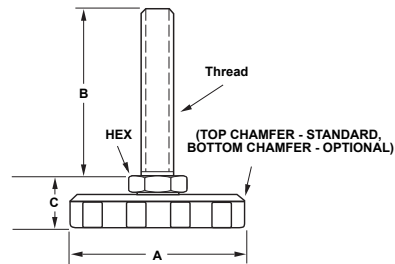

Optional bottom chamfer (reverse assembly) – with 90° top edge

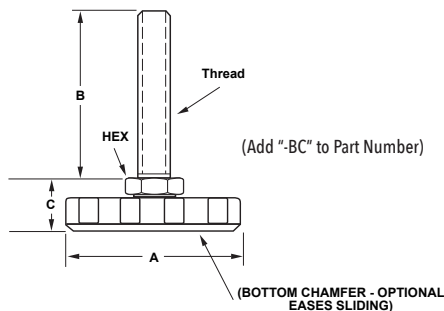

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL8-7FBx1	IL8-7FBSx1	2000	1/2-20	1/2	1-1/2	1	11/16
IL8-7FBx2	IL8-7FBSx2	2000	1/2-20	1/2	1-1/2	2	11/16
IL8-7FBx4	IL8-7FBSx4	2000	1/2-20	1/2	1-1/2	4	11/16
IL8-8B	IL8-8BS	2500	5/8-11	5/8	1-1/2	1-9/16	11/16
IL8-8Bx3	IL8-8BSx3	2500	5/8-11	5/8	1-1/2	3	11/16
IL8-8Bx4	IL8-8BSx4	2500	5/8-11	5/8	1-1/2	4	11/16
IL8-8Bx5	IL8-8BSx5	2500	5/8-11	5/8	1-1/2	5	11/16
IL8-9B	IL8-9BS	3000	3/4-10	3/4	1-1/2	1-9/16	11/16
IL8-9Bx3	IL8-9BSx3	3000	3/4-10	3/4	1-1/2	3	11/16
IL8-9Bx4	IL8-9BSx4	3000	3/4-10	3/4	1-1/2	4	11/16
IL7A-4Bx1/2	IL7A-4BSx1/2	100	1/4-20	1/2	2	1/2	11/16
IL7A-4Bx1	IL7A-4BSx1	100	1/4-20	1/2	2	1	11/16
IL7A-4B	IL7A-4BS	100	1/4-20	1/2	2	1-9/16	11/16
IL7A-4Bx2-HX	IL7A-4BSx2-HX	100	1/4-20	1/2	2	2	11/16
IL7A-4Bx25	IL7A-4BSx25	100	1/4-20	1/2	2	2-1/2	11/16
IL7A-5Bx3/4	IL7A-5BSx3/4	500	5/16-18	1/2	2	3/4	11/16
IL7A-5Bx15-HX	IL7A-5BSx15-HX	500	5/16-18	1/2	2	1-1/2	11/16
IL7A-5B	IL7A-5BS	500	5/16-18	1/2	2	1-9/16	11/16
IL7A-5Bx25-HX	IL7A-5BSx25-HX	500	5/16-18	1/2	2	2-1/2	11/16
IL7A-5Bx3	IL7A-5BSx3	500	5/16-18	1/2	2	3	11/16
IL7A-5Bx4	IL7A-5BSx4	500	5/16-18	1/2	2	4	11/16
IL7A-6Bx3/4	IL7A-6BSx3/4	1000	3/8-16	1/2	2	3/4	11/16
IL7A-6Bx15-HX	IL7A-6BSx15-HX	1000	3/8-16	1/2	2	1-1/2	11/16
IL7A-6B	IL7A-6BS	1000	3/8-16	1/2	2	1-9/16	11/16
IL7A-6Bx1	IL7A-6BSx1	1000	3/8-16	1/2	2	1	11/16
IL7A-6Bx2	IL7A-6BSx2	1000	3/8-16	1/2	2	2	11/16
IL7A-6Bx2-HX	IL7A-6BSx2-HX	1000	3/8-16	1/2	2	2	11/16
IL7A-6Bx3	IL7A-6BSx3	1000	3/8-16	1/2	2	3	11/16
IL7A-6Bx3-HX	IL7A-6BSx3-HX	1000	3/8-16	1/2	2	3	11/16
IL7A-6Bx4	IL7A-6BSx4	1000	3/8-16	1/2	2	4	11/16
IL7A-6Bx45-HX	IL7A-6BSx45-HX	1000	3/8-16	1/2	2	4-1/2	11/16
IL7A-6Bx6-HX	IL7A-6BSx6-HX	1000	3/8-16	1/2	2	6	11/16
IL7A-6FBx1	IL7A-6FBSx1	1000	3/8-24	1/2	2	1	11/16
IL7A-6FBx2	IL7A-6FBSx2	1000	3/8-24	1/2	2	2	11/16
IL7A-7B	IL7A-7BS	2000	1/2-13	1/2	2	1-9/16	11/16
IL7A-7Bx2	IL7A-7BSx2	2000	1/2-13	1/2	2	2	11/16
IL7A-7Bx2-HX	IL7A-7BSx2-HX	2000	1/2-13	1/2	2	2	11/16
IL7A-7Bx25-HX	IL7A-7BSx25-HX	2000	1/2-13	1/2	2	2-1/2	11/16
IL7A-7Bx3	IL7A-7BSx3	2000	1/2-13	1/2	2	3	11/16
IL7A-7Bx3-HX	IL7A-7BSx3-HX	2000	1/2-13	1/2	2	3	11/16
IL7A-7Bx35-HX	IL7A-7BSx35-HX	2000	1/2-13	1/2	2	3-1/2	11/16
IL7A-7Bx4	IL7A-7BSx4	2000	1/2-13	1/2	2	4	11/16
IL7A-7Bx4-HX	IL7A-7BSx4-HX	2000	1/2-13	1/2	2	4	11/16
IL7A-7Bx5	IL7A-7BSx5	2000	1/2-13	1/2	2	5	11/16
IL7A-7Bx5-HX	IL7A-7BSx5-HX	2000	1/2-13	1/2	2	5	11/16
IL7A-7Bx6-HX	IL7A-7BSx6-HX	1500	1/2-13	1/2	2	6	11/16
IL7A-7Bx8-HX	IL7A-7BSx8-HX	1000	1/2-13	1/2	2	8	11/16
IL7A-7FBx1	IL7A-7FBSx1	2000	1/2-20	1/2	2	1	11/16
IL7A-7FBx2	IL7A-7FBSx2	2000	1/2-20	1/2	2	2	11/16
IL7A-7FBx4	IL7A-7FBSx4	2000	1/2-20	1/2	2	4	11/16
IL7A-8B	IL7A-8BS	2500	5/8-11	5/8	2	1-9/16	11/16
IL7A-8Bx3	IL7A-8BSx3	2500	5/8-11	5/8	2	3	11/16
IL7A-8Bx4	IL7A-8BSx4	2500	5/8-11	5/8	2	4	11/16
IL7A-8Bx5	IL7A-8BSx5	2500	5/8-11	5/8	2	5	11/16
IL7A-9B	IL7A-9BS	3000	3/4-10	3/4	2	1-9/16	11/16
IL7A-9Bx3	IL7A-9BSx3	3000	3/4-10	3/4	2	3	11/16
IL7A-9Bx4	IL7A-9BSx4	3000	3/4-10	3/4	2	4	11/16
IL7M-4Bx1/2	IL7M-4BSx1/2	100	1/4-20	1/2	2-1/2	1/2	11/16
IL7M-4Bx1	IL7M-4BSx1	100	1/4-20	1/2	2-1/2	1	11/16
IL7M-4B	IL7M-4BS	100	1/4-20	1/2	2-1/2	1-9/16	11/16
IL7M-4Bx2-HX	IL7M-4BSx2-HX	100	1/4-20	1/2	2-1/2	2	11/16
IL7M-4Bx25	IL7M-4BSx25	100	1/4-20	1/2	2-1/2	2-1/2	11/16
IL7M-5Bx3/4	IL7M-5BSx3/4	500	5/16-18	1/2	2-1/2	3/4	11/16
IL7M-5Bx15-HX	IL7M-5BSx15-HX	500	5/16-18	1/2	2-1/2	1-1/2	11/16
IL7M-5B	IL7M-5BS	500	5/16-18	1/2	2-1/2	1-9/16	11/16
IL7M-5Bx25-HX	IL7M-5BSx25-HX	500	5/16-18	1/2	2-1/2	2-1/2	11/16
IL7M-5Bx3	IL7M-5BSx3	500	5/16-18	1/2	2-1/2	3	11/16
IL7M-5Bx4	IL7M-5BSx4	500	5/16-18	1/2	2-1/2	4	11/16
IL7M-6Bx3/4	IL7M-6BSx3/4	1000	3/8-16	1/2	2-1/2	3/4	11/16
IL7M-6Bx15-HX	IL7M-6BSx15-HX	1000	3/8-16	1/2	2-1/2	1-1/2	11/16
IL7M-6B	IL7M-6BS	1000	3/8-16	1/2	2-1/2	1-9/16	11/16
IL7M-6Bx1	IL7M-6BSx1	1000	3/8-16	1/2	2-1/2	1	11/16
IL7M-6Bx2	IL7M-6BSx2	1000	3/8-16	1/2	2-1/2	2	11/16
IL7M-6Bx2-HX	IL7M-6BSx2-HX	1000	3/8-16	1/2	2-1/2	2	11/16
IL7M-6Bx3	IL7M-6BSx3	1000	3/8-16	1/2	2-1/2	3	11/16
IL7M-6Bx3-HX	IL7M-6BSx3-HX	1000	3/8-16	1/2	2-1/2	3	11/16
IL7M-6Bx4	IL7M-6BSx4	1000	3/8-16	1/2	2-1/2	4	11/16
IL7M-6Bx45-HX	IL7M-6BSx45-HX	1000	3/8-16	1/2	2-1/2	4-1/2	11/16
IL7M-6Bx6-HX	IL7M-6BSx6-HX	1000	3/8-16	1/2	2-1/2	6	11/16
IL7M-6FBx1	IL7M-6FBSx1	1000	3/8-24	1/2	2-1/2	1	11/16
IL7M-6FBx2	IL7M-6FBSx2	1000	3/8-24	1/2	2-1/2	2	11/16



POLY BASE FIXED STUD GLIDES WITH RUBBER PAD


The IEC Poly Base Steel and Stainless Steel Fixed Stud Glide with Rubber Pad is ideal for medium-duty load requirements. The rubber pad provides a non-skid, surface protecting feature, while the stud tilts several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

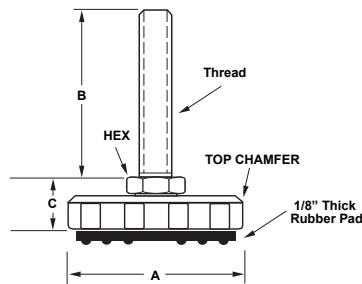

Rubber Pad Bottom View

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL8-7FBx1-P	IL8-7FBSx1-P	2000	1/2-20	1/2	1-1/2	1	11/16
IL8-7FBx2-P	IL8-7FBSx2-P	2000	1/2-20	1/2	1-1/2	2	11/16
IL8-7FBx4-P	IL8-7FBSx4-P	2000	1/2-20	1/2	1-1/2	4	11/16
IL8-8B-P	IL8-8BS-P	2500	5/8-11	5/8	1-1/2	1-9/16	11/16
IL8-8Bx3-P	IL8-8BSx3-P	2500	5/8-11	5/8	1-1/2	3	11/16
IL8-8Bx4-P	IL8-8BSx4-P	2500	5/8-11	5/8	1-1/2	4	11/16
IL8-8Bx5-P	IL8-8BSx5-P	2500	5/8-11	5/8	1-1/2	5	11/16
IL8-9B-P	IL8-9BS-P	3000	3/4-10	3/4	1-1/2	1-9/16	11/16
IL8-9Bx3-P	IL8-9BSx3-P	3000	3/4-10	3/4	1-1/2	3	11/16
IL8-9Bx4-P	IL8-9BSx4-P	3000	3/4-10	3/4	1-1/2	4	11/16
IL7A-4Bx1/2-P	IL7A-4BSx1/2-P	100	1/4-20	1/2	2	1/2	11/16
IL7A-4Bx1-P	IL7A-4BSx1-P	100	1/4-20	1/2	2	1	11/16
IL7A-4B-P	IL7A-4BS-P	100	1/4-20	1/2	2	1-9/16	11/16
IL7A-4Bx2-HX-P	IL7A-4BSx2-HX-P	100	1/4-20	1/2	2	2	11/16
IL7A-4Bx25-P	IL7A-4BSx25-P	100	1/4-20	1/2	2	2-1/2	11/16
IL7A-5Bx3/4-P	IL7A-5BSx3/4-P	500	5/16-18	1/2	2	3/4	11/16
IL7A-5Bx15-HX-P	IL7A-5BSx15-HX-P	500	5/16-18	1/2	2	1-1/2	11/16
IL7A-5B-P	IL7A-5BS-P	500	5/16-18	1/2	2	1-9/16	11/16
IL7A-5Bx25-HX-P	IL7A-5BSx25-HX-P	500	5/16-18	1/2	2	2-1/2	11/16
IL7A-5Bx3-P	IL7A-5BSx3-P	500	5/16-18	1/2	2	3	11/16
IL7A-5Bx4-P	IL7A-5BSx4-P	500	5/16-18	1/2	2	4	11/16
IL7A-6Bx3/4-P	IL7A-6BSx3/4-P	1000	3/8-16	1/2	2	3/4	11/16
IL7A-6Bx15-HX-P	IL7A-6BSx15-HX-P	1000	3/8-16	1/2	2	1-1/2	11/16
IL7A-6B-P	IL7A-6BS-P	1000	3/8-16	1/2	2	1-9/16	11/16
IL7A-6Bx1-P	IL7A-6BSx1-P	1000	3/8-16	1/2	2	1	11/16
IL7A-6Bx2-P	IL7A-6BSx2-P	1000	3/8-16	1/2	2	2	11/16
IL7A-6Bx2-HX-P	IL7A-6BSx2-HX-P	1000	3/8-16	1/2	2	2	11/16
IL7A-6Bx3-P	IL7A-6BSx3-P	1000	3/8-16	1/2	2	3	11/16
IL7A-6Bx3-HX-P	IL7A-6BSx3-HX-P	1000	3/8-16	1/2	2	3	11/16
IL7A-6Bx4-P	IL7A-6BSx4-P	1000	3/8-16	1/2	2	4	11/16
IL7A-6Bx45-HX-P	IL7A-6BSx45-HX-P	1000	3/8-16	1/2	2	4-1/2	11/16
IL7A-6Bx6-HX-P	IL7A-6BSx6-HX-P	1000	3/8-16	1/2	2	6	11/16
IL7A-6FBx1-P	IL7A-6FBSx1-P	1000	3/8-24	1/2	2	1	11/16
IL7A-6FBx2-P	IL7A-6FBSx2-P	1000	3/8-24	1/2	2	2	11/16
IL7A-7B-P	IL7A-7BS-P	2000	1/2-13	1/2	2	1-9/16	11/16
IL7A-7Bx2-P	IL7A-7BSx2-P	2000	1/2-13	1/2	2	2	11/16
IL7A-7Bx2-HX-P	IL7A-7BSx2-HX-P	2000	1/2-13	1/2	2	2	11/16
IL7A-7Bx25-HX-P	IL7A-7BSx25-HX-P	2000	1/2-13	1/2	2	2-1/2	11/16
IL7A-7Bx3-P	IL7A-7BSx3-P	2000	1/2-13	1/2	2	3	11/16
IL7A-7Bx3-HX-P	IL7A-7BSx3-HX-P	2000	1/2-13	1/2	2	3	11/16
IL7A-7Bx35-HX-P	IL7A-7BSx35-HX-P	2000	1/2-13	1/2	2	3-1/2	11/16
IL7A-7Bx4-P	IL7A-7BSx4-P	2000	1/2-13	1/2	2	4	11/16
IL7A-7Bx4-HX-P	IL7A-7BSx4-HX-P	2000	1/2-13	1/2	2	4	11/16
IL7A-7Bx5-P	IL7A-7BSx5-P	2000	1/2-13	1/2	2	5	11/16
IL7A-7Bx5-HX-P	IL7A-7BSx5-HX-P	2000	1/2-13	1/2	2	5	11/16
IL7A-7Bx6-HX-P	IL7A-7BSx6-HX-P	1500	1/2-13	1/2	2	6	11/16
IL7A-7Bx8-HX-P	IL7A-7BSx8-HX-P	1000	1/2-13	1/2	2	8	11/16
IL7A-7FBx1-P	IL7A-7FBSx1-P	2000	1/2-20	1/2	2	1	11/16
IL7A-7FBx2-P	IL7A-7FBSx2-P	2000	1/2-20	1/2	2	2	11/16
IL7A-7FBx4-P	IL7A-7FBSx4-P	2000	1/2-20	1/2	2	4	11/16
IL7A-8B-P	IL7A-8BS-P	2500	5/8-11	5/8	2	1-9/16	11/16
IL7A-8Bx3-P	IL7A-8BSx3-P	2500	5/8-11	5/8	2	3	11/16
IL7A-8Bx4-P	IL7A-8BSx4-P	2500	5/8-11	5/8	2	4	11/16
IL7A-8Bx5-P	IL7A-8BSx5-P	2500	5/8-11	5/8	2	5	11/16
IL7A-9B-P	IL7A-9BS-P	3000	3/4-10	3/4	2	1-9/16	11/16
IL7A-9Bx3-P	IL7A-9BSx3-P	3000	3/4-10	3/4	2	3	11/16
IL7A-9Bx4-P	IL7A-9BSx4-P	3000	3/4-10	3/4	2	4	11/16
IL7M-4Bx1/2-P	IL7M-4BSx1/2-P	100	1/4-20	1/2	2-1/2	1/2	11/16
IL7M-4Bx1-P	IL7M-4BSx1-P	100	1/4-20	1/2	2-1/2	1	11/16
IL7M-4B-P	IL7M-4BS-P	100	1/4-20	1/2	2-1/2	1-9/16	11/16
IL7M-4Bx2-HX-P	IL7M-4BSx2-HX-P	100	1/4-20	1/2	2-1/2	2	11/16
IL7M-4Bx25-P	IL7M-4BSx25-P	100	1/4-20	1/2	2-1/2	2-1/2	11/16
IL7M-5Bx3/4-P	IL7M-5BSx3/4-P	500	5/16-18	1/2	2-1/2	3/4	11/16
IL7M-5Bx15-HX-P	IL7M-5BSx15-HX-P	500	5/16-18	1/2	2-1/2	1-1/2	11/16
IL7M-5B-P	IL7M-5BS-P	500	5/16-18	1/2	2-1/2	1-9/16	11/16
IL7M-5Bx25-HX-P	IL7M-5BSx25-HX-P	500	5/16-18	1/2	2-1/2	2-1/2	11/16
IL7M-5Bx3-P	IL7M-5BSx3-P	500	5/16-18	1/2	2-1/2	3	11/16
IL7M-5Bx4-P	IL7M-5BSx4-P	500	5/16-18	1/2	2-1/2	4	11/16
IL7M-6Bx3/4-P	IL7M-6BSx3/4-P	1000	3/8-16	1/2	2-1/2	3/4	11/16
IL7M-6Bx15-HX-P	IL7M-6BSx15-HX-P	1000	3/8-16	1/2	2-1/2	1-1/2	11/16
IL7M-6B-P	IL7M-6BS-P	1000	3/8-16	1/2	2-1/2	1-9/16	11/16
IL7M-6Bx1-P	IL7M-6BSx1-P	1000	3/8-16	1/2	2-1/2	1	11/16
IL7M-6Bx2-P	IL7M-6BSx2-P	1000	3/8-16	1/2	2-1/2	2	11/16
IL7M-6Bx2-HX-P	IL7M-6BSx2-HX-P	1000	3/8-16	1/2	2-1/2	2	11/16
IL7M-6Bx3-P	IL7M-6BSx3-P	1000	3/8-16	1/2	2-1/2	3	11/16
IL7M-6Bx3-HX-P	IL7M-6BSx3-HX-P	1000	3/8-16	1/2	2-1/2	3	11/16
IL7M-6Bx4-P	IL7M-6BSx4-P	1000	3/8-16	1/2	2-1/2	4	11/16
IL7M-6Bx45-HX-P	IL7M-6BSx45-HX-P	1000	3/8-16	1/2	2-1/2	4-1/2	11/16
IL7M-6Bx6-HX-P	IL7M-6BSx6-HX-P	1000	3/8-16	1/2	2-1/2	6	11/16
IL7M-6FBx1-P	IL7M-6FBSx1-P	1000	3/8-24	1/2	2-1/2	1	11/16
IL7M-6FBx2-P	IL7M-6FBSx2-P	1000	3/8-24	1/2	2-1/2	2	11/16



POLY BASE FIXED STUD GLIDES


The IEC *Poly Base Steel and Stainless Steel Fixed Stud Glide* is ideal for medium-duty load requirements. The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

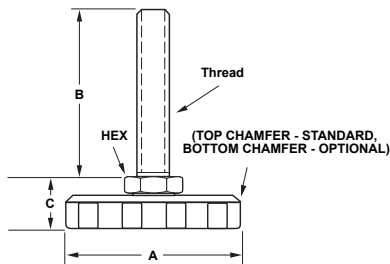

Optional bottom chamfer (reverse assembly) – with 90° top edge

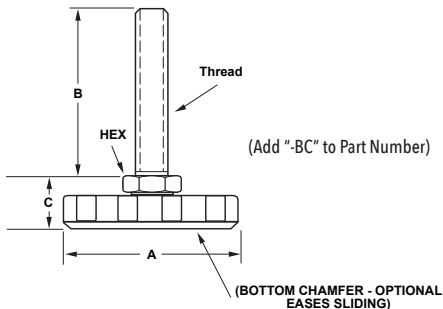

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7M-7B	IL7M-7BS	2000	1/2-13	1/2	2-1/2	1-9/16	11/16
IL7M-7Bx2	IL7M-7BSx2	2000	1/2-13	1/2	2-1/2	2	11/16
IL7M-7Bx2-HX	IL7M-7BSx2-HX	2000	1/2-13	1/2	2-1/2	2	11/16
IL7M-7Bx25-HX	IL7M-7BSx25-HX	2000	1/2-13	1/2	2-1/2	2-1/2	11/16
IL7M-7Bx3	IL7M-7BSx3	2000	1/2-13	1/2	2-1/2	3	11/16
IL7M-7Bx3-HX	IL7M-7BSx3-HX	2000	1/2-13	1/2	2-1/2	3	11/16
IL7M-7Bx35-HX	IL7M-7BSx35-HX	2000	1/2-13	1/2	2-1/2	3-1/2	11/16
IL7M-7Bx4	IL7M-7BSx4	2000	1/2-13	1/2	2-1/2	4	11/16
IL7M-7Bx4-HX	IL7M-7BSx4-HX	2000	1/2-13	1/2	2-1/2	4	11/16
IL7M-7Bx5	IL7M-7BSx5	2000	1/2-13	1/2	2-1/2	5	11/16
IL7M-7Bx5-HX	IL7M-7BSx5-HX	2000	1/2-13	1/2	2-1/2	5	11/16
IL7M-7Bx6-HX	IL7M-7BSx6-HX	1500	1/2-13	1/2	2-1/2	6	11/16
IL7M-7Bx8-HX	IL7M-7BSx8-HX	1000	1/2-13	1/2	2-1/2	8	11/16
IL7M-7FBx1	IL7M-7FBSx1	2000	1/2-20	1/2	2-1/2	1	11/16
IL7M-7FBx2	IL7M-7FBSx2	2000	1/2-20	1/2	2-1/2	2	11/16
IL7M-7FBx4	IL7M-7FBSx4	2000	1/2-20	1/2	2-1/2	4	11/16
IL7M-8B	IL7M-8BS	2500	5/8-11	5/8	2-1/2	1-9/16	11/16
IL7M-8Bx3	IL7M-8BSx3	2500	5/8-11	5/8	2-1/2	3	11/16
IL7M-8Bx4	IL7M-8BSx4	2500	5/8-11	5/8	2-1/2	4	11/16
IL7M-8Bx5	IL7M-8BSx5	2500	5/8-11	5/8	2-1/2	5	11/16
IL7M-9B	IL7M-9BS	3000	3/4-10	3/4	2-1/2	1-9/16	11/16
IL7M-9Bx3	IL7M-9BSx3	3000	3/4-10	3/4	2-1/2	3	11/16
IL7M-9Bx4	IL7M-9BSx4	3000	3/4-10	3/4	2-1/2	4	11/16
IL8A-4Bx1/2	IL8A-4BSx1/2	100	1/4-20	1/2	3	1/2	11/16
IL8A-4Bx1	IL8A-4BSx1	100	1/4-20	1/2	3	1	11/16
IL8A-4B	IL8A-4BS	100	1/4-20	1/2	3	1-9/16	11/16
IL8A-4Bx2-HX	IL8A-4BSx2-HX	100	1/4-20	1/2	3	2	11/16
IL8A-4Bx25	IL8A-4BSx25	100	1/4-20	1/2	3	2-1/2	11/16
IL8A-5Bx3/4	IL8A-5BSx3/4	500	5/16-18	1/2	3	3/4	11/16
IL8A-5Bx15-HX	IL8A-5BSx15-HX	500	5/16-18	1/2	3	1-1/2	11/16
IL8A-5B	IL8A-5BS	500	5/16-18	1/2	3	1-9/16	11/16
IL8A-5Bx25-HX	IL8A-5BSx25-HX	500	5/16-18	1/2	3	2-1/2	11/16
IL8A-5Bx3	IL8A-5BSx3	500	5/16-18	1/2	3	3	11/16
IL8A-5Bx4	IL8A-5BSx4	500	5/16-18	1/2	3	4	11/16
IL8A-6Bx3/4	IL8A-6BSx3/4	1000	3/8-16	1/2	3	3/4	11/16
IL8A-6Bx15-HX	IL8A-6BSx15-HX	1000	3/8-16	1/2	3	1-1/2	11/16
IL8A-6B	IL8A-6BS	1000	3/8-16	1/2	3	1-9/16	11/16
IL8A-6Bx1	IL8A-6BSx1	1000	3/8-16	1/2	3	1	11/16
IL8A-6Bx2	IL8A-6BSx2	1000	3/8-16	1/2	3	2	11/16
IL8A-6Bx2-HX	IL8A-6BSx2-HX	1000	3/8-16	1/2	3	2	11/16
IL8A-6Bx3	IL8A-6BSx3	1000	3/8-16	1/2	3	3	11/16
IL8A-6Bx3-HX	IL8A-6BSx3-HX	1000	3/8-16	1/2	3	3	11/16
IL8A-6Bx4	IL8A-6BSx4	1000	3/8-16	1/2	3	4	11/16
IL8A-6Bx45-HX	IL8A-6BSx45-HX	1000	3/8-16	1/2	3	4-1/2	11/16
IL8A-6Bx6-HX	IL8A-6BSx6-HX	1000	3/8-16	1/2	3	6	11/16
IL8A-6FBx1	IL8A-6FBSx1	1000	3/8-24	1/2	3	1	11/16
IL8A-6FBx2	IL8A-6FBSx2	1000	3/8-24	1/2	3	2	11/16
IL8A-7B	IL8A-7BS	2000	1/2-13	1/2	3	1-9/16	11/16
IL8A-7Bx2	IL8A-7BSx2	2000	1/2-13	1/2	3	2	11/16
IL8A-7Bx2-HX	IL8A-7BSx2-HX	2000	1/2-13	1/2	3	2	11/16
IL8A-7Bx25-HX	IL8A-7BSx25-HX	2000	1/2-13	1/2	3	2-1/2	11/16
IL8A-7Bx3	IL8A-7BSx3	2000	1/2-13	1/2	3	3	11/16
IL8A-7Bx3-HX	IL8A-7BSx3-HX	2000	1/2-13	1/2	3	3	11/16
IL8A-7Bx35-HX	IL8A-7BSx35-HX	2000	1/2-13	1/2	3	3-1/2	11/16
IL8A-7Bx4	IL8A-7BSx4	2000	1/2-13	1/2	3	4	11/16
IL8A-7Bx4-HX	IL8A-7BSx4-HX	2000	1/2-13	1/2	3	4	11/16
IL8A-7Bx5	IL8A-7BSx5	2000	1/2-13	1/2	3	5	11/16
IL8A-7Bx5-HX	IL8A-7BSx5-HX	2000	1/2-13	1/2	3	5	11/16
IL8A-7Bx6-HX	IL8A-7BSx6-HX	1500	1/2-13	1/2	3	6	11/16
IL8A-7Bx8-HX	IL8A-7BSx8-HX	1000	1/2-13	1/2	3	8	11/16
IL8A-7FBx1	IL8A-7FBSx1	2000	1/2-20	1/2	3	1	11/16
IL8A-7FBx2	IL8A-7FBSx2	2000	1/2-20	1/2	3	2	11/16
IL8A-7FBx4	IL8A-7FBSx4	2000	1/2-20	1/2	3	4	11/16
IL8A-8B	IL8A-8BS	2500	5/8-11	5/8	3	1-9/16	11/16
IL8A-8Bx3	IL8A-8BSx3	2500	5/8-11	5/8	3	3	11/16
IL8A-8Bx4	IL8A-8BSx4	2500	5/8-11	5/8	3	4	11/16
IL8A-8Bx5	IL8A-8BSx5	2500	5/8-11	5/8	3	5	11/16
IL8A-9B	IL8A-9BS	3000	3/4-10	3/4	3	1-9/16	11/16
IL8A-9Bx3	IL8A-9BSx3	3000	3/4-10	3/4	3	3	11/16
IL8A-9Bx4	IL8A-9BSx4	3000	3/4-10	3/4	3	4	11/16



POLY BASE FIXED STUD GLIDES WITH RUBBER PAD


The IEC *Poly Base Steel and Stainless Steel Fixed Stud Glide with Rubber Pad* is ideal for medium-duty load requirements. The rubber pad provides a non-skid, surface protecting feature, while the stud tilts several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 3/8" thick. Four base sizes to choose from (1" to 3"). Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

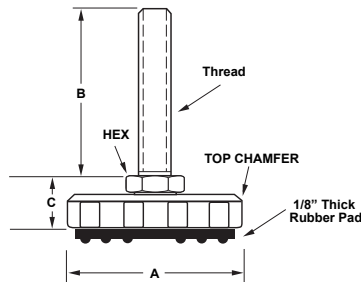

Rubber Pad Bottom View

Steel	SS	Load	Thread	Hex	A	B	C
Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7M-7B-P	IL7M-7BS-P	2000	1/2-13	1/2	2-1/2	1-9/16	11/16
IL7M-7Bx2-P	IL7M-7BSx2-P	2000	1/2-13	1/2	2-1/2	2	11/16
IL7M-7Bx2-HX-P	IL7M-7BSx2-HX-P	2000	1/2-13	1/2	2-1/2	2	11/16
IL7M-7Bx25-HX-P	IL7M-7BSx25-HX-P	2000	1/2-13	1/2	2-1/2	2-1/2	11/16
IL7M-7Bx3-P	IL7M-7BSx3-P	2000	1/2-13	1/2	2-1/2	3	11/16
IL7M-7Bx3-HX-P	IL7M-7BSx3-HX-P	2000	1/2-13	1/2	2-1/2	3	11/16
IL7M-7Bx35-HX-P	IL7M-7BSx35-HX-P	2000	1/2-13	1/2	2-1/2	3-1/2	11/16
IL7M-7Bx4-P	IL7M-7BSx4-P	2000	1/2-13	1/2	2-1/2	4	11/16
IL7M-7Bx4-HX-P	IL7M-7BSx4-HX-P	2000	1/2-13	1/2	2-1/2	4	11/16
IL7M-7Bx5-P	IL7M-7BSx5-P	2000	1/2-13	1/2	2-1/2	5	11/16
IL7M-7Bx5-HX-P	IL7M-7BSx5-HX-P	2000	1/2-13	1/2	2-1/2	5	11/16
IL7M-7Bx6-HX-P	IL7M-7BSx6-HX-P	1500	1/2-13	1/2	2-1/2	6	11/16
IL7M-7Bx8-HX-P	IL7M-7BSx8-HX-P	1000	1/2-13	1/2	2-1/2	8	11/16
IL7M-7FBx1-P	IL7M-7FBSx1-P	2000	1/2-20	1/2	2-1/2	1	11/16
IL7M-7FBx2-P	IL7M-7FBSx2-P	2000	1/2-20	1/2	2-1/2	2	11/16
IL7M-7FBx4-P	IL7M-7FBSx4-P	2000	1/2-20	1/2	2-1/2	4	11/16
IL7M-8B-P	IL7M-8BS-P	2500	5/8-11	5/8	2-1/2	1-9/16	11/16
IL7M-8Bx3-P	IL7M-8BSx3-P	2500	5/8-11	5/8	2-1/2	3	11/16
IL7M-8Bx4-P	IL7M-8BSx4-P	2500	5/8-11	5/8	2-1/2	4	11/16
IL7M-8Bx5-P	IL7M-8BSx5-P	2500	5/8-11	5/8	2-1/2	5	11/16
IL7M-9B-P	IL7M-9BS-P	3000	3/4-10	3/4	2-1/2	1-9/16	11/16
IL7M-9Bx3-P	IL7M-9BSx3-P	3000	3/4-10	3/4	2-1/2	3	11/16
IL7M-9Bx4-P	IL7M-9BSx4-P	3000	3/4-10	3/4	2-1/2	4	11/16
IL8A-4Bx1/2-P	IL8A-4BSx1/2-P	100	1/4-20	1/2	3	1/2	11/16
IL8A-4Bx1-P	IL8A-4BSx1-P	100	1/4-20	1/2	3	1	11/16
IL8A-4B-P	IL8A-4BS-P	100	1/4-20	1/2	3	1-9/16	11/16
IL8A-4Bx25-P	IL8A-4BSx25-P	100	1/4-20	1/2	3	2-1/2	11/16
IL8A-5Bx3/4-P	IL8A-5BSx3/4-P	500	5/16-18	1/2	3	3/4	11/16
IL8A-5Bx15-HX-P	IL8A-5BSx15-HX-P	500	5/16-18	1/2	3	1-1/2	11/16
IL8A-5B-P	IL8A-5BS-P	500	5/16-18	1/2	3	1-9/16	11/16
IL8A-5Bx25-HX-P	IL8A-5BSx25-HX-P	500	5/16-18	1/2	3	2-1/2	11/16
IL8A-5Bx3-P	IL8A-5BSx3-P	500	5/16-18	1/2	3	3	11/16
IL8A-5Bx4-P	IL8A-5BSx4-P	500	5/16-18	1/2	3	4	11/16
IL8A-6Bx3/4-P	IL8A-6BSx3/4-P	1000	3/8-16	1/2	3	3/4	11/16
IL8A-6Bx15-HX-P	IL8A-6BSx15-HX-P	1000	3/8-16	1/2	3	1-1/2	11/16
IL8A-6B-P	IL8A-6BS-P	1000	3/8-16	1/2	3	1-9/16	11/16
IL8A-6Bx1-P	IL8A-6BSx1-P	1000	3/8-16	1/2	3	1	11/16
IL8A-6Bx2-P	IL8A-6BSx2-P	1000	3/8-16	1/2	3	2	11/16
IL8A-6Bx2-HX-P	IL8A-6BSx2-HX-P	1000	3/8-16	1/2	3	2	11/16
IL8A-6Bx3-P	IL8A-6BSx3-P	1000	3/8-16	1/2	3	3	11/16
IL8A-6Bx3-HX-P	IL8A-6BSx3-HX-P	1000	3/8-16	1/2	3	3	11/16
IL8A-6Bx4-P	IL8A-6BSx4-P	1000	3/8-16	1/2	3	4	11/16
IL8A-6Bx45-HX-P	IL8A-6BSx45-HX-P	1000	3/8-16	1/2	3	4-1/2	11/16
IL8A-6Bx6-HX-P	IL8A-6BSx6-HX-P	1000	3/8-16	1/2	3	6	11/16
IL8A-6FBx1-P	IL8A-6FBSx1-P	1000	3/8-24	1/2	3	1	11/16
IL8A-6FBx2-P	IL8A-6FBSx2-P	1000	3/8-24	1/2	3	2	11/16
IL8A-7B-P	IL8A-7BS-P	2000	1/2-13	1/2	3	1-9/16	11/16
IL8A-7Bx2-P	IL8A-7BSx2-P	2000	1/2-13	1/2	3	2	11/16
IL8A-7Bx2-HX-P	IL8A-7BSx2-HX-P	2000	1/2-13	1/2	3	2	11/16
IL8A-7Bx25-HX-P	IL8A-7BSx25-HX-P	2000	1/2-13	1/2	3	2-1/2	11/16
IL8A-7Bx3-P	IL8A-7BSx3-P	2000	1/2-13	1/2	3	3	11/16
IL8A-7Bx3-HX-P	IL8A-7BSx3-HX-P	2000	1/2-13	1/2	3	3	11/16
IL8A-7Bx35-HX-P	IL8A-7BSx35-HX-P	2000	1/2-13	1/2	3	3-1/2	11/16
IL8A-7Bx4-P	IL8A-7BSx4-P	2000	1/2-13	1/2	3	4	11/16
IL8A-7Bx4-HX-P	IL8A-7BSx4-HX-P	2000	1/2-13	1/2	3	4	11/16
IL8A-7Bx5-P	IL8A-7BSx5-P	2000	1/2-13	1/2	3	5	11/16
IL8A-7Bx5-HX-P	IL8A-7BSx5-HX-P	2000	1/2-13	1/2	3	5	11/16
IL8A-7Bx6-HX-P	IL8A-7BSx6-HX-P	1500	1/2-13	1/2	3	6	11/16
IL8A-7Bx8-HX-P	IL8A-7BSx8-HX-P	1000	1/2-13	1/2	3	8	11/16
IL8A-7FBx1-P	IL8A-7FBSx1-P	2000	1/2-20	1/2	3	1	11/16
IL8A-7FBx2-P	IL8A-7FBSx2-P	2000	1/2-20	1/2	3	2	11/16
IL8A-7FBx4-P	IL8A-7FBSx4-P	2000	1/2-20	1/2	3	4	11/16
IL8A-8B-P	IL8A-8BS-P	2500	5/8-11	5/8	3	1-9/16	11/16
IL8A-8Bx3-P	IL8A-8BSx3-P	2500	5/8-11	5/8	3	3	11/16
IL8A-8Bx4-P	IL8A-8BSx4-P	2500	5/8-11	5/8	3	4	11/16
IL8A-8Bx5-P	IL8A-8BSx5-P	2500	5/8-11	5/8	3	5	11/16
IL8A-9B-P	IL8A-9BS-P	3000	3/4-10	3/4	3	1-9/16	11/16
IL8A-9Bx3-P	IL8A-9BSx3-P	3000	3/4-10	3/4	3	3	11/16
IL8A-9Bx4-P	IL8A-9BSx4-P	3000	3/4-10	3/4	3	4	11/16



METRIC POLY BASE FIXED STUD LEVELING GLIDES


The IEC *Metric Poly Base Steel and Stainless Steel Fixed Stud Glide* offers metric threads and is ideal for medium-duty load requirements. The stud will tilt several degrees under load to adjust for unlevel surfaces. This glide is cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base. Some sizes available with Top-A-Just™ top broached hex, allen drive, (-BR) and top-end external hex (-HX).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

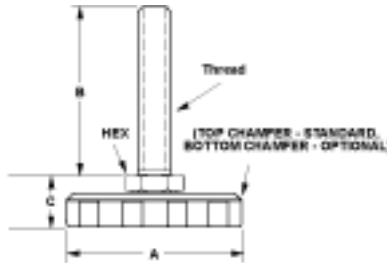

Optional bottom chamfer (reverse assembly) – with 90° top edge

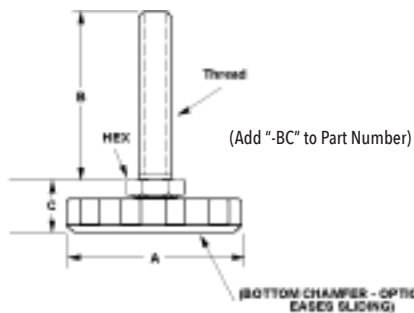

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7-M6Bx25	IL7-M6BSx25	100	M6	1/2	1	25	11/16
IL7-M6Bx38	IL7-M6BSx38	100	M6	1/2	1	38	11/16
IL7-M6Bx51	IL7-M6BSx51	100	M6	1/2	1	51	11/16
IL7-M8Bx38	IL7-M8BSx38	500	M8	1/2	1	38	11/16
IL7-M8Bx51	IL7-M8BSx51	500	M8	1/2	1	51	11/16
IL7-M8Bx62	IL7-M8BSx62	500	M8	1/2	1	62	11/16
IL7-M10Bx38	IL7-M10BSx38	1000	M10	1/2	1	38	11/16
IL7-M10Bx51	IL7-M10BSx51	1000	M10	1/2	1	51	11/16
IL7-M10Bx62	IL7-M10BSx62	1000	M10	1/2	1	62	11/16
IL7-M12Bx38	IL7-M12BSx38	2000	M12	1/2	1	38	11/16
IL7-M12Bx51	IL7-M12BSx51	2000	M12	1/2	1	51	11/16
IL7-M12Bx75	IL7-M12BSx75	2000	M12	1/2	1	75	11/16
IL7-M12Bx102	IL7-M12BSx102	2000	M12	1/2	1	102	11/16
IL7-M16Bx51	IL7-M16BSx51	2500	M16	5/8	1	51	11/16
IL7-M16Bx90-BR	IL7-M16BSx90-BR	2500	M16	5/8	1	90	11/16
IL7-M16Bx102	IL7-M16BSx102	2500	M16	5/8	1	102	11/16
IL7-M16Bx115-BR	IL7-M16BSx115-BR	2500	M16	5/8	1	115	11/16
IL8-M6Bx25	IL8-M6BSx25	100	M6	1/2	1-1/2	25	11/16
IL8-M6Bx38	IL8-M6BSx38	100	M6	1/2	1-1/2	38	11/16
IL8-M6Bx51	IL8-M6BSx51	100	M6	1/2	1-1/2	51	11/16
IL8-M8Bx38	IL8-M8BSx38	500	M8	1/2	1-1/2	38	11/16
IL8-M8Bx51	IL8-M8BSx51	500	M8	1/2	1-1/2	51	11/16
IL8-M8Bx62	IL8-M8BSx62	500	M8	1/2	1-1/2	62	11/16
IL8-M10Bx38	IL8-M10BSx38S	1000	M10	1/2	1-1/2	38	11/16
IL8-M10Bx51	IL8-M10BSx51S	1000	M10	1/2	1-1/2	51	11/16
IL8-M10Bx62	IL8-M10BSx62S	1000	M10	1/2	1-1/2	62	11/16
IL8-M12Bx38	IL8-M12BSx38	2000	M12	1/2	1-1/2	38	11/16
IL8-M12Bx51	IL8-M12BSx51	2000	M12	1/2	1-1/2	51	11/16
IL8-M12Bx75	IL8-M12BSx75	2000	M12	1/2	1-1/2	75	11/16
IL8-M12Bx102	IL8-M12BSx102	2000	M12	1/2	1-1/2	102	11/16
IL8-M16Bx51	IL8-M16BSx51	2500	M16	5/8	1-1/2	51	11/16
IL8-M16Bx90-BR	IL8-M16BSx90-BR	2500	M16	5/8	1-1/2	90	11/16
IL8-M16Bx102	IL8-M16BSx102	2500	M16	5/8	1-1/2	102	11/16
IL8-M16Bx115-BR	IL8-M16BSx115-BR	2500	M16	5/8	1-1/2	115	11/16
IL7A-M6Bx25	IL7A-M6BSx25	100	M6	1/2	2	25	11/16
IL7A-M6Bx38	IL7A-M6BSx38	100	M6	1/2	2	38	11/16
IL7A-M6Bx51	IL7A-M6BSx51	100	M6	1/2	2	51	11/16
IL7A-M8Bx38	IL7A-M8BSx38	500	M8	1/2	2	38	11/16
IL7A-M8Bx51	IL7A-M8BSx51	500	M8	1/2	2	51	11/16
IL7A-M8Bx62	IL7A-M8BSx62	500	M8	1/2	2	62	11/16
IL7A-M10Bx38	IL7A-M10BSx38	1000	M10	1/2	2	38	11/16
IL7A-M10Bx51	IL7A-M10BSx51	1000	M10	1/2	2	51	11/16
IL7A-M10Bx62	IL7A-M10BSx62	1000	M10	1/2	2	62	11/16
IL7A-M12Bx38	IL7A-M12BSx38	2000	M12	1/2	2	38	11/16
IL7A-M12Bx51	IL7A-M12BSx51	2000	M12	1/2	2	51	11/16
IL7A-M12Bx75	IL7A-M12BSx75	2000	M12	1/2	2	75	11/16
IL7A-M12Bx102	IL7A-M12BSx102	2000	M12	1/2	2	102	11/16
IL7A-M16Bx51	IL7A-M16BSx51	2500	M16	5/8	2	51	11/16
IL7A-M16Bx90-BR	IL7A-M16BSx90-BR	2500	M16	5/8	2	90	11/16
IL7A-M16Bx102	IL7A-M16BSx102	2500	M16	5/8	2	102	11/16
IL7A-M16Bx115-BR	IL7A-M16BSx115-BR	2500	M16	5/8	2	115	11/16

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

POLY FIXED - METRIC

KNOB STYLE GLIDES

**METRIC POLY BASE FIXED STUD
LEVELING GLIDES**


The IEC *Metric Poly Base Steel and Stainless Steel Fixed Stud Glide* offers metric threads and is ideal for medium-duty load requirements. The stud will tilt several degrees under load to adjust for unlevel surfaces. This glide is cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base. Some sizes available with Top-A-Just™ top broached hex, allen drive, (-BR) and top-end external hex (-HX).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

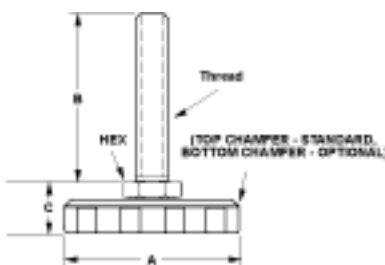

Optional bottom chamfer (reverse assembly) – with 90° top edge

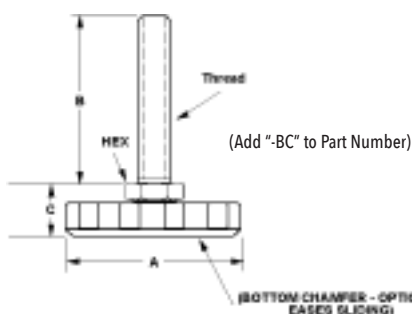**KNOB STYLE SOCKET TYPE
GLIDES (LEVELERS/KNOBS)**

These *low-profile polypropylene levelers/knobs* are designed for use with socket head allen bolts or threaded rod of various lengths. They are available with three different female thread types: brass insert (-BI), steel hex nut (-HN), or threads molded directly into the polypropylene (-MT). The height of all base sizes is 3/8" thick. The PVC base is a flexible, non-skid and non-marring, rubber-like material.



Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7M-M6Bx25	IL7M-M6BSx25	100	M6	1/2	2-1/2	25	11/16
IL7M-M6Bx38	IL7M-M6BSx38	100	M6	1/2	2-1/2	38	11/16
IL7M-M6Bx51	IL7M-M6BSx51	100	M6	1/2	2-1/2	51	11/16
IL7M-M8Bx38	IL7M-M8BSx38	500	M8	1/2	2-1/2	38	11/16
IL7M-M8Bx51	IL7M-M8BSx51	500	M8	1/2	2-1/2	51	11/16
IL7M-M8Bx62	IL7M-M8BSx62	500	M8	1/2	2-1/2	62	11/16
IL7M-M10Bx38	IL7M-M10BSx38	1000	M10	1/2	2-1/2	38	11/16
IL7M-M10Bx51	IL7M-M10BSx51	1000	M10	1/2	2-1/2	51	11/16
IL7M-M10Bx62	IL7M-M10BSx62	1000	M10	1/2	2-1/2	62	11/16
IL7M-M12Bx38	IL7M-M12BSx38	2000	M12	1/2	2-1/2	38	11/16
IL7M-M12Bx51	IL7M-M12BSx51	2000	M12	1/2	2-1/2	51	11/16
IL7M-M12Bx75	IL7M-M12BSx75	2000	M12	1/2	2-1/2	75	11/16
IL7M-M12Bx102	IL7M-M12BSx102	2000	M12	1/2	2-1/2	102	11/16
IL7M-M16Bx51	IL7M-M16BSx51	2500	M16	5/8	2-1/2	51	11/16
IL7M-M16Bx90-BR	IL7M-M16BSx90-BR	2500	M16	5/8	2-1/2	90	11/16
IL7M-M16Bx102	IL7M-M16BSx102	2500	M16	5/8	2-1/2	102	11/16
IL7M-M16Bx115-BR	IL7M-M16BSx115-BR	2500	M16	5/8	2-1/2	115	11/16
IL8A-M6Bx25	IL8A-M6BSx25	100	M6	1/2	3	25	11/16
IL8A-M6Bx38	IL8A-M6BSx38	100	M6	1/2	3	38	11/16
IL8A-M6Bx51	IL8A-M6BSx51	100	M6	1/2	3	51	11/16
IL8A-M8Bx38	IL8A-M8BSx38	500	M8	1/2	3	38	11/16
IL8A-M8Bx51	IL8A-M8BSx51	500	M8	1/2	3	51	11/16
IL8A-M8Bx62	IL8A-M8BSx62	500	M8	1/2	3	62	11/16
IL8A-M10Bx38	IL8A-M10BSx38	1000	M10	1/2	3	38	11/16
IL8A-M10Bx51	IL8A-M10BSx51	1000	M10	1/2	3	51	11/16
IL8A-M10Bx62	IL8A-M10BSx62	1000	M10	1/2	3	62	11/16
IL8A-M12Bx38	IL8A-M12BSx38	2000	M12	1/2	3	38	11/16
IL8A-M12Bx51	IL8A-M12BSx51	2000	M12	1/2	3	51	11/16
IL8A-M12Bx75	IL8A-M12BSx75	2000	M12	1/2	3	75	11/16
IL8A-M12Bx102	IL8A-M12BSx102	2000	M12	1/2	3	102	11/16
IL8A-M16Bx51	IL8A-M16BSx51	2500	M16	5/8	3	51	11/16
IL8A-M16Bx90-BR	IL8A-M16BSx90-BR	2500	M16	5/8	3	90	11/16
IL8A-M16Bx102	IL8A-M16BSx102	2500	M16	5/8	3	102	11/16
IL8A-M16Bx115-BR	IL8A-M16BSx115-BR	2500	M16	5/8	3	115	11/16

PN (brass)	PN (hex nut)	PN (molded)	Thread	Base Dia.	Load (lbs.)
IL83-4B-BI	IL83-4B-HN	IL83-4B-MT	1/4-20	1-1/2	100
IL83-5B-BI	IL83-5B-HN	IL83-5B-MT	5/16-18	1-1/2	250
IL83-6B-BI	IL83-6B-HN	IL83-6B-MT	3/8-16	1-1/2	250
IL85-4B-BI	IL85-4B-HN	IL85-4B-MT	1/4-20	2	100
IL85-5B-BI	IL85-5B-HN	IL85-5B-MT	5/16-18	2	250
IL85-6B-BI	IL85-6B-HN	IL85-6B-MT	3/8-16	2	250
IL87-4B-BI	IL87-4B-HN	IL87-4B-MT	1/4-20	2-1/2	100
IL87-5B-BI	IL87-5B-HN	IL87-5B-MT	5/16-18	2-1/2	250
IL87-6B-BI	IL87-6B-HN	IL87-6B-MT	3/8-16	2-1/2	250
IL89-4B-BI	IL89-4B-HN	IL89-4B-MT	1/4-20	3	100
IL89-5B-BI	IL89-5B-HN	IL89-5B-MT	5/16-18	3	250
IL89-6B-BI	IL89-6B-HN	IL89-6B-MT	3/8-16	3	250

PN (PVC)	Thread	Base Dia.	Load (lbs.)
IL83-4B-HN-PVC	1/4-20	1-1/2	75
IL83-5B-HN-PVC	5/16-18	1-1/2	75
IL83-6B-HN-PVC	3/8-16	1-1/2	75



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com



MEDIUM-DUTY LEVELERS

POLY FIXED SOCKET

POLY BASE FIXED SOCKET LEVELING GLIDES


The IEC Poly Base Steel and Stainless Steel Fixed Socket Glide is ideal for medium-duty load requirements. A cost-effective socket glide suitable for applications not requiring a swivel base. Features a black polypropylene base and large adjustment hex nut.

Also available with non-skid, non-marring rubber pad.

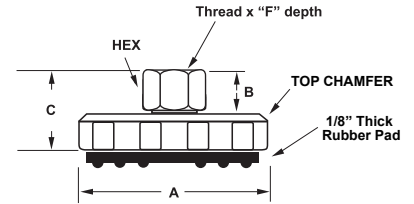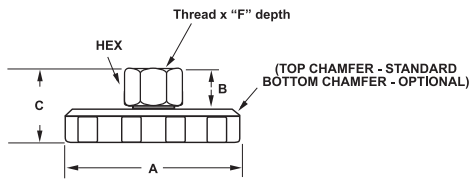

Optional bottom chamfer (reverse assembly)

(Add "-BC" to Part Number)

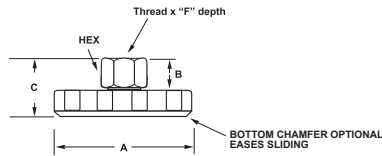

Rubber Pad Bottom View

LOW PROFILE POLY FIXED — SOCKET LEVELERS

Steel	Steel w/Rubber Pad	Stainless	Stainless w/Rubber Pad	Load	Thread	Hex	A	B	C	F
IL7-4B-T	IL7-4B-T-P	IL7-4BS-T	IL7-4BS-T-P	100	1/4-20	1/2	1	1/4	5/8	1/4
IL7-5B-T	IL7-5B-T-P	IL7-5BS-T	IL7-5BS-T-P	500	5/16-18	1/2	1	3/8	3/4	1/4
IL7-6B-T	IL7-6B-T-P	IL7-6BS-T	IL7-6BS-T-P	1000	3/8-16	1/2	1	1/2	7/8	3/8
IL7-7B-T	IL7-7B-T-P	IL7-7BS-T	IL7-7BS-T-P	2000	1/2-13	5/8	1	1/2	7/8	3/8
IL7-8B-T	IL7-8B-T-P	IL7-8BS-T	IL7-8BS-T-P	3000	5/8-11	3/4	1	5/8	1	1/2
IL7-9B-T	IL7-9B-T-P	IL7-9BS-T	IL7-9BS-T-P	3000	3/4-10	1	1	3/4	1-1/8	5/8
IL8-4B-T	IL8-4B-T-P	IL8-4BS-T	IL8-4BS-T-P	100	1/4-20	1/2	1-1/2	1/4	5/8	1/4
IL8-5B-T	IL8-5B-T-P	IL8-5BS-T	IL8-5BS-T-P	500	5/16-18	1/2	1-1/2	3/8	3/4	1/4
IL8-6B-T	IL8-6B-T-P	IL8-6BS-T	IL8-6BS-T-P	1000	3/8-16	1/2	1-1/2	1/2	7/8	3/8
IL8-7B-T	IL8-7B-T-P	IL8-7BS-T	IL8-7BS-T-P	2000	1/2-13	5/8	1-1/2	1/2	7/8	3/8
IL8-8B-T	IL8-8B-T-P	IL8-8BS-T	IL8-8BS-T-P	3000	5/8-11	3/4	1-1/2	5/8	1	1/2
IL8-9B-T	IL8-9B-T-P	IL8-9BS-T	IL8-9BS-T-P	3000	3/4-10	1	1-1/2	3/4	1-1/8	5/8
IL7A-4B-T	IL7A-4B-T-P	IL7A-4BS-T	IL7A-4BS-T-P	100	1/4-20	1/2	2	1/4	5/8	1/4
IL7A-5B-T	IL7A-5B-T-P	IL7A-5BS-T	IL7A-5BS-T-P	500	5/16-18	1/2	2	3/8	3/4	1/4
IL7A-6B-T	IL7A-6B-T-P	IL7A-6BS-T	IL7A-6BS-T-P	1000	3/8-16	1/2	2	1/2	7/8	3/8
IL7A-7B-T	IL7A-7B-T-P	IL7A-7BS-T	IL7A-7BS-T-P	2000	1/2-13	5/8	2	1/2	7/8	3/8
IL7A-8B-T	IL7A-8B-T-P	IL7A-8BS-T	IL7A-8BS-T-P	3000	5/8-11	3/4	2	5/8	1	1/2
IL7A-9B-T	IL7A-9B-T-P	IL7A-9BS-T	IL7A-9BS-T-P	3000	3/4-10	1	2	3/4	1-1/8	5/8
IL7M-4B-T		IL7M-4BS-T		100	1/4-20	1/2	2-1/2	1/4	5/8	1/4
IL7M-5B-T		IL7M-5BS-T		500	5/16-18	1/2	2-1/2	3/8	3/4	1/4
IL7M-6B-T		IL7M-6BS-T		1000	3/8-16	1/2	2-1/2	1/2	7/8	3/8
IL7M-7B-T		IL7M-7BS-T		2000	1/2-13	5/8	2-1/2	1/2	7/8	3/8
IL7M-8B-T		IL7M-8BS-T		3000	5/8-11	3/4	2-1/2	5/8	1	1/2
IL7M-9B-T		IL7M-9BS-T		3000	3/4-10	1	2-1/2	3/4	1-1/8	5/8
IL8A-4B-T	IL8A-4B-T-P	IL8A-4BS-T	IL8A-4BS-T-P	100	1/4-20	1/2	3	1/4	5/8	1/4
IL8A-5B-T	IL8A-5B-T-P	IL8A-5BS-T	IL8A-5BS-T-P	500	5/16-18	1/2	3	3/8	3/4	1/4
IL8A-6B-T	IL8A-6B-T-P	IL8A-6BS-T	IL8A-6BS-T-P	1000	3/8-16	1/2	3	1/2	7/8	3/8
IL8A-7B-T	IL8A-7B-T-P	IL8A-7BS-T	IL8A-7BS-T-P	2000	1/2-13	5/8	3	1/2	7/8	3/8
IL8A-8B-T	IL8A-8B-T-P	IL8A-8BS-T	IL8A-8BS-T-P	3000	5/8-11	3/4	3	5/8	1	1/2
IL8A-9B-T	IL8A-9B-T-P	IL8A-9BS-T	IL8A-9BS-T-P	3000	3/4-10	1	3	3/4	1-1/8	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com

MEDIUM-DUTY LEVELERS

POLY FIXED SOCKET—METRIC


METRIC POLY BASE FIXED SOCKET LEVELING GLIDES

The IEC *Metric Poly Base Steel and Stainless Steel Fixed Socket Glide* is ideal for medium-duty load requirements. A cost-effective socket glide suitable for applications not requiring a swivel base. Features a black polypropylene base and large adjustment hex nut.

Also available with non-skid, non-marring rubber pad.





Rubber Pad Bottom View

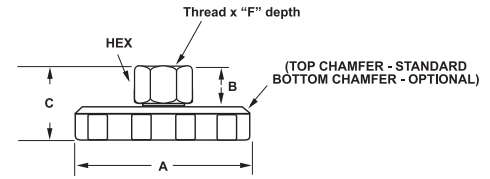

Optional bottom chamfer (reverse assembly)

(Add "-BC" to Part Number)

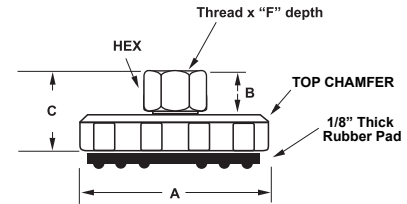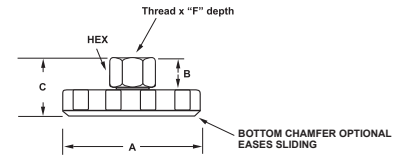

LOW PROFILE POLY FIXED — METRIC SOCKET LEVELERS

Steel	Steel w/Rubber Pad	Stainless	Stainless w/Rubber Pad	Load	Thread	Hex	A	B	C	F
IL7-M6B-T	IL7-M6B-T-P	IL7-M6BS-T	IL7-M6BS-T-P	100	M6x1	1/2	1	1/4	5/8	1/4
IL7-M8B-T	IL7-M8B-T-P	IL7-M8BS-T	IL7-M8BS-T-P	500	M8x1.25	1/2	1	3/8	3/4	1/4
IL7-M10B-T	IL7-M10B-T-P	IL7-M10BS-T	IL7-M10BS-T-P	1000	M10x1.50	1/2	1	1/2	7/8	3/8
IL7-M12B-T	IL7-M12B-T-P	IL7-M12BS-T	IL7-M12BS-T-P	2000	M12x1.75	5/8	1	1/2	7/8	3/8
IL7-M16B-T	IL7-M16B-T-P	IL7-M16BS-T	IL7-M16BS-T-P	3000	M16x2.00	3/4	1	5/8	1	1/2
IL7-M20B-T	IL7-M20B-T-P	IL7-M20BS-T	IL7-M20BS-T-P	3000	M20x3.00	1	1	3/4	1-1/8	5/8
IL8-M6B-T	IL8-M6B-T-P	IL8-M6BS-T	IL8-M6BS-T-P	100	M6x1	1/2	1-1/2	1/4	5/8	1/4
IL8-M8B-T	IL8-M8B-T-P	IL8-M8BS-T	IL8-M8BS-T-P	500	M8x1.25	1/2	1-1/2	3/8	3/4	1/4
IL8-M10B-T	IL8-M10B-T-P	IL8-M10BS-T	IL8-M10BS-T-P	1000	M10x1.50	1/2	1-1/2	1/2	7/8	3/8
IL8-M12B-T	IL8-M12B-T-P	IL8-M12BS-T	IL8-M12BS-T-P	2000	M12x1.75	5/8	1-1/2	1/2	7/8	3/8
IL8-M16B-T	IL8-M16B-T-P	IL8-M16BS-T	IL8-M16BS-T-P	3000	M16x2.00	3/4	1-1/2	5/8	1	1/2
IL8-M20B-T	IL8-M20B-T-P	IL8-M20BS-T	IL8-M20BS-T-P	3000	M20x3.00	1	1-1/2	3/4	1-1/8	5/8
IL7A-M6B-T	IL7A-M6B-T-P	IL7A-M6BS-T	IL7A-M6BS-T-P	100	M6x1	1/2	2	1/4	5/8	1/4
IL7A-M8B-T	IL7A-M8B-T-P	IL7A-M8BS-T	IL7A-M8BS-T-P	500	M8x1.25	1/2	2	3/8	3/4	1/4
IL7A-M10B-T	IL7A-M10B-T-P	IL7A-M10BS-T	IL7A-M10BS-T-P	1000	M10x1.50	1/2	2	1/2	7/8	3/8
IL7A-M12B-T	IL7A-M12B-T-P	IL7A-M12BS-T	IL7A-M12BS-T-P	2000	M12x1.75	5/8	2	1/2	7/8	3/8
IL7A-M16B-T	IL7A-M16B-T-P	IL7A-M16BS-T	IL7A-M16BS-T-P	3000	M16x2.00	3/4	2	5/8	1	1/2
IL7A-M20B-T	IL7A-M20B-T-P	IL7A-M20BS-T	IL7A-M20BS-T-P	3000	M20x3.00	1	2	3/4	1-1/8	5/8
IL7M-M6B-T		IL7M-M6BS-T		100	M6x1	1/2	2-1/2	1/4	5/8	1/4
IL7M-M8B-T		IL7M-M8BS-T		500	M8x1.25	1/2	2-1/2	3/8	3/4	1/4
IL7M-M10B-T		IL7M-M10BS-T		1000	M10x1.50	1/2	2-1/2	1/2	7/8	3/8
IL7M-M12B-T		IL7M-M12BS-T		2000	M12x1.75	5/8	2-1/2	1/2	7/8	3/8
IL7M-M16B-T		IL7M-M16BS-T		3000	M16x2.00	3/4	2-1/2	5/8	1	1/2
IL7M-M20B-T		IL7M-M20BS-T		3000	M20x3.00	1	2-1/2	3/4	1-1/8	5/8
IL8A-M6B-T	IL8A-M6B-T-P	IL8A-M6BS-T	IL8A-M6BS-T-P	100	M6x1	1/2	3	1/4	5/8	1/4
IL8A-M8B-T	IL8A-M8B-T-P	IL8A-M8BS-T	IL8A-M8BS-T-P	500	M8x1.25	1/2	3	3/8	3/4	1/4
IL8A-M10B-T	IL8A-M10B-T-P	IL8A-M10BS-T	IL8A-M10BS-T-P	1000	M10x1.50	1/2	3	1/2	7/8	3/8
IL8A-M12B-T	IL8A-M12B-T-P	IL8A-M12BS-T	IL8A-M12BS-T-P	2000	M12x1.75	5/8	3	1/2	7/8	3/8
IL8A-M16B-T	IL8A-M16B-T-P	IL8A-M16BS-T	IL8A-M16BS-T-P	3000	M16x2.00	3/4	3	5/8	1	1/2
IL8A-M20B-T	IL8A-M20B-T-P	IL8A-M20BS-T	IL8A-M20BS-T-P	3000	M20x3.00	1	3	3/4	1-1/8	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**HI-PRO® FIXED STUD KNOB STYLE GLIDES**

1-1/2" to 2" BASE DIAMETER - 1" TALL

Hi-Pro® Fixed Stud Knob Style Glides®

The IEC *high-profile fixed stud knob style glide* features IEC's Ridge-Grip® design and polypropylene. Especially useful for raising electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. See IEC's vibration glides in the Light Duty Ruggedized Glides catalog.


The steel stud has trivalent clear zinc plating. Also available with a steel female socket with 1/2-13 or 3/8-16 thread, or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features

- Ridge-Grip® base design
- Loads to 2000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant
- Top hex and slot options

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment

Top Hex (-HX)
and Slot (-SL)

Knob Style Glide Bottom

- Fixed Stud Knob Style Glide® -

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Stud Knob Style Glides						
IL82-HP-4Bx1/4	IL82-HP-4BSx1/4	100	1/4-20	1-1/2	1/4	1
IL82-HP-4Bx1/2	IL82-HP-4BSx1/2	100	1/4-20	1-1/2	1/2	1
IL82-HP-4Bx1/2-HX-SL		100	1/4-20	1-1/2	1/2	1
IL82-HP-4Bx3/4	IL82-HP-4BSx3/4	100	1/4-20	1-1/2	3/4	1
IL82-HP-4Bx3/4-HX-SL		100	1/4-20	1-1/2	3/4	1
IL82-HP-4Bx1	IL82-HP-4BSx1	100	1/4-20	1-1/2	1	1
IL82-HP-4Bx1-HX-SL		100	1/4-20	1-1/2	1	1
IL82-HP-4Bx125	IL82-HP-4BSx125	100	1/4-20	1-1/2	1-1/4	1
IL82-HP-4Bx125-HX-SL		100	1/4-20	1-1/2	1-1/4	1
IL82-HP-4Bx150	IL82-HP-4BSx150	100	1/4-20	1-1/2	1-1/2	1
IL82-HP-4Bx175	IL82-HP-4BSx175	100	1/4-20	1-1/2	1-3/4	1
IL82-HP-4Bx175-HX-SL		100	1/4-20	1-1/2	1-3/4	1
IL82-HP-4Bx2	IL82-HP-4BSx2	100	1/4-20	1-1/2	2	1
IL82-HP-4Bx275	IL82-HP-4BSx275	100	1/4-20	1-1/2	2-3/4	1
IL82-HP-5Bx1/4	IL82-HP-5BSx1/4	500	5/16-18	1-1/2	1/4	1
IL82-HP-5Bx1/2	IL82-HP-5BSx1/2	500	5/16-18	1-1/2	1/2	1
IL82-HP-5Bx1/2-HX-SL		500	5/16-18	1-1/2	1/2	1
IL82-HP-5Bx3/4	IL82-HP-5BSx3/4	500	5/16-18	1-1/2	3/4	1
IL82-HP-5Bx3/4-HX-SL		500	5/16-18	1-1/2	3/4	1
IL82-HP-5Bx1	IL82-HP-5BSx1	500	5/16-18	1-1/2	1	1
IL82-HP-5Bx1-HX-SL		500	5/16-18	1-1/2	1	1
IL82-HP-5Bx125-HX-SL		500	5/16-18	1-1/2	1-1/4	1
IL82-HP-5Bx125	IL82-HP-5BSx125	500	5/16-18	1-1/2	1-1/4	1
IL82-HP-5Bx175	IL82-HP-5BSx175	500	5/16-18	1-1/2	1-3/4	1
IL82-HP-5Bx175-HX-SL		500	5/16-18	1-1/2	1-3/4	1
IL82-HP-5Bx225-HX-SL		500	5/16-18	1-1/2	2-1/4	1
IL82-HP-6Bx1/4	IL82-HP-6BSx1/4	1000	3/8-16	1-1/2	1/4	1
IL82-HP-6Bx1/2	IL82-HP-6BSx1/2	1000	3/8-16	1-1/2	1/2	1
IL82-HP-6Bx1/2-HX-SL		1000	3/8-16	1-1/2	1/2	1
IL82-HP-6Bx3/4-HX-SL		1000	3/8-16	1-1/2	3/4	1
IL82-HP-6Bx1	IL82-HP-6BSx1	1000	3/8-16	1-1/2	1	1
IL82-HP-6Bx1-HX-SL		1000	3/8-16	1-1/2	1	1
IL82-HP-6Bx125	IL82-HP-6BSx125	1000	3/8-16	1-1/2	1-1/4	1
IL82-HP-6Bx125-HX-SL		1000	3/8-16	1-1/2	1-1/4	1
IL82-HP-6Bx150	IL82-HP-6BSx150	1000	3/8-16	1-1/2	1-1/2	1
IL82-HP-6Bx175-HX-SL		1000	3/8-16	1-1/2	1-3/4	1
IL82-HP-6Bx175	IL82-HP-6BSx175	1000	3/8-16	1-1/2	1-3/4	1
IL82-HP-6Bx238	IL82-HP-6BSx238	1000	3/8-16	1-1/2	2-3/8	1
IL82-HP-6Bx238-SL		1000	3/8-16	1-1/2	2-3/8	1
IL82-HP-6Bx238-HX-SL		1000	3/8-16	1-1/2	2-3/8	1
IL82-HP-6Bx275-HX-SL		1000	3/8-16	1-1/2	2-3/4	1
IL82-HP-6Bx338-HX-SL		1000	3/8-16	1-1/2	3-3/8	1
IL82-HP-7Bx3/4	IL82-HP-7BSx3/4	2000	1/2-13	1-1/2	3/4	1
IL82-HP-7Bx1	IL82-HP-7BSx1	2000	1/2-13	1-1/2	1	1
IL82-HP-7Bx125	IL82-HP-7BSx125	2000	1/2-13	1-1/2	1-1/4	1
IL82-HP-7Bx150	IL82-HP-7BSx150	2000	1/2-13	1-1/2	1-1/2	1
IL82-HP-7Bx2	IL82-HP-7BSx2	2000	1/2-13	1-1/2	2	1
IL82-HP-7Bx238		2000	1/2-13	1-1/2	2-3/8	1
IL82-HP-7Bx238-HX		2000	1/2-13	1-1/2	2-3/8	1
IL82-HP-7Bx278	IL82-HP-7BSx278	2000	1/2-13	1-1/2	2-7/8	1
IL82-HP-7Bx3-HX		2000	1/2-13	1-1/2	3	1

Note: These fixed stud knob style glides are also available in a rubber base in addition to these plastic bases. See IEC's Vibe-Glide® vibration dampening catalog for options.

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**HI-PRO® FIXED STUD KNOB STYLE GLIDES**

1-1/2" to 2" BASE DIAMETER - 1" TALL

Hi-Pro® Fixed Stud Knob Style Glides®

The IEC *high-profile fixed stud knob style glide* features IEC's Ridge-Grip® design and polypropylene. Especially useful for raising electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. See IEC's vibration glides in the Light Duty Ruggedized Glides catalog.


The steel stud has trivalent clear zinc plating. Also available with a steel female socket with 1/2-13 or 3/8-16 thread, or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features

- Ridge-Grip® base design
- Loads to 2000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant
- Top hex and slot options

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment

Top Hex (-HX)
and Slot (-SL)

Knob Style Glide Bottom

- Fixed Stud Knob Style Glide® -

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Stud Knob Style Glides						
IL84-HP-4Bx1/4	IL84-HP-4BSx1/4	100	1/4-20	2	1/4	1
IL84-HP-4Bx1/2	IL84-HP-4BSx1/2	100	1/4-20	2	1/2	1
IL84-HP-4Bx1/2-HX-SL		100	1/4-20	2	1/2	1
IL84-HP-4Bx3/4	IL84-HP-4BSx3/4	100	1/4-20	2	3/4	1
IL84-HP-4Bx3/4-HX-SL		100	1/4-20	2	3/4	1
IL84-HP-4Bx1	IL84-HP-4BSx1	100	1/4-20	2	1	1
IL84-HP-4Bx1-HX-SL		100	1/4-20	2	1	1
IL84-HP-4Bx125	IL84-HP-4BSx125	100	1/4-20	2	1-1/4	1
IL84-HP-4Bx125-HX-SL		100	1/4-20	2	1-1/4	1
IL84-HP-4Bx150	IL84-HP-4BSx150	100	1/4-20	2	1-1/2	1
IL84-HP-4Bx175	IL84-HP-4BSx175	100	1/4-20	2	1-3/4	1
IL84-HP-4Bx175-HX-SL		100	1/4-20	2	1-3/4	1
IL84-HP-4Bx2	IL84-HP-4BSx2	100	1/4-20	2	2	1
IL84-HP-4Bx275	IL84-HP-4BSx275	100	1/4-20	2	2-3/4	1
IL84-HP-5Bx1/4	IL84-HP-5BSx1/4	500	5/16-18	2	1/4	1
IL84-HP-5Bx1/2	IL84-HP-5BSx1/2	500	5/16-18	2	1/2	1
IL84-HP-5Bx1/2-HX-SL		500	5/16-18	2	1/2	1
IL84-HP-5Bx3/4	IL84-HP-5BSx3/4	500	5/16-18	2	3/4	1
IL84-HP-5Bx3/4-HX-SL		500	5/16-18	2	3/4	1
IL84-HP-5Bx1	IL84-HP-5BSx1	500	5/16-18	2	1	1
IL84-HP-5Bx1-HX-SL		500	5/16-18	2	1	1
IL84-HP-5Bx125-HX-SL		500	5/16-18	2	1-1/4	1
IL84-HP-5Bx125	IL84-HP-5BSx125	500	5/16-18	2	1-1/4	1
IL84-HP-5Bx175	IL84-HP-5BSx175	500	5/16-18	2	1-3/4	1
IL84-HP-5Bx175-HX-SL		500	5/16-18	2	1-3/4	1
IL84-HP-5Bx225-HX-SL		500	5/16-18	2	2-1/4	1
IL84-HP-6Bx1/4	IL84-HP-6BSx1/4	1000	3/8-16	2	1/4	1
IL84-HP-6Bx1/2	IL84-HP-6BSx1/2	1000	3/8-16	2	1/2	1
IL84-HP-6Bx1/2-HX-SL		1000	3/8-16	2	1/2	1
IL84-HP-6Bx3/4-HX-SL		1000	3/8-16	2	3/4	1
IL84-HP-6Bx1	IL84-HP-6BSx1	1000	3/8-16	2	1	1
IL84-HP-6Bx1-HX-SL		1000	3/8-16	2	1	1
IL84-HP-6Bx125	IL84-HP-6BSx125	1000	3/8-16	2	1-1/4	1
IL84-HP-6Bx125-HX-SL		1000	3/8-16	2	1-1/4	1
IL84-HP-6Bx150	IL84-HP-6BSx150	1000	3/8-16	2	1-1/2	1
IL84-HP-6Bx175-HX-SL		1000	3/8-16	2	1-3/4	1
IL84-HP-6Bx175	IL84-HP-6BSx175	1000	3/8-16	2	1-3/4	1
IL84-HP-6Bx238	IL84-HP-6BSx238	1000	3/8-16	2	2-3/8	1
IL84-HP-6Bx238-SL		1000	3/8-16	2	2-3/8	1
IL84-HP-6Bx238-HX-SL		1000	3/8-16	2	2-3/8	1
IL84-HP-6Bx275-HX-SL		1000	3/8-16	2	2-3/4	1
IL84-HP-6Bx338-HX-SL		1000	3/8-16	2	3-3/8	1
IL84-HP-7Bx3/4	IL84-HP-7BSx3/4	2000	1/2-13	2	3/4	1
IL84-HP-7Bx1	IL84-HP-7BSx1	2000	1/2-13	2	1	1
IL84-HP-7Bx125	IL84-HP-7BSx125	2000	1/2-13	2	1-1/4	1
IL84-HP-7Bx150	IL84-HP-7BSx150	2000	1/2-13	2	1-1/2	1
IL84-HP-7Bx2	IL84-HP-7BSx2	2000	1/2-13	2	2	1
IL84-HP-7Bx238		2000	1/2-13	2	2-3/8	1
IL84-HP-7Bx238-HX		2000	1/2-13	2	2-3/8	1
IL84-HP-7Bx278	IL84-HP-7BSx278	2000	1/2-13	2	2-7/8	1
IL84-HP-7Bx3-HX		2000	1/2-13	2	3	1

Note: These fixed stud knob style glides are also available in a rubber base in addition to these plastic bases. See IEC's Vibe-Glide® vibration dampening catalog for options.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

HI-PRO® POLY FIXED STUD

1-1/2" BASE DIAMETER - 1" TALL

HI-PRO® POLY BASE FIXED STUD GLIDES


The IEC High Profile Steel and Stainless Steel Poly Base Fixed Stud Glide features IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 1" and 2" thick. Two base sizes to choose from (1-1/2" to 2"). Many sizes available with Top-A-Just® top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just® (-HX)



Top-A-Just® (-BR)



Features

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant
- Top hex options

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables

Steel	SS	Load	Thread	Hex	A	B	C
High Profile Steel and Stainless Steel Poly Base Fixed Stud Glides							
IL140-4Bx1/2	IL140-4BSx1/2	100	1/4-20	1/2	1-1/2	1/2	1-5/16
IL140-4Bx1	IL140-4BSx1	100	1/4-20	1/2	1-1/2	1	1-5/16
IL140-4B	IL140-4BS	100	1/4-20	1/2	1-1/2	1-9/16	1-5/16
IL140-4Bx2-HX	IL140-4BSx2-HX	100	1/4-20	1/2	1-1/2	2	1-5/16
IL140-4Bx2.5	IL140-4BSx2.5	100	1/4-20	1/2	1-1/2	2-1/2	1-5/16
IL140-5Bx3/4	IL140-5BSx3/4	500	5/16-18	1/2	1-1/2	3/4	1-5/16
IL140-5Bx1.5-HX	IL140-5BSx1.5-HX	500	5/16-18	1/2	1-1/2	1-1/2	1-5/16
IL140-5B	IL140-5BS	500	5/16-18	1/2	1-1/2	1-9/16	1-5/16
IL140-5Bx2.5-HX	IL140-5BSx2.5-HX	500	5/16-18	1/2	1-1/2	2-1/2	1-5/16
IL140-5Bx3	IL140-5BSx3	500	5/16-18	1/2	1-1/2	3	1-5/16
IL140-5Bx4	IL140-5BSx4	500	5/16-18	1/2	1-1/2	4	1-5/16
IL140-6Bx3/4	IL140-6BSx3/4	1000	3/8-16	1/2	1-1/2	3/4	1-5/16
IL140-6Bx1.5-HX	IL140-6BSx1.5-HX	1000	3/8-16	1/2	1-1/2	1-1/2	1-5/16
IL140-6B	IL140-6BS	1000	3/8-16	1/2	1-1/2	1-9/16	1-5/16
IL140-6Bx1	IL140-6BSx1	1000	3/8-16	1/2	1-1/2	1	1-5/16
IL140-6Bx2	IL140-6BSx2	1000	3/8-16	1/2	1-1/2	2	1-5/16
IL140-6Bx2-HX	IL140-6BSx2-HX	1000	3/8-16	1/2	1-1/2	2	1-5/16
IL140-6Bx3	IL140-6BSx3	1000	3/8-16	1/2	1-1/2	3	1-5/16
IL140-6Bx3-HX	IL140-6BSx3-HX	1000	3/8-16	1/2	1-1/2	3	1-5/16
IL140-6Bx4	IL140-6BSx4	1000	3/8-16	1/2	1-1/2	4	1-5/16
IL140-6Bx4.5-HX	IL140-6BSx4.5-HX	1000	3/8-16	1/2	1-1/2	4-1/2	1-5/16
IL140-6Bx6-HX	IL140-6BSx6-HX	1000	3/8-16	1/2	1-1/2	6	1-5/16
IL140-6FBx1	IL140-6FBSx1	1000	3/8-24	1/2	1-1/2	1	1-5/16
IL140-6FBx2	IL140-6FBSx2	1000	3/8-24	1/2	1-1/2	2	1-5/16
IL140-7B	IL140-7BS	2000	1/2-13	1/2	1-1/2	1-9/16	1-5/16
IL140-7Bx2	IL140-7BSx2	2000	1/2-13	1/2	1-1/2	2	1-5/16
IL140-7Bx2-HX	IL140-7BSx2-HX	2000	1/2-13	1/2	1-1/2	2	1-5/16
IL140-7Bx2.5-HX	IL140-7BSx2.5-HX	2000	1/2-13	1/2	1-1/2	2-1/2	1-5/16
IL140-7Bx3	IL140-7BSx3	2000	1/2-13	1/2	1-1/2	3	1-5/16
IL140-7Bx3-HX	IL140-7BSx3-HX	2000	1/2-13	1/2	1-1/2	3	1-5/16
IL140-7Bx3.5-HX	IL140-7BSx3.5-HX	2000	1/2-13	1/2	1-1/2	3-1/2	1-5/16
IL140-7Bx4	IL140-7BSx4	2000	1/2-13	1/2	1-1/2	4	1-5/16
IL140-7Bx4-HX	IL140-7BSx4-HX	2000	1/2-13	1/2	1-1/2	4	1-5/16
IL140-7Bx5	IL140-7BSx5	2000	1/2-13	1/2	1-1/2	5	1-5/16
IL140-7Bx5-HX	IL140-7BSx5-HX	2000	1/2-13	1/2	1-1/2	5	1-5/16
IL140-7Bx6-HX	IL140-7BSx6-HX	1500	1/2-13	1/2	1-1/2	6	1-5/16
IL140-7Bx8-HX	IL140-7BSx8-HX	1000	1/2-13	1/2	1-1/2	8	1-5/16
IL140-7FBx1	IL140-7FBSx1	2000	1/2-20	1/2	1-1/2	1	1-5/16
IL140-7FBx2	IL140-7FBSx2	2000	1/2-20	1/2	1-1/2	2	1-5/16
IL140-7FBx4	IL140-7FBSx4	2000	1/2-20	1/2	1-1/2	4	1-5/16
IL140-8B	IL140-8BS	2500	5/8-11	5/8	1-1/2	1-9/16	1-5/16
IL140-8Bx3	IL140-8BSx3	2500	5/8-11	5/8	1-1/2	3	1-5/16
IL140-8Bx4	IL140-8BSx4	2500	5/8-11	5/8	1-1/2	4	1-5/16
IL140-8Bx5	IL140-8BSx5	2500	5/8-11	5/8	1-1/2	5	1-5/16
IL140-9B	IL140-9BS	3000	3/4-10	3/4	1-1/2	1-9/16	1-5/16
IL140-9Bx3	IL140-9BSx3	3000	3/4-10	3/4	1-1/2	3	1-5/16
IL140-9Bx4	IL140-9BSx4	3000	3/4-10	3/4	1-1/2	4	1-5/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

HI-PRO® POLY FIXED STUD

2" BASE DIAMETER - 1" TALL

HI-PRO® POLY BASE FIXED STUD GLIDES


The IEC High Profile Steel and Stainless Steel Poly Base Fixed Stud Glide features IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 1" and 2" thick. Two base sizes to choose from (1-1/2" to 2"). Many sizes available with Top-A-Just® top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just® (-HX)



Top-A-Just® (-BR)



Features

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant
- Top hex options

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables

Steel	SS	Load	Thread	Hex	A	B	C
High Profile Steel and Stainless Steel Poly Base Fixed Stud Glides							
IL141-4Bx1/2	IL141-4BSx1/2	100	1/4-20	1/2	2	1/2	1-5/16
IL141-4Bx1	IL141-4BSx1	100	1/4-20	1/2	2	1	1-5/16
IL141-4B	IL141-4BS	100	1/4-20	1/2	2	1-9/16	1-5/16
IL141-4Bx2-HX	IL141-4BSx2-HX	100	1/4-20	1/2	2	2	1-5/16
IL141-4Bx2S	IL141-4BSx2S	100	1/4-20	1/2	2	2-1/2	1-5/16
IL141-5Bx3/4	IL141-5BSx3/4	500	5/16-18	1/2	2	3/4	1-5/16
IL141-5Bx15-HX	IL141-5BSx15-HX	500	5/16-18	1/2	2	1-1/2	1-5/16
IL141-5B	IL141-5BS	500	5/16-18	1/2	2	1-9/16	1-5/16
IL141-5Bx25-HX	IL141-5BSx25-HX	500	5/16-18	1/2	2	2-1/2	1-5/16
IL141-5Bx3	IL141-5BSx3	500	5/16-18	1/2	2	3	1-5/16
IL141-5Bx4	IL141-5BSx4	500	5/16-18	1/2	2	4	1-5/16
IL141-6Bx3/4	IL141-6BSx3/4	1000	3/8-16	1/2	2	3/4	1-5/16
IL141-6Bx15-HX	IL141-6BSx15-HX	1000	3/8-16	1/2	2	1-1/2	1-5/16
IL141-6B	IL141-6BS	1000	3/8-16	1/2	2	1-9/16	1-5/16
IL141-6Bx1	IL141-6BSx1	1000	3/8-16	1/2	2	1	1-5/16
IL141-6Bx2	IL141-6BSx2	1000	3/8-16	1/2	2	2	1-5/16
IL141-6Bx2-HX	IL141-6BSx2-HX	1000	3/8-16	1/2	2	2	1-5/16
IL141-6Bx3	IL141-6BSx3	1000	3/8-16	1/2	2	3	1-5/16
IL141-6Bx3-HX	IL141-6BSx3-HX	1000	3/8-16	1/2	2	3	1-5/16
IL141-6Bx4	IL141-6BSx4	1000	3/8-16	1/2	2	4	1-5/16
IL141-6Bx45-HX	IL141-6BSx45-HX	1000	3/8-16	1/2	2	4-1/2	1-5/16
IL141-6Bx6-HX	IL141-6BSx6-HX	1000	3/8-16	1/2	2	6	1-5/16
IL141-6FBx1	IL141-6FBSx1	1000	3/8-24	1/2	2	1	1-5/16
IL141-6FBx2	IL141-6FBSx2	1000	3/8-24	1/2	2	2	1-5/16
IL141-7B	IL141-7BS	2000	1/2-13	1/2	2	1-9/16	1-5/16
IL141-7Bx2	IL141-7BSx2	2000	1/2-13	1/2	2	2	1-5/16
IL141-7Bx2-HX	IL141-7BSx2-HX	2000	1/2-13	1/2	2	2	1-5/16
IL141-7Bx25-HX	IL141-7BSx25-HX	2000	1/2-13	1/2	2	2-1/2	1-5/16
IL141-7Bx3	IL141-7BSx3	2000	1/2-13	1/2	2	3	1-5/16
IL141-7Bx3-HX	IL141-7BSx3-HX	2000	1/2-13	1/2	2	3	1-5/16
IL141-7Bx35-HX	IL141-7BSx35-HX	2000	1/2-13	1/2	2	3-1/2	1-5/16
IL141-7Bx4	IL141-7BSx4	2000	1/2-13	1/2	2	4	1-5/16
IL141-7Bx4-HX	IL141-7BSx4-HX	2000	1/2-13	1/2	2	4	1-5/16
IL141-7Bx5	IL141-7BSx5	2000	1/2-13	1/2	2	5	1-5/16
IL141-7Bx5-HX	IL141-7BSx5-HX	2000	1/2-13	1/2	2	5	1-5/16
IL141-7Bx6-HX	IL141-7BSx6-HX	1500	1/2-13	1/2	2	6	1-5/16
IL141-7Bx8-HX	IL141-7BSx8-HX	1000	1/2-13	1/2	2	8	1-5/16
IL141-7FBx1	IL141-7FBSx1	2000	1/2-20	1/2	2	1	1-5/16
IL141-7FBx2	IL141-7FBSx2	2000	1/2-20	1/2	2	2	1-5/16
IL141-7FBx4	IL141-7FBSx4	2000	1/2-20	1/2	2	4	1-5/16
IL141-8B	IL141-8BS	2500	5/8-11	5/8	2	1-9/16	1-5/16
IL141-8Bx3	IL141-8BSx3	2500	5/8-11	5/8	2	3	1-5/16
IL141-8Bx4	IL141-8BSx4	2500	5/8-11	5/8	2	4	1-5/16
IL141-8Bx5	IL141-8BSx5	2500	5/8-11	5/8	2	5	1-5/16
IL141-9B	IL141-9BS	3000	3/4-10	3/4	2	1-9/16	1-5/16
IL141-9Bx3	IL141-9BSx3	3000	3/4-10	3/4	2	3	1-5/16
IL141-9Bx4	IL141-9BSx4	3000	3/4-10	3/4	2	4	1-5/16

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**DOUBLE HI-PRO® POLY FIXED STUD**

1-1/2" BASE DIAMETER - 2" TALL

DOUBLE HIGH PROFILE POLY BASE FIXED STUD GLIDES

The IEC Double High Profile Steel and Stainless Steel Poly Base Fixed Stud Glide features IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 1" and 2" thick. Two base sizes to choose from (1-1/2" to 2"). Many sizes available with Top-A-Just® top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just® (-HX)




Top-A-Just® (-BR)

Features

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant
- Top hex options

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables



Steel	SS	Load	Thread	Hex	A	B	C
Double High Profile Steel and Stainless Steel Poly Base Fixed Stud Glides							
IL140-DHP-4Bx1/2	IL140-DHP-4BSx1/2	100	1/4-20	1/2	1-1/2	1/2	2-5/16
IL140-DHP-4Bx1	IL140-DHP-4BSx1	100	1/4-20	1/2	1-1/2	1	2-5/16
IL140-DHP-4B	IL140-DHP-4BS	100	1/4-20	1/2	1-1/2	1-9/16	2-5/16
IL140-DHP-4Bx2-HX	IL140-DHP-4BSx2-HX	100	1/4-20	1/2	1-1/2	2	2-5/16
IL140-DHP-4Bx2S	IL140-DHP-4BSx2S	100	1/4-20	1/2	1-1/2	2-1/2	2-5/16
IL140-DHP-5Bx3/4	IL140-DHP-5BSx3/4	500	5/16-18	1/2	1-1/2	3/4	2-5/16
IL140-DHP-5Bx15-HX	IL140-DHP-5BSx15-HX	500	5/16-18	1/2	1-1/2	1-1/2	2-5/16
IL140-DHP-5B	IL140-DHP-5BS	500	5/16-18	1/2	1-1/2	1-9/16	2-5/16
IL140-DHP-5Bx25-HX	IL140-DHP-5BSx25-HX	500	5/16-18	1/2	1-1/2	2-1/2	2-5/16
IL140-DHP-5Bx3	IL140-DHP-5BSx3	500	5/16-18	1/2	1-1/2	3	2-5/16
IL140-DHP-5Bx4	IL140-DHP-5BSx4	500	5/16-18	1/2	1-1/2	4	2-5/16
IL140-DHP-6Bx3/4	IL140-DHP-6BSx3/4	1000	3/8-16	1/2	1-1/2	3/4	2-5/16
IL140-DHP-6Bx15-HX	IL140-DHP-6BSx15-HX	1000	3/8-16	1/2	1-1/2	1-1/2	2-5/16
IL140-DHP-6B	IL140-DHP-6BS	1000	3/8-16	1/2	1-1/2	1-9/16	2-5/16
IL140-DHP-6Bx1	IL140-DHP-6BSx1	1000	3/8-16	1/2	1-1/2	1	2-5/16
IL140-DHP-6Bx2	IL140-DHP-6BSx2	1000	3/8-16	1/2	1-1/2	2	2-5/16
IL140-DHP-6Bx2-HX	IL140-DHP-6BSx2-HX	1000	3/8-16	1/2	1-1/2	2	2-5/16
IL140-DHP-6Bx3	IL140-DHP-6BSx3	1000	3/8-16	1/2	1-1/2	3	2-5/16
IL140-DHP-6Bx3-HX	IL140-DHP-6BSx3-HX	1000	3/8-16	1/2	1-1/2	3	2-5/16
IL140-DHP-6Bx4	IL140-DHP-6BSx4	1000	3/8-16	1/2	1-1/2	4	2-5/16
IL140-DHP-6Bx45-HX	IL140-DHP-6BSx45-HX	1000	3/8-16	1/2	1-1/2	4-1/2	2-5/16
IL140-DHP-6Bx6-HX	IL140-DHP-6BSx6-HX	1000	3/8-16	1/2	1-1/2	6	2-5/16
IL140-DHP-6FBx1	IL140-DHP-6FBSx1	1000	3/8-24	1/2	1-1/2	1	2-5/16
IL140-DHP-6FBx2	IL140-DHP-6FBSx2	1000	3/8-24	1/2	1-1/2	2	2-5/16
IL140-DHP-7B	IL140-DHP-7BS	2000	1/2-13	1/2	1-1/2	1-9/16	2-5/16
IL140-DHP-7Bx2	IL140-DHP-7BSx2	2000	1/2-13	1/2	1-1/2	2	2-5/16
IL140-DHP-7Bx2-HX	IL140-DHP-7BSx2-HX	2000	1/2-13	1/2	1-1/2	2	2-5/16
IL140-DHP-7Bx25-HX	IL140-DHP-7BSx25-HX	2000	1/2-13	1/2	1-1/2	2-1/2	2-5/16
IL140-DHP-7Bx3	IL140-DHP-7BSx3	2000	1/2-13	1/2	1-1/2	3	2-5/16
IL140-DHP-7Bx3-HX	IL140-DHP-7BSx3-HX	2000	1/2-13	1/2	1-1/2	3	2-5/16
IL140-DHP-7Bx35-HX	IL140-DHP-7BSx35-HX	2000	1/2-13	1/2	1-1/2	3-1/2	2-5/16
IL140-DHP-7Bx4	IL140-DHP-7BSx4	2000	1/2-13	1/2	1-1/2	4	2-5/16
IL140-DHP-7Bx4-HX	IL140-DHP-7BSx4-HX	2000	1/2-13	1/2	1-1/2	4	2-5/16
IL140-DHP-7Bx5	IL140-DHP-7BSx5	2000	1/2-13	1/2	1-1/2	5	2-5/16
IL140-DHP-7Bx5-HX	IL140-DHP-7BSx5-HX	2000	1/2-13	1/2	1-1/2	5	2-5/16
IL140-DHP-7Bx6-HX	IL140-DHP-7BSx6-HX	1500	1/2-13	1/2	1-1/2	6	2-5/16
IL140-DHP-7Bx8-HX	IL140-DHP-7BSx8-HX	1000	1/2-13	1/2	1-1/2	8	2-5/16
IL140-DHP-7FBx1	IL140-DHP-7FBSx1	2000	1/2-20	1/2	1-1/2	1	2-5/16
IL140-DHP-7FBx2	IL140-DHP-7FBSx2	2000	1/2-20	1/2	1-1/2	2	2-5/16
IL140-DHP-7FBx4	IL140-DHP-7FBSx4	2000	1/2-20	1/2	1-1/2	4	2-5/16
IL140-DHP-8B	IL140-DHP-8BS	2500	5/8-11	5/8	1-1/2	1-9/16	2-5/16
IL140-DHP-8Bx3	IL140-DHP-8BSx3	2500	5/8-11	5/8	1-1/2	3	2-5/16
IL140-DHP-8Bx4	IL140-DHP-8BSx4	2500	5/8-11	5/8	1-1/2	4	2-5/16
IL140-DHP-8Bx5	IL140-DHP-8BSx5	2500	5/8-11	5/8	1-1/2	5	2-5/16
IL140-DHP-9B	IL140-DHP-9BS	3000	3/4-10	3/4	1-1/2	1-9/16	2-5/16
IL140-DHP-9Bx3	IL140-DHP-9BSx3	3000	3/4-10	3/4	1-1/2	3	2-5/16
IL140-DHP-9Bx4	IL140-DHP-9BSx4	3000	3/4-10	3/4	1-1/2	4	2-5/16

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**DOUBLE HI-PRO® POLY FIXED STUD****2" BASE DIAMETER - 2" TALL****DOUBLE HIGH PROFILE POLY BASE FIXED STUD GLIDES**

The IEC Double High Profile Steel and Stainless Steel Poly Base Fixed Stud Glide features IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 1" and 2" thick. Two base sizes to choose from (1-1/2" to 2"). Many sizes available with Top-A-Just® top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just® (-HX)




Top-A-Just® (-BR)

Features

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant
- Top hex options

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables



Steel	SS	Load	Thread	Hex	A	B	C
Double High Profile Steel and Stainless Steel Poly Base Fixed Stud Glides							
IL141-DHP-4Bx1/2	IL141-DHP-4BSx1/2	100	1/4-20	1/2	2	1/2	2-5/16
IL141-DHP-4Bx1	IL141-DHP-4BSx1	100	1/4-20	1/2	2	1	2-5/16
IL141-DHP-4B	IL141-DHP-4BS	100	1/4-20	1/2	2	1-9/16	2-5/16
IL141-DHP-4Bx2-HX	IL141-DHP-4BSx2-HX	100	1/4-20	1/2	2	2	2-5/16
IL141-DHP-4Bx25	IL141-DHP-4BSx25	100	1/4-20	1/2	2	2-1/2	2-5/16
IL141-DHP-5Bx3/4	IL141-DHP-5BSx3/4	500	5/16-18	1/2	2	3/4	2-5/16
IL141-DHP-5Bx15-HX	IL141-DHP-5BSx15-HX	500	5/16-18	1/2	2	1-1/2	2-5/16
IL141-DHP-5B	IL141-DHP-5BS	500	5/16-18	1/2	2	1-9/16	2-5/16
IL141-DHP-5Bx25-HX	IL141-DHP-5BSx25-HX	500	5/16-18	1/2	2	2-1/2	2-5/16
IL141-DHP-5Bx3	IL141-DHP-5BSx3	500	5/16-18	1/2	2	3	2-5/16
IL141-DHP-5Bx4	IL141-DHP-5BSx4	500	5/16-18	1/2	2	4	2-5/16
IL141-DHP-6Bx3/4	IL141-DHP-6BSx3/4	1000	3/8-16	1/2	2	3/4	2-5/16
IL141-DHP-6Bx15-HX	IL141-DHP-6BSx15-HX	1000	3/8-16	1/2	2	1-1/2	2-5/16
IL141-DHP-6B	IL141-DHP-6BS	1000	3/8-16	1/2	2	1-9/16	2-5/16
IL141-DHP-6Bx1	IL141-DHP-6BSx1	1000	3/8-16	1/2	2	1	2-5/16
IL141-DHP-6Bx2	IL141-DHP-6BSx2	1000	3/8-16	1/2	2	2	2-5/16
IL141-DHP-6Bx2-HX	IL141-DHP-6BSx2-HX	1000	3/8-16	1/2	2	2	2-5/16
IL141-DHP-6Bx3	IL141-DHP-6BSx3	1000	3/8-16	1/2	2	3	2-5/16
IL141-DHP-6Bx3-HX	IL141-DHP-6BSx3-HX	1000	3/8-16	1/2	2	3	2-5/16
IL141-DHP-6Bx4	IL141-DHP-6BSx4	1000	3/8-16	1/2	2	4	2-5/16
IL141-DHP-6Bx45-HX	IL141-DHP-6BSx45-HX	1000	3/8-16	1/2	2	4-1/2	2-5/16
IL141-DHP-6Bx6-HX	IL141-DHP-6BSx6-HX	1000	3/8-16	1/2	2	6	2-5/16
IL141-DHP-6FBx1	IL141-DHP-6FBSx1	1000	3/8-24	1/2	2	1	2-5/16
IL141-DHP-6FBx2	IL141-DHP-6FBSx2	1000	3/8-24	1/2	2	2	2-5/16
IL141-DHP-7B	IL141-DHP-7BS	2000	1/2-13	1/2	2	1-9/16	2-5/16
IL141-DHP-7Bx2	IL141-DHP-7BSx2	2000	1/2-13	1/2	2	2	2-5/16
IL141-DHP-7Bx2-HX	IL141-DHP-7BSx2-HX	2000	1/2-13	1/2	2	2	2-5/16
IL141-DHP-7Bx25-HX	IL141-DHP-7BSx25-HX	2000	1/2-13	1/2	2	2-1/2	2-5/16
IL141-DHP-7Bx3	IL141-DHP-7BSx3	2000	1/2-13	1/2	2	3	2-5/16
IL141-DHP-7Bx3-HX	IL141-DHP-7BSx3-HX	2000	1/2-13	1/2	2	3	2-5/16
IL141-DHP-7Bx35-HX	IL141-DHP-7BSx35-HX	2000	1/2-13	1/2	2	3-1/2	2-5/16
IL141-DHP-7Bx4	IL141-DHP-7BSx4	2000	1/2-13	1/2	2	4	2-5/16
IL141-DHP-7Bx4-HX	IL141-DHP-7BSx4-HX	2000	1/2-13	1/2	2	4	2-5/16
IL141-DHP-7Bx5	IL141-DHP-7BSx5	2000	1/2-13	1/2	2	5	2-5/16
IL141-DHP-7Bx5-HX	IL141-DHP-7BSx5-HX	2000	1/2-13	1/2	2	5	2-5/16
IL141-DHP-7Bx6-HX	IL141-DHP-7BSx6-HX	1500	1/2-13	1/2	2	6	2-5/16
IL141-DHP-7Bx8-HX	IL141-DHP-7BSx8-HX	1000	1/2-13	1/2	2	8	2-5/16
IL141-DHP-7FBx1	IL141-DHP-7FBSx1	2000	1/2-20	1/2	2	1	2-5/16
IL141-DHP-7FBx2	IL141-DHP-7FBSx2	2000	1/2-20	1/2	2	2	2-5/16
IL141-DHP-7FBx4	IL141-DHP-7FBSx4	2000	1/2-20	1/2	2	4	2-5/16
IL141-DHP-8B	IL141-DHP-8BS	2500	5/8-11	5/8	2	1-9/16	2-5/16
IL141-DHP-8Bx3	IL141-DHP-8BSx3	2500	5/8-11	5/8	2	3	2-5/16
IL141-DHP-8Bx4	IL141-DHP-8BSx4	2500	5/8-11	5/8	2	4	2-5/16
IL141-DHP-8Bx5	IL141-DHP-8BSx5	2500	5/8-11	5/8	2	5	2-5/16
IL141-DHP-9B	IL141-DHP-9BS	3000	3/4-10	3/4	2	1-9/16	2-5/16
IL141-DHP-9Bx3	IL141-DHP-9BSx3	3000	3/4-10	3/4	2	3	2-5/16
IL141-DHP-9Bx4	IL141-DHP-9BSx4	3000	3/4-10	3/4	2	4	2-5/16

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS**HI-PRO® & DOUBLE HI-PRO® POLY FIXED STUD****1-1/2" & 2" BASE DIAMETER****HI-PRO® & DOUBLE HIGH PROFILE METRIC POLY BASE
FIXED STUD GLIDES**

The IEC High Profile & Double High Profile Metric Steel and Stainless Steel Poly Base Fixed Stud Glide feature metric threads and IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 1" and 2" thick. Two base sizes to choose from (1-1/2" to 2"). Many sizes available with Top-A-Just® top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just® (-HX)




Top-A-Just® (-BR)

Features

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless steels
- Corrosion resistant
- RoHS compliant
- Top hex options

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables

**METRIC HI-PRO® POLY FIXED STUD LEVELERS**

Steel	SS	Load	Thread	Hex	A	B(mm)	C
High Profile Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL140-M6Bx25	IL140-M6BSx25	100	M6	1/2	1-1/2	25	1-5/16
IL140-M6Bx38	IL140-M6BSx38	100	M6	1/2	1-1/2	38	1-5/16
IL140-M6Bx51	IL140-M6BSx51	100	M6	1/2	1-1/2	51	1-5/16
IL140-M8Bx38	IL140-M8BSx38	500	M8	1/2	1-1/2	38	1-5/16
IL140-M8Bx51	IL140-M8BSx51	500	M8	1/2	1-1/2	51	1-5/16
IL140-M8Bx62	IL140-M8BSx62	500	M8	1/2	1-1/2	62	1-5/16
IL140-M10Bx38	IL140-M10BSx38	1000	M10	1/2	1-1/2	38	1-5/16
IL140-M10Bx51	IL140-M10BSx51	1000	M10	1/2	1-1/2	51	1-5/16
IL140-M10Bx62	IL140-M10BSx62	1000	M10	1/2	1-1/2	62	1-5/16
IL140-M12Bx38	IL140-M12BSx38	2000	M12	1/2	1-1/2	38	1-5/16
IL140-M12Bx51	IL140-M12BSx51	2000	M12	1/2	1-1/2	51	1-5/16
IL140-M12Bx75	IL140-M12BSx75	2000	M12	1/2	1-1/2	75	1-5/16
IL140-M12Bx102	IL140-M12BSx102	2000	M12	1/2	1-1/2	102	1-5/16
IL140-M16Bx51	IL140-M16BSx51	2500	M16	5/8	1-1/2	51	1-5/16
IL140-M16Bx90-BR	IL140-M16BSx90-BR	2500	M16	5/8	1-1/2	90	1-5/16
IL140-M16Bx102	IL140-M16BSx102	2500	M16	5/8	1-1/2	102	1-5/16
IL140-M16Bx115-BR	IL140-M16BSx115-BR	2500	M16	5/8	1-1/2	115	1-5/16

METRIC (Double High Profile) POLY FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Double High Profile Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL140-DHP-M6Bx25	IL140-DHP-M6BSx25	100	M6	1/2	1-1/2	25	2-5/16
IL140-DHP-M6Bx38	IL140-DHP-M6BSx38	100	M6	1/2	1-1/2	38	2-5/16
IL140-DHP-M6Bx51	IL140-DHP-M6BSx51	100	M6	1/2	1-1/2	51	2-5/16
IL140-DHP-M8Bx38	IL140-DHP-M8BSx38	500	M8	1/2	1-1/2	38	2-5/16
IL140-DHP-M8Bx51	IL140-DHP-M8BSx51	500	M8	1/2	1-1/2	51	2-5/16
IL140-DHP-M8Bx62	IL140-DHP-M8BSx62	500	M8	1/2	1-1/2	62	2-5/16
IL140-DHP-M10Bx38	IL140-DHP-M10BSx38	1000	M10	1/2	1-1/2	38	2-5/16
IL140-DHP-M10Bx51	IL140-DHP-M10BSx51	1000	M10	1/2	1-1/2	51	2-5/16
IL140-DHP-M10Bx62	IL140-DHP-M10BSx62	1000	M10	1/2	1-1/2	62	2-5/16
IL140-DHP-M12Bx38	IL140-DHP-M12BSx38	2000	M12	1/2	1-1/2	38	2-5/16
IL140-DHP-M12Bx51	IL140-DHP-M12BSx51	2000	M12	1/2	1-1/2	51	2-5/16
IL140-DHP-M12Bx75	IL140-DHP-M12BSx75	2000	M12	1/2	1-1/2	75	2-5/16
IL140-DHP-M12Bx102	IL140-DHP-M12BSx102	2000	M12	1/2	1-1/2	102	2-5/16
IL140-DHP-M16Bx51	IL140-DHP-M16BSx51	2500	M16	5/8	1-1/2	51	2-5/16
IL140-DHP-M16Bx90-BR	IL140-DHP-M16BSx90-BR	2500	M16	5/8	1-1/2	90	2-5/16
IL140-DHP-M16Bx102	IL140-DHP-M16BSx102	2500	M16	5/8	1-1/2	102	2-5/16
IL140-DHP-M16Bx115-BRIL	IL140-DHP-M16BSx115-BR	2500	M16	5/8	1-1/2	115	2-5/16

METRIC HI-PRO® POLY FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
High Profile Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL141-M6Bx25	IL141-M6BSx25	100	M6	1/2	2	25	1-5/16
IL141-M6Bx38	IL141-M6BSx38	100	M6	1/2	2	38	1-5/16
IL141-M6Bx51	IL141-M6BSx51	100	M6	1/2	2	51	1-5/16
IL141-M8Bx38	IL141-M8BSx38	500	M8	1/2	2	38	1-5/16
IL141-M8Bx51	IL141-M8BSx51	500	M8	1/2	2	51	1-5/16
IL141-M8Bx62	IL141-M8BSx62	500	M8	1/2	2	62	1-5/16
IL141-M10Bx38	IL141-M10BSx38S	1000	M10	1/2	2	38	1-5/16
IL141-M10Bx51	IL141-M10BSx51S	1000	M10	1/2	2	51	1-5/16
IL141-M10Bx62	IL141-M10BSx62S	1000	M10	1/2	2	62	1-5/16
IL141-M12Bx38	IL141-M12BSx38	2000	M12	1/2	2	38	1-5/16
IL141-M12Bx51	IL141-M12BSx51	2000	M12	1/2	2	51	1-5/16
IL141-M12Bx75	IL141-M12BSx75	2000	M12	1/2	2	75	1-5/16
IL141-M12Bx102	IL141-M12BSx102	2000	M12	1/2	2	102	1-5/16
IL141-M16Bx51	IL141-M16BSx51	2500	M16	5/8	2	51	1-5/16
IL141-M16Bx90-BR	IL141-M16BSx90-BR	2500	M16	5/8	2	90	1-5/16
IL141-M16Bx102	IL141-M16BSx102	2500	M16	5/8	2	102	1-5/16
IL141-M16Bx115-BR	IL141-M16BSx115-BR	2500	M16	5/8	2	115	1-5/16

METRIC (Double High Profile) POLY FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Double High Profile Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL141-DHP-M6Bx25	IL141-DHP-M6BSx25	100	M6	1/2	2	25	2-5/16
IL141-DHP-M6Bx38	IL141-DHP-M6BSx38	100	M6	1/2	2	38	2-5/16
IL141-DHP-M6Bx51	IL141-DHP-M6BSx51	100	M6	1/2	2	51	2-5/16
IL141-DHP-M8Bx38	IL141-DHP-M8BSx38	500	M8	1/2	2	38	2-5/16
IL141-DHP-M8Bx51	IL141-DHP-M8BSx51	500	M8	1/2	2	51	2-5/16
IL141-DHP-M8Bx62	IL141-DHP-M8BSx62	500	M8	1/2	2	62	2-5/16
IL141-DHP-M10Bx38	IL141-DHP-M10BSx38S	1000	M10	1/2	2	38	2-5/16
IL141-DHP-M10Bx51	IL141-DHP-M10BSx51S	1000	M10	1/2	2	51	2-5/16
IL141-DHP-M10Bx62	IL141-DHP-M10BSx62S	1000	M10	1/2	2	62	2-5/16
IL141-DHP-M12Bx38	IL141-DHP-M12BSx38	2000	M12	1/2	2	38	2-5/16
IL141-DHP-M12Bx51	IL141-DHP-M12BSx51	2000	M12	1/2	2	51	2-5/16
IL141-DHP-M12Bx75	IL141-DHP-M12BSx75	2000	M12	1/2	2	75	2-5/16
IL141-DHP-M12Bx102	IL141-DHP-M12BSx102	2000	M12	1/2	2	102	2-5/16
IL141-DHP-M16Bx51	IL141-DHP-M16BSx51	2500	M16	5/8	2	51	2-5/16
IL141-DHP-M16Bx90-BR	IL141-DHP-M16BSx90-BR	2500	M16	5/8	2	90	2-5/16
IL141-DHP-M16Bx102	IL141-DHP-M16BSx102	2500	M16	5/8	2	102	2-5/16
IL141-DHP-M16Bx115-BR	IL141-DHP-M16BSx115-BR	2500	M16	5/8	2	115	2-5/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com


MEDIUM-DUTY LEVELERS

HI-PRO® & DOUBLE HI-PRO® POLY FIXED SOCKET

1-1/2" to 2" BASE DIAMETER

HI-PRO® & DOUBLE HI-PROFILE POLY BASE FIXED SOCKET GLIDES

The IEC High Profile & Double High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides features IEC's Ridge-Grip® design ideal for light and medium-duty load requirements. The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc. The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel socket and black polypropylene base, 1" and 2" thick. Two base diameters to choose from (1-1/2" to 2").



Features

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables

Steel	SS	Load	Thread	Hex	A	B	C	F
High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL140-4B-T	IL140-4BS-T	100	1/4-20	1/2	1-1/2	1/4	1-5/16	1/4
IL140-5B-T	IL140-5BS-T	500	5/16-18	1/2	1-1/2	3/8	1-7/16	1/4
IL140-6B-T	IL140-6BS-T	1000	3/8-16	1/2	1-1/2	1/2	1-9/16	3/8
IL140-7B-T	IL140-7BS-T	2000	1/2-13	1/2	1-1/2	1/2	1-9/16	3/8
IL140-8B-T	IL140-8BS-T	2500	5/8-11	5/8	1-1/2	5/8	1-11/16	1/2
IL140-9B-T	IL140-9BS-T	3000	3/4-10	3/4	1-1/2	3/4	1-13/16	5/8

Steel	SS	Load	Thread	Hex	A	B	C	F
Double High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL140-DHP-4B-T	IL140-DHP-4BS-T	100	1/4-20	1/2	1-1/2	1/4	2-5/16	1/4
IL140-DHP-5B-T	IL140-DHP-5BS-T	500	5/16-18	1/2	1-1/2	3/8	2-7/16	1/4
IL140-DHP-6B-T	IL140-DHP-6BS-T	1000	3/8-16	1/2	1-1/2	1/2	2-9/16	3/8
IL140-DHP-7B-T	IL140-DHP-7BS-T	2000	1/2-13	1/2	1-1/2	1/2	2-9/16	3/8
IL140-DHP-8B-T	IL140-DHP-8BS-T	2500	5/8-11	5/8	1-1/2	5/8	2-11/16	1/2
IL140-DHP-9B-T	IL140-DHP-9BS-T	3000	3/4-10	3/4	1-1/2	3/4	2-13/16	5/8

Steel	SS	Load	Thread	Hex	A	B	C	F
High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL141-4B-T	IL141-4BS-T	100	1/4-20	1/2	2	1/4	1-5/16	1/4
IL141-5B-T	IL141-5BS-T	500	5/16-18	1/2	2	3/8	1-7/16	1/4
IL141-6B-T	IL141-6BS-T	1000	3/8-16	1/2	2	1/2	1-9/16	3/8
IL141-7B-T	IL141-7BS-T	2000	1/2-13	1/2	2	1/2	1-9/16	3/8
IL141-8B-T	IL141-8BS-T	2500	5/8-11	5/8	2	5/8	1-11/16	1/2
IL141-9B-T	IL141-9BS-T	3000	3/4-10	3/4	2	3/4	1-13/16	5/8

Steel	SS	Load	Thread	Hex	A	B	C	F
Double High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL141-DHP-4B-T	IL141-DHP-4BS-T	100	1/4-20	1/2	2	1/4	2-5/16	1/4
IL141-DHP-5B-T	IL141-DHP-5BS-T	500	5/16-18	1/2	2	3/8	2-7/16	1/4
IL141-DHP-6B-T	IL141-DHP-6BS-T	1000	3/8-16	1/2	2	1/2	2-9/16	3/8
IL141-DHP-7B-T	IL141-DHP-7BS-T	2000	1/2-13	1/2	2	1/2	2-9/16	3/8
IL141-DHP-8B-T	IL141-DHP-8BS-T	2500	5/8-11	5/8	2	5/8	2-11/16	1/2
IL141-DHP-9B-T	IL141-DHP-9BS-T	3000	3/4-10	3/4	2	3/4	2-13/16	5/8


**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**HI-PRO® & DOUBLE HIGH PROFILE POLY BASE
FIXED SOCKET METRIC GLIDES**

The IEC *Hi-Profile & Double High Profile Steel and Stainless Steel Poly Base Fixed Socket Metric Glide* features metric threads and IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel socket and black polypropylene base, 1" and 2" thick. Two base sizes to choose from (1-1/2" to 2").

**MEDIUM-DUTY LEVELERS**

HI-PRO® & DOUBLE HI-PRO®

POLY FIXED SOCKET-METRIC GLIDES

1-1/2" to 2" BASE DIAMETER

**Features**

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables

Steel	SS	Load	Thread	Hex	A	B	C	F
High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL140-M6B-T	IL140-M6BS-T	100	M6x1.0	1/2	1-1/2	1/4	1-5/16	1/4
IL140-M8B-T	IL140-M8BS-T	500	M8x1.25	1/2	1-1/2	3/8	1-7/16	1/4
IL140-M10B-T	IL140-M10BS-T	1000	M10x1.5	1/2	1-1/2	1/2	1-9/16	3/8
IL140-M12B-T	IL140-M12BS-T	2000	M12x1.75	1/2	1-1/2	1/2	1-9/16	3/8
IL140-M16B-T	IL140-M16BS-T	2500	M16x2.0	5/8	1-1/2	5/8	1-11/16	1/2
IL140-M20B-T	IL140-M20BS-T	3000	M20x2.5	3/4	1-1/2	3/4	1-13/16	5/8

Steel	SS	Load	Thread	Hex	A	B	C	F
Double High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL140-DHP-M6B-T	IL140-DHP-M6BS-T	100	M6x1.0	1/2	1-1/2	1/4	2-5/16	1/4
IL140-DHP-M8B-T	IL140-DHP-M8BS-T	500	M8x1.25	1/2	1-1/2	3/8	2-7/16	1/4
IL140-DHP-M10B-T	IL140-DHP-M10BS-T	1000	M10x1.5	1/2	1-1/2	1/2	2-9/16	3/8
IL140-DHP-M12B-T	IL140-DHP-M12BS-T	2000	M12x1.75	1/2	1-1/2	1/2	2-9/16	3/8
IL140-DHP-M16B-T	IL140-DHP-M16BS-T	2500	M16x2.0	5/8	1-1/2	5/8	2-11/16	1/2
IL140-DHP-M20B-T	IL140-DHP-M20BS-T	3000	M20x2.5	3/4	1-1/2	3/4	2-13/16	5/8

Steel	SS	Load	Thread	Hex	A	B	C	F
High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								1/4
IL141-M6B-T	IL141-M6BS-T	100	M6x1.0	1/2	2	1/4	1-5/16	1/4
IL141-M8B-T	IL141-M8BS-T	500	M8x1.25	1/2	2	3/8	1-7/16	3/8
IL141-M10B-T	IL141-M10BS-T	1000	M10x1.5	1/2	2	1/2	1-9/16	3/8
IL141-M12B-T	IL141-M12BS-T	2000	M12x1.75	1/2	2	1/2	1-9/16	1/2
IL141-M16B-T	IL141-M16BS-T	2500	M16x2.0	5/8	2	5/8	1-11/16	5/8
IL141-M20B-T	IL141-M20BS-T	3000	M20x2.5	3/4	2	3/4	1-13/16	

Steel	SS	Load	Thread	Hex	A	B	C	F
Double High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL141-DHP-M6B-T	IL141-DHP-M6BS-T	100	M6x1.0	1/2	2	1/4	2-5/16	1/4
IL141-DHP-M8B-T	IL141-DHP-M8BS-T	500	M8x1.25	1/2	2	3/8	2-7/16	1/4
IL141-DHP-M10B-T	IL141-DHP-M10BS-T	1000	M10x1.5	1/2	2	1/2	2-9/16	3/8
IL141-DHP-M12B-T	IL141-DHP-M12BS-T	2000	M12x1.75	1/2	2	1/2	2-9/16	3/8
IL141-DHP-M16B-T	IL141-DHP-M16BS-T	2500	M16x2.0	5/8	2	5/8	2-11/16	1/2
IL141-DHP-M20B-T	IL141-DHP-M20BS-T	3000	M20x2.5	3/4	2	3/4	2-13/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com



MEDIUM-DUTY LEVELERS

HI-PRO® KNOB STYLE SOCKET

1-1/2" to 2" BASE DIAMETER

HI-PRO® KNOB STYLE THRU-HOLE SOCKET GLIDES

The IEC High Profile Steel and Stainless Steel Knob Style Socket Glide with molded-in threaded nut and thru-hole features IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc. Zinc plated steel internal thread and black poly-propylene base, 1" thick. Two base sizes to choose from (1-1/2" to 2"). A 3/8-16 or 1/2-13 threaded screw or bolt can be installed from either the top or bottom of the socket glide.

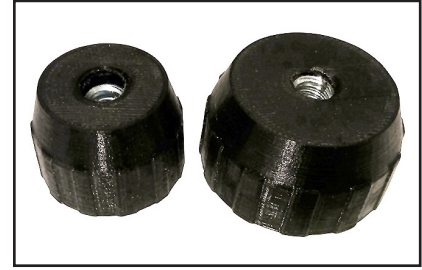

Features

- High-profile base
- Ridge-Grip® base design
- Loads to 2000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables





Socket Glide Bottom

Note: Distance from bottom of center hole to bottom of base = 5/16"

HI-PRO® & DOUBLE HIGH PROFILE KNOB STYLE THRU-HOLE NON-THREADED GLIDES

The IEC High Profile Knob Style Socket Glide with a thru-hole to accept your own wood screw, machine screw or rivet, etc. is ideal for light and medium-duty load requirements. The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.



Non-Threaded Bottom

Note: Distance from bottom of center hole to bottom of base = 5/16"

Steel	SS	Load	Thread	A	B	C
High Profile Steel and Stainless Steel Knob Style Thru-Hole Socket Glides						
IL140-6B-TH	IL140-6BS-TH	1000	3/8-16	1-1/2	1/2	1
IL140-7B-TH	IL140-7BS-TH	2000	1/2-13	1-1/2	1/2	1

Steel	SS	Load	Thread	A	B	C
High Profile Steel and Stainless Steel Knob Style Thru-Hole Socket Glides						
IL141-6B-TH	IL141-6BS-TH	1000	3/8-16	2	1/2	1
IL141-7B-TH	IL141-7BS-TH	2000	1/2-13	2	1/2	1

Note: These thru-hole, threaded socket glides are also available in a rubber base in addition to these plastic bases. See IEC's Vibe-Glide® vibration dampening catalog for options.

P/N	Load	Hole Size	A	B	C
High Profile Knob Style Thru-Hole Non-Threaded Socket Glides					
IL140-THNT	3000	11/32	1-1/2	11/16	1
IL141-THNT	3000	11/32	2	11/16	1


P/N	Load	Hole Size	A	B	C
Double High Profile Knob Style Thru-Hole Non-Threaded Socket Glides					
IL140-DHP-THNT	3000	11/32	1-1/2	11/16	2
IL141-DHP-THNT	3000	11/32	2	11/16	2

Note: These thru-hole, non-threaded socket glides are also available in a rubber base in addition to these plastic bases. See IEC's Vibe-Glide® vibration dampening catalog for options.




KNOB STYLE GLIDES

The IEC Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.



Many colors available as custom option.


 Top Hex (-HX)
and Slot (-SL)

36 - Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.



Steel	SS	Load	Thread	A	B	C
36-Steel and Stainless Steel Knob Style (PVC Base) Glides						
IL82-4Bx1/4-PVC	IL82-4BSx1/4-PVC	100	1/4-20	1-1/2	1/4	3/8
IL82-4Bx1/2-PVC	IL82-4BSx1/2-PVC	100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx1-PVC	IL82-4BSx1-PVC	100	1/4-20	1-1/2	1	3/8
IL82-4Bx125-PVC	IL82-4BSx125-PVC	100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx175-PVC	IL82-4BSx175-PVC	100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx2-PVC	IL82-4BSx2-PVC	100	1/4-20	1-1/2	2	3/8
IL82-4Bx275-PVC	IL82-4BSx275-PVC	100	1/4-20	1-1/2	2-3/4	3/8
IL82-5Bx1/2-PVC	IL82-5BSx1/2-PVC	100	5/16-18	1-1/2	1/2	3/8
IL82-5Bx1-PVC	IL82-5BSx1-PVC	100	5/16-18	1-1/2	1	3/8
IL82-5Bx125-PVC	IL82-5BSx125-PVC	100	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx175-PVC	IL82-5BSx175-PVC	100	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx225-HX-SL-PVC	IL82-5BSx225-HX-SL-PVC	100	5/16-18	1-1/2	2-1/4	3/8
IL82-6Bx1/2-PVC	IL82-6BSx1/2-PVC	100	3/8-16	1-1/2	1/2	3/8
IL82-6Bx1-PVC	IL82-6BSx1-PVC	100	3/8-16	1-1/2	1	3/8
IL82-6Bx125-PVC	IL82-6BSx125-PVC	100	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx175-PVC	IL82-6BSx175-PVC	100	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx238-PVC	IL82-6BSx238-PVC	100	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx275-HX-SL-PVC	IL82-6BSx275-HX-SL-PVC	100	3/8-16	1-1/2	2-3/4	3/8
IL82-6Bx338-HX-SL-PVC	IL82-6BSx338-HX-SL-PVC	100	3/8-16	1-1/2	3-3/8	3/8
IL84-4Bx1/4-PVC	IL84-4BSx1/4-PVC	100	1/4-20	2	1/4	3/8
IL84-4Bx1/2-PVC	IL84-4BSx1/2-PVC	100	1/4-20	2	1/2	3/8
IL84-4Bx1-PVC	IL84-4BSx1-PVC	100	1/4-20	2	1	3/8
IL84-4Bx125-PVC	IL84-4BSx125-PVC	100	1/4-20	2	1-1/4	3/8
IL84-4Bx175-PVC	IL84-4BSx175-PVC	100	1/4-20	2	1-3/4	3/8
IL84-4Bx2-PVC	IL84-4BSx2-PVC	100	1/4-20	2	2	3/8
IL84-4Bx275-PVC	IL84-4BSx275-PVC	100	1/4-20	2	2-3/4	3/8
IL84-5Bx1/2-PVC	IL84-5BSx1/2-PVC	100	5/16-18	2	1/2	3/8
IL84-5Bx1-PVC	IL84-5BSx1-PVC	100	5/16-18	2	1	3/8
IL84-5Bx125-PVC	IL84-5BSx125-PVC	100	5/16-18	2	1-1/4	3/8
IL84-5Bx175-PVC	IL84-5BSx175-PVC	100	5/16-18	2	1-3/4	3/8
IL84-5Bx225-HX-SL-PVC	IL84-5BSx225-HX-SL-PVC	100	5/16-18	2	2-1/4	3/8
IL84-6Bx1/2-PVC	IL84-6BSx1/2-PVC	100	3/8-16	2	1/2	3/8
IL84-6Bx1-PVC	IL84-6BSx1-PVC	100	3/8-16	2	1	3/8
IL84-6Bx125-PVC	IL84-6BSx125-PVC	100	3/8-16	2	1-1/4	3/8
IL84-6Bx175-PVC	IL84-6BSx175-PVC	100	3/8-16	2	1-3/4	3/8
IL84-6Bx238-PVC	IL84-6BSx238-PVC	100	3/8-16	2	2-3/8	3/8
IL84-6Bx275-HX-SL-PVC	IL84-6BSx275-HX-SL-PVC	100	3/8-16	2	2-3/4	3/8
IL84-6Bx338-HX-SL-PVC	IL84-6BSx338-HX-SL-PVC	100	3/8-16	2	3-3/8	3/8

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL82-4Bx1/4	IL82-4BSx1/4	100	1/4-20	1-1/2	1/4	3/8
IL82-4Bx1/2	IL82-4BSx1/2	100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx1/2-HX-SL		100	1/4-20	1-1/2	1/2	3/8
IL82-4Bx3/4	IL82-4BSx3/4	100	1/4-20	1-1/2	3/4	3/8
IL82-4Bx3/4-HX-SL		100	1/4-20	1-1/2	3/4	3/8
IL82-4Bx1	IL82-4BSx1	100	1/4-20	1-1/2	1	3/8
IL82-4Bx1-HX-SL		100	1/4-20	1-1/2	1	3/8
IL82-4Bx125	IL82-4BSx125	100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx125-HX-SL		100	1/4-20	1-1/2	1-1/4	3/8
IL82-4Bx150	IL82-4BSx150	100	1/4-20	1-1/2	1-1/2	3/8
IL82-4Bx175	IL82-4BSx175	100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx175-HX-SL		100	1/4-20	1-1/2	1-3/4	3/8
IL82-4Bx2	IL82-4BSx2	100	1/4-20	1-1/2	2	3/8
IL82-4Bx275	IL82-4BSx275	100	1/4-20	1-1/2	2-3/4	3/8
IL82-5Bx1/4	IL82-5BSx1/4	500	5/16-18	1-1/2	1/4	3/8
IL82-5Bx1/2	IL82-5BSx1/2	500	5/16-18	1-1/2	1/2	3/8
IL82-5Bx1/2-HX-SL		500	5/16-18	1-1/2	1/2	3/8
IL82-5Bx3/4	IL82-5BSx3/4	500	5/16-18	1-1/2	3/4	3/8
IL82-5Bx3/4-HX-SL		500	5/16-18	1-1/2	3/4	3/8
IL82-5Bx1	IL82-5BSx1	500	5/16-18	1-1/2	1	3/8
IL82-5Bx1-HX-SL		500	5/16-18	1-1/2	1	3/8
IL82-5Bx125-HX-SL		500	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx125	IL82-5BSx125	500	5/16-18	1-1/2	1-1/4	3/8
IL82-5Bx175	IL82-5BSx175	500	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx175-HX-SL		500	5/16-18	1-1/2	1-3/4	3/8
IL82-5Bx225-HX-SL		500	5/16-18	1-1/2	2-1/4	3/8
IL82-6Bx1/4	IL82-6BSx1/4	1000	3/8-16	1-1/2	1/4	3/8
IL82-6Bx1/2	IL82-6BSx1/2	1000	3/8-16	1-1/2	1/2	3/8
IL82-6Bx1/2-HX-SL		1000	3/8-16	1-1/2	1/2	3/8
IL82-6Bx3/4-HX-SL		1000	3/8-16	1-1/2	3/4	3/8
IL82-6Bx1	IL82-6BSx1	1000	3/8-16	1-1/2	1	3/8
IL82-6Bx1-HX-SL		1000	3/8-16	1-1/2	1	3/8
IL82-6Bx125	IL82-6BSx125	1000	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx125-HX-SL		1000	3/8-16	1-1/2	1-1/4	3/8
IL82-6Bx150	IL82-6BSx150	1000	3/8-16	1-1/2	1-1/2	3/8
IL82-6Bx175-HX-SL		1000	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx175	IL82-6BSx175	1000	3/8-16	1-1/2	1-3/4	3/8
IL82-6Bx238	IL82-6BSx238	1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx238-SL		1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx238-HX-SL		1000	3/8-16	1-1/2	2-3/8	3/8
IL82-6Bx275-HX-SL		1000	3/8-16	1-1/2	2-3/4	3/8
IL82-6Bx338-HX-SL		1000	3/8-16	1-1/2	3-3/8	3/8
IL82-7Bx3/4	IL82-7BSx3/4	1500	1/2-13	1-1/2	3/4	3/8
IL82-7Bx1	IL82-7BSx1	1500	1/2-13	1-1/2	1	3/8
IL82-7Bx125	IL82-7BSx125	1500	1/2-13	1-1/2	1-1/4	3/8
IL82-7Bx150	IL82-7BSx150	1500	1/2-13	1-1/2	1-1/2	3/8
IL82-7Bx2	IL82-7BSx2	1500	1/2-13	1-1/2	2	3/8
IL82-7Bx238		1500	1/2-13	1-1/2	2-3/8	3/8
IL82-7Bx238-HX		1500	1/2-13	1-1/2	2-3/8	3/8
IL82-7Bx278	IL82-7BSx278	1500	1/2-13	1-1/2	2-7/8	3/8
IL82-7Bx338		1500	1/2-13	1-1/2	3	3/8
IL84-4Bx1/4	IL84-4BSx1/4	100	1/4-20	2	1/4	3/8
IL84-4Bx1/2	IL84-4BSx1/2	100	1/4-20	2	1/2	3/8
IL84-4Bx1/2-HX-SL		100	1/4-20	2	1/2	3/8
IL84-4Bx3/4	IL84-4BSx3/4	100	1/4-20	2	3/4	3/8
IL84-4Bx3/4-HX-SL		100	1/4-20	2	3/4	3/8
IL84-4Bx1	IL84-4BSx1	100	1/4-20	2	1	3/8
IL84-4Bx1-HX-SL		100	1/4-20	2	1	3/8
IL84-4Bx125	IL84-4BSx125	100	1/4-20	2	1-1/4	3/8
IL84-4Bx125-HX-SL		100	1/4-20	2	1-1/4	3/8
IL84-4Bx150	IL84-4BSx150	100	1/4-20	2	1-1/2	3/8
IL84-4Bx175	IL84-4BSx175	100	1/4-20	2	1-3/4	3/8
IL84-4Bx175-HX-SL		100	1/4-20	2	1-3/4	3/8
IL84-4Bx2	IL84-4BSx2	100	1/4-20	2	2	3/8
IL84-4Bx275	IL84-4BSx275	100	1/4-20	2	2-3/4	3/8
IL84-5Bx1/4	IL84-5BSx1/4	500	5/16-18	2	1/4	3/8
IL84-5Bx1/2	IL84-5BSx1/2	500	5/16-18	2	1/2	3/8
IL84-5Bx1/2-HX-SL		500	5/16-18	2	1/2	3/8
IL84-5Bx3/4	IL84-5BSx3/4	500	5/16-18	2	3/4	3/8
IL84-5Bx3/4-HX-SL		500	5/16-18	2	3/4	3/8
IL84-5Bx1	IL84-5BSx1	500	5/16-18	2	1	3/8
IL84-5Bx1-HX-SL		500	5/16-18	2	1	3/8
IL84-5Bx125-HX-SL		500	5/16-18	2	1-1/4	3/8
IL84-5Bx125	IL84-5BSx125	500	5/16-18	2	1-1/4	3/8
IL84-5Bx175	IL84-5BSx175	500	5/16-18	2	1-3/4	3/8
IL84-5Bx175-HX-SL		500	5/16-18	2	1-3/4	3/8
IL84-5Bx225-HX-SL		500	5/16-18	2	2-1/4	3/8



KNOB STYLE GLIDES


The IEC Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, instruments, racks and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.

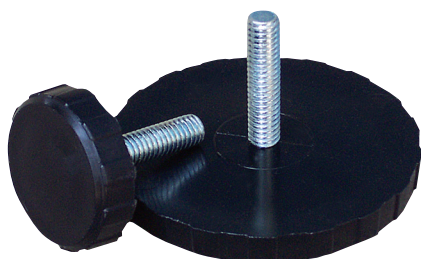
 Top Hex (-HX)
and Slot (-SL)


Many colors available as custom option.

Threaded Nylon Knob Hubs/Sleeves

These glass-filled black nylon threaded knob hubs can be used for many applications; as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used by themselves to create a "thru-hole" knob or as a locking nut.



* Patent Pending

BLACK NYLON THREADED KNOB HUBS


P/N	THREAD	DIA.	HEIGHT
IL80-HUB-4	1/4-20	1"	3/8
IL80-HUB-5	5/16-18	1"	3/8
IL80-HUB-6	3/8-16	1"	3/8
IL80A-HUB-4	1/4-20	1"	3/4
IL80A-HUB-5	5/16-18	1"	3/4
IL80A-HUB-6	3/8-16	1"	3/4

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL84-6Bx1/4	IL84-6BSx1/4	1000	3/8-16	2	1/4	3/8
IL84-6Bx1/2	IL84-6BSx1/2	1000	3/8-16	2	1/2	3/8
IL84-6Bx1/2-HX-SL		1000	3/8-16	2	1/2	3/8
IL84-6Bx3/4-HX-SL		1000	3/8-16	2	3/4	3/8
IL84-6Bx1	IL84-6BSx1	1000	3/8-16	2	1	3/8
IL84-6Bx1-HX-SL		1000	3/8-16	2	1	3/8
IL84-6Bx125	IL84-6BSx125	1000	3/8-16	2	1-1/4	3/8
IL84-6Bx125-HX-SL		1000	3/8-16	2	1-1/4	3/8
IL84-6Bx150	IL84-6BSx150	1000	3/8-16	2	1-1/2	3/8
IL84-6Bx175-HX-SL		1000	3/8-16	2	1-3/4	3/8
IL84-6Bx175	IL84-6BSx175	1000	3/8-16	2	1-3/4	3/8
IL84-6Bx238	IL84-6BSx238	1000	3/8-16	2	2-3/8	3/8
IL84-6Bx238-SL		1000	3/8-16	2	2-3/8	3/8
IL84-6Bx238-HX-SL		1000	3/8-16	2	2-3/8	3/8
IL84-6Bx275-HX-SL		1000	3/8-16	2	2-3/4	3/8
IL84-6Bx338-HX-SL		1000	3/8-16	2	3-3/8	3/8
IL84-7Bx3/4	IL84-7BSx3/4	1500	1/2-13	2	3/4	3/8
IL84-7Bx1	IL84-7BSx1	1500	1/2-13	2	1	3/8
IL84-7Bx125	IL84-7BSx125	1500	1/2-13	2	1-1/4	3/8
IL84-7Bx150	IL84-7BSx150	1500	1/2-13	2	1-1/2	3/8
IL84-7Bx2	IL84-7BSx2	1500	1/2-13	2	2	3/8
IL84-7Bx238		1500	1/2-13	2	2-3/8	3/8
IL84-7Bx238-HX		1500	1/2-13	2	2-3/8	3/8
IL84-7Bx278	IL84-7BSx278	1500	1/2-13	2	2-7/8	3/8
IL84-7Bx3-HX		1500	1/2-13	2	3	3/8
IL86-4Bx1/4	IL86-4BSx1/4	100	1/4-20	2-1/2	1/4	3/8
IL86-4Bx1/2	IL86-4BSx1/2	100	1/4-20	2-1/2	1/2	3/8
IL86-4Bx1/2-HX-SL		100	1/4-20	2-1/2	1/2	3/8
IL86-4Bx3/4	IL86-4BSx3/4	100	1/4-20	2-1/2	3/4	3/8
IL86-4Bx3/4-HX-SL		100	1/4-20	2-1/2	3/4	3/8
IL86-4Bx1	IL86-4BSx1	100	1/4-20	2-1/2	1	3/8
IL86-4Bx1-HX-SL		100	1/4-20	2-1/2	1	3/8
IL86-4Bx125	IL86-4BSx125	100	1/4-20	2-1/2	1-1/4	3/8
IL86-4Bx125-HX-SL		100	1/4-20	2-1/2	1-1/4	3/8
IL86-4Bx150	IL86-4BSx150	100	1/4-20	2-1/2	1-1/2	3/8
IL86-4Bx175	IL86-4BSx175	100	1/4-20	2-1/2	1-3/4	3/8
IL86-4Bx175-HX-SL		100	1/4-20	2-1/2	1-3/4	3/8
IL86-4Bx2	IL86-4BSx2	100	1/4-20	2-1/2	2	3/8
IL86-4Bx275	IL86-4BSx275	100	1/4-20	2-1/2	2-3/4	3/8
IL86-5Bx1/4	IL86-5BSx1/4	500	5/16-18	2-1/2	1/4	3/8
IL86-5Bx1/2	IL86-5BSx1/2	500	5/16-18	2-1/2	1/2	3/8
IL86-5Bx1/2-HX-SL		500	5/16-18	2-1/2	1/2	3/8
IL86-5Bx3/4	IL86-5BSx3/4	500	5/16-18	2-1/2	3/4	3/8
IL86-5Bx3/4-HX-SL		500	5/16-18	2-1/2	3/4	3/8
IL86-5Bx1	IL86-5BSx1	500	5/16-18	2-1/2	1	3/8
IL86-5Bx1-HX-SL		500	5/16-18	2-1/2	1	3/8
IL86-5Bx125-HX-SL		500	5/16-18	2-1/2	1-1/4	3/8
IL86-5Bx125	IL86-5BSx125	500	5/16-18	2-1/2	1-1/4	3/8
IL86-5Bx175	IL86-5BSx175	500	5/16-18	2-1/2	1-3/4	3/8
IL86-5Bx175-HX-SL		500	5/16-18	2-1/2	1-3/4	3/8
IL86-5Bx225-HX-SL		500	5/16-18	2-1/2	2-1/4	3/8
IL86-6Bx1/4	IL86-6BSx1/4	1000	3/8-16	2-1/2	1/4	3/8
IL86-6Bx1/2	IL86-6BSx1/2	1000	3/8-16	2-1/2	1/2	3/8
IL86-6Bx1/2-HX-SL		1000	3/8-16	2-1/2	1/2	3/8
IL86-6Bx3/4-HX-SL		1000	3/8-16	2-1/2	3/4	3/8
IL86-6Bx1	IL86-6BSx1	1000	3/8-16	2-1/2	1	3/8
IL86-6Bx1-HX-SL		1000	3/8-16	2-1/2	1	3/8
IL86-6Bx125	IL86-6BSx125	1000	3/8-16	2-1/2	1-1/4	3/8
IL86-6Bx125-HX-SL		1000	3/8-16	2-1/2	1-1/4	3/8
IL86-6Bx150	IL86-6BSx150	1000	3/8-16	2-1/2	1-1/2	3/8
IL86-6Bx175-HX-SL		1000	3/8-16	2-1/2	1-3/4	3/8
IL86-6Bx175	IL86-6BSx175	1000	3/8-16	2-1/2	1-3/4	3/8
IL86-6Bx238	IL86-6BSx238	1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx238-SL		1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx238-HX-SL		1000	3/8-16	2-1/2	2-3/8	3/8
IL86-6Bx275-HX-SL		1000	3/8-16	2-1/2	2-3/4	3/8
IL86-6Bx338-HX-SL		1000	3/8-16	2-1/2	3-3/8	3/8
IL86-7Bx3/4	IL86-7BSx3/4	1500	1/2-13	2-1/2	3/4	3/8
IL86-7Bx1	IL86-7BSx1	1500	1/2-13	2-1/2	1	3/8
IL86-7Bx125	IL86-7BSx125	1500	1/2-13	2-1/2	1-1/4	3/8
IL86-7Bx150	IL86-7BSx150	1500	1/2-13	2-1/2	1-1/2	3/8
IL86-7Bx2	IL86-7BSx2	1500	1/2-13	2-1/2	2	3/8
IL86-7Bx238		1500	1/2-13	2-1/2	2-3/8	3/8
IL86-7Bx238-HX		1500	1/2-13	2-1/2	2-3/8	3/8
IL86-7Bx278	IL86-7BSx278	1500	1/2-13	2-1/2	2-7/8	3/8
IL86-7Bx3-HX		1500	1/2-13	2-1/2	3	3/8



KNOB STYLE GLIDES

The IEC Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number.

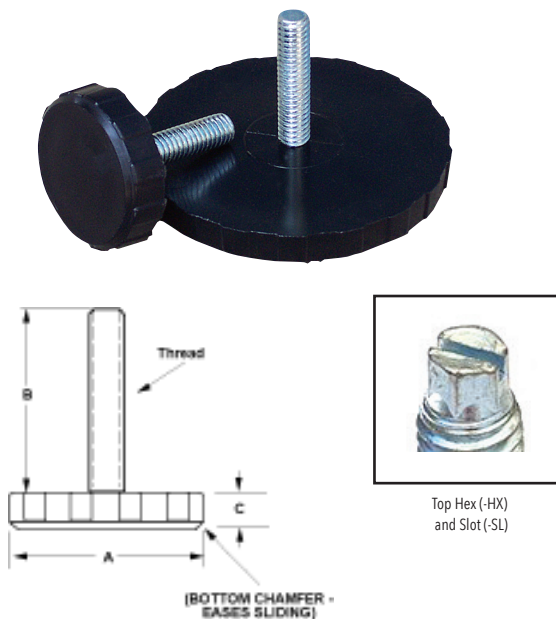

Many colors available as custom option.

KNOB STYLE SOCKET TYPE GLIDES (LEVELERS/KNOBS)

These low-profile polypropylene levelers/knobs are designed for use with socket head allen bolts or threaded rod of various lengths. They are available with three different female thread types: brass insert (-BI), steel hex nut (-HN), or threads molded directly into the polypropylene (-MT). The height of all base sizes is 3/8" thick. The PVC base is a flexible, non-skid and non-marring, rubber-like material.





Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel Knob Style Glides						
IL88-4Bx1/4	IL88-4BSx1/4	100	1/4-20	3	1/4	3/8
IL88-4Bx1/2	IL88-4BSx1/2	100	1/4-20	3	1/2	3/8
IL88-4Bx1/2-HX-SL		100	1/4-20	3	1/2	3/8
IL88-4Bx3/4	IL88-4BSx3/4	100	1/4-20	3	3/4	3/8
IL88-4Bx3/4-HX-SL		100	1/4-20	3	3/4	3/8
IL88-4Bx1	IL88-4BSx1	100	1/4-20	3	1	3/8
IL88-4Bx1-HX-SL		100	1/4-20	3	1	3/8
IL88-4Bx125	IL88-4BSx125	100	1/4-20	3	1-1/4	3/8
IL88-4Bx125-HX-SL		100	1/4-20	3	1-1/4	3/8
IL88-4Bx150	IL88-4BSx150	100	1/4-20	3	1-1/2	3/8
IL88-4Bx175	IL88-4BSx175	100	1/4-20	3	1-3/4	3/8
IL88-4Bx175-HX-SL		100	1/4-20	3	1-3/4	3/8
IL88-4Bx2	IL88-4BSx2	100	1/4-20	3	2	3/8
IL88-4Bx275	IL88-4BSx275	100	1/4-20	3	2-3/4	3/8
IL88-5Bx1/4	IL88-5BSx1/4	500	5/16-18	3	1/4	3/8
IL88-5Bx1/2	IL88-5BSx1/2	500	5/16-18	3	1/2	3/8
IL88-5Bx1/2-HX-SL		500	5/16-18	3	1/2	3/8
IL88-5Bx3/4	IL88-5BSx3/4	500	5/16-18	3	3/4	3/8
IL88-5Bx3/4-HX-SL		500	5/16-18	3	3/4	3/8
IL88-5Bx1	IL88-5BSx1	500	5/16-18	3	1	3/8
IL88-5Bx1-HX-SL		500	5/16-18	3	1	3/8
IL88-5Bx125-HX-SL		500	5/16-18	3	1-1/4	3/8
IL88-5Bx125	IL88-5BSx125	500	5/16-18	3	1-1/4	3/8
IL88-5Bx175	IL88-5BSx175	500	5/16-18	3	1-3/4	3/8
IL88-5Bx175-HX-SL		500	5/16-18	3	1-3/4	3/8
IL88-5Bx225-HX-SL		500	5/16-18	3	2-1/4	3/8
IL88-6Bx1/4	IL88-6BSx1/4	1000	3/8-16	3	1/4	3/8
IL88-6Bx1/2	IL88-6BSx1/2	1000	3/8-16	3	1/2	3/8
IL88-6Bx1/2-HX-SL		1000	3/8-16	3	1/2	3/8
IL88-6Bx3/4-HX-SL		1000	3/8-16	3	3/4	3/8
IL88-6Bx1	IL88-6BSx1	1000	3/8-16	3	1	3/8
IL88-6Bx1-HX-SL		1000	3/8-16	3	1	3/8
IL88-6Bx125	IL88-6BSx125	1000	3/8-16	3	1-1/4	3/8
IL88-6Bx125-HX-SL		1000	3/8-16	3	1-1/4	3/8
IL88-6Bx150	IL88-6BSx150	1000	3/8-16	3	1-1/2	3/8
IL88-6Bx175-HX-SL		1000	3/8-16	3	1-3/4	3/8
IL88-6Bx175	IL88-6BSx175	1000	3/8-16	3	1-3/4	3/8
IL88-6Bx238	IL88-6BSx238	1000	3/8-16	3	2-3/8	3/8
IL88-6Bx238-SL		1000	3/8-16	3	2-3/8	3/8
IL88-6Bx238-HX-SL		1000	3/8-16	3	2-3/8	3/8
IL88-6Bx275-HX-SL		1000	3/8-16	3	2-3/4	3/8
IL88-6Bx338-HX-SL		1000	3/8-16	3	3-3/8	3/8

PN (brass)	PN (hex nut)	PN(molded)	Thread	Base Dia.	Load (lbs.)
IL83-4B-BI	IL83-4B-HN	IL83-4B-MT	1/4-20	1-1/2	100
IL83-5B-BI	IL83-5B-HN	IL83-5B-MT	5/16-18	1-1/2	250
IL83-6B-BI	IL83-6B-HN	IL83-6B-MT	3/8-16	1-1/2	250
IL85-4B-BI	IL85-4B-HN	IL85-4B-MT	1/4-20	2	100
IL85-5B-BI	IL85-5B-HN	IL85-5B-MT	5/16-18	2	250
IL85-6B-BI	IL85-6B-HN	IL85-6B-MT	3/8-16	2	250
IL87-4B-BI	IL87-4B-HN	IL87-4B-MT	1/4-20	2-1/2	100
IL87-5B-BI	IL87-5B-HN	IL87-5B-MT	5/16-18	2-1/2	250
IL87-6B-BI	IL87-6B-HN	IL87-6B-MT	3/8-16	2-1/2	250
IL89-4B-BI	IL89-4B-HN	IL89-4B-MT	1/4-20	3	100
IL89-5B-BI	IL89-5B-HN	IL89-5B-MT	5/16-18	3	250
IL89-6B-BI	IL89-6B-HN	IL89-6B-MT	3/8-16	3	250

PN (PVC)	Thread	Base Dia.	Load (lbs.)
IL83-4B-HN-PVC	1/4-20	1-1/2	75
IL83-5B-HN-PVC	5/16-18	1-1/2	75
IL83-6B-HN-PVC	3/8-16	1-1/2	75


MEDIUM-DUTY LEVELERS
KNOB STYLE - METRIC
KNOB STYLE GLIDES - New Metric Sizes

The IEC Metric Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, instruments, racks and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot are standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number. Up to 1,000 lb. load ratings.

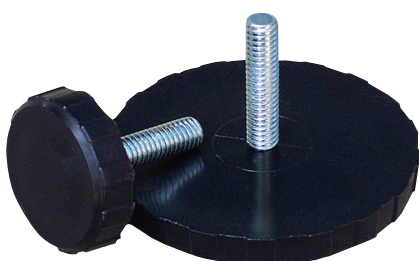
 Top Hex (-HX)
and Slot (-SL)

Steel	SS	Load	Thread	A	B	C
METRIC - Steel and Stainless Steel Knob Style Glides						
IL82-M6Bx6	IL82-M6BSx6	100	M6	38	6	10
IL82-M6Bx12	IL82-M6BSx12	100	M6	38	12	10
IL82-M6Bx25	IL82-M6BSx25	100	M6	38	25	10
IL82-M8Bx6	IL82-M8BSx6	500	M8	38	6	10
IL82-M8Bx12	IL82-M8BSx12	500	M8	38	12	10
IL82-M8Bx25	IL82-M8BSx25	500	M8	38	25	10
IL82-M8Bx45	IL82-M8BSx45	500	M8	38	45	10
IL82-M10Bx15	IL82-M10BSx15	1000	M10	38	15	10
IL82-M10Bx20	IL82-M10BSx20	1000	M10	38	20	10
IL82-M10Bx25	IL82-M10BSx25	1000	M10	38	25	10
IL82-M10Bx40	IL82-M10BSx40	1000	M10	38	40	10
IL84-M6Bx6	IL84-M6BSx6	100	M6	51	6	10
IL84-M6Bx12	IL84-M6BSx12	100	M6	51	12	10
IL84-M6Bx25	IL84-M6BSx25	100	M6	51	25	10
IL84-M8Bx6	IL84-M8BSx6	500	M8	51	6	10
IL84-M8Bx12	IL84-M8BSx12	500	M8	51	12	10
IL84-M8Bx25	IL84-M8BSx25	500	M8	51	25	10
IL84-M8Bx45	IL84-M8BSx45	500	M8	51	45	10
IL84-M10Bx15	IL84-M10BSx15	1000	M10	51	15	10
IL84-M10Bx20	IL84-M10BSx20	1000	M10	51	20	10
IL84-M10Bx25	IL84-M10BSx25	1000	M10	51	25	10
IL84-M10Bx40	IL84-M10BSx40	1000	M10	51	40	10
IL86-M6Bx6	IL86-M6BSx6	100	M6	64	6	10
IL86-M6Bx12	IL86-M6BSx12	100	M6	64	12	10
IL86-M6Bx25	IL86-M6BSx25	100	M6	64	25	10
IL86-M8Bx6	IL86-M8BSx6	500	M8	64	6	10
IL86-M8Bx12	IL86-M8BSx12	500	M8	64	12	10
IL86-M8Bx25	IL86-M8BSx25	500	M8	64	25	10
IL86-M8Bx45	IL86-M8BSx45	500	M8	64	45	10
IL86-M10Bx15	IL86-M10BSx15	1000	M10	64	15	10
IL86-M10Bx20	IL86-M10BSx20	1000	M10	64	20	10
IL86-M10Bx25	IL86-M10BSx25	1000	M10	64	25	10
IL86-M10Bx40	IL86-M10BSx40	1000	M10	64	40	10
IL88-M6Bx6	IL88-M6BSx6	100	M6	76	6	10
IL88-M6Bx12	IL88-M6BSx12	100	M6	76	12	10
IL88-M6Bx25	IL88-M6BSx25	100	M6	76	25	10
IL88-M8Bx6	IL88-M8BSx6	500	M8	76	6	10
IL88-M8Bx12	IL88-M8BSx12	500	M8	76	12	10
IL88-M8Bx25	IL88-M8BSx25	500	M8	76	25	10
IL88-M8Bx45	IL88-M8BSx45	500	M8	76	45	10
IL88-M10Bx15	IL88-M10BSx15	1000	M10	76	15	10
IL88-M10Bx20	IL88-M10BSx20	1000	M10	76	20	10
IL88-M10Bx25	IL88-M10BSx25	1000	M10	76	25	10
IL88-M10Bx40	IL88-M10BSx40	1000	M10	76	40	10

36A - Metric Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.



Many colors available as custom option.

Steel	SS	Load	Thread	A	B	C
36A - METRIC - Steel and Stainless Steel Knob Style Glides (PVC base)						
IL82-M6Bx6-PVC	IL82-M6BSx6-PVC	100	M6	38	6	10
IL82-M6Bx12-PVC	IL82-M6BSx12-PVC	100	M6	38	12	10
IL82-M6Bx25-PVC	IL82-M6BSx25-PVC	100	M6	38	25	10
IL82-M8Bx6-PVC	IL82-M8BSx6-PVC	100	M8	38	6	10
IL82-M8Bx12-PVC	IL82-M8BSx12-PVC	100	M8	38	12	10
IL82-M8Bx25-PVC	IL82-M8BSx25-PVC	100	M8	38	25	10
IL82-M8Bx45-PVC	IL82-M8BSx45-PVC	100	M8	38	45	10
IL82-M10Bx15-PVC	IL82-M10BSx15-PVC	100	M10	38	15	10
IL82-M10Bx20-PVC	IL82-M10BSx20-PVC	100	M10	38	20	10
IL82-M10Bx25-PVC	IL82-M10BSx25-PVC	100	M10	38	25	10
IL82-M10Bx40-PVC	IL82-M10BSx40-PVC	100	M10	38	40	10
IL84-M6Bx6-PVC	IL84-M6BSx6-PVC	100	M6	51	6	10
IL84-M6Bx12-PVC	IL84-M6BSx12-PVC	100	M6	51	12	10
IL84-M6Bx25-PVC	IL84-M6BSx25-PVC	100	M6	51	25	10
IL84-M8Bx6-PVC	IL84-M8BSx6-PVC	100	M8	51	6	10
IL84-M8Bx12-PVC	IL84-M8BSx12-PVC	100	M8	51	12	10
IL84-M8Bx25-PVC	IL84-M8BSx25-PVC	100	M8	51	25	10
IL84-M8Bx45-PVC	IL84-M8BSx45-PVC	100	M8	51	45	10
IL84-M10Bx15-PVC	IL84-M10BSx15-PVC	100	M10	51	15	10
IL84-M10Bx20-PVC	IL84-M10BSx20-PVC	100	M10	51	20	10
IL84-M10Bx25-PVC	IL84-M10BSx25-PVC	100	M10	51	25	10
IL84-M10Bx40-PVC	IL84-M10BSx40-PVC	100	M10	51	40	10



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com


MEDIUM-DUTY LEVELERS

HI-PRO KNOB STYLE GLIDES


HIGH PROFILE KNOB STYLE GLIDES

The IEC High Profile Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These high-profile, polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Useful in both feet and knob applications.

The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number. Available in two base sizes, 1-1/2" and 2".



Many colors available as custom option.



Top Hex (-HX)
and Slot (-SL)

46 - High Profile Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.

Steel	SS	Load	Thread	A	B	C
46-Steel and Stainless Steel High Profile Knob Style (PVC Base) Glides						
IL82-HP-4Bx1/4-PVC	IL82-HP-4BSx1/4-PVC	100	1/4-20	1-1/2	1/4	3/8
IL82-HP-4Bx1/2-PVC	IL82-HP-4BSx1/2-PVC	100	1/4-20	1-1/2	1/2	3/8
IL82-HP-4Bx1-PVC	IL82-HP-4BSx1-PVC	100	1/4-20	1-1/2	1	3/8
IL82-HP-4Bx125-PVC	IL82-HP-4BSx125-PVC	100	1/4-20	1-1/2	1-1/4	3/8
IL82-HP-4Bx175-PVC	IL82-HP-4BSx175-PVC	100	1/4-20	1-1/2	1-3/4	3/8
IL82-HP-4Bx2-PVC	IL82-HP-4BSx2-PVC	100	1/4-20	1-1/2	2	3/8
IL82-HP-4Bx275-PVC	IL82-HP-4BSx275-PVC	100	1/4-20	1-1/2	2-3/4	3/8
IL82-HP-5Bx1/2-PVC	IL82-HP-5BSx1/2-PVC	100	5/16-18	1-1/2	1/2	3/8
IL82-HP-5Bx1-PVC	IL82-HP-5BSx1-PVC	100	5/16-18	1-1/2	1	3/8
IL82-HP-5Bx125-PVC	IL82-HP-5BSx125-PVC	100	5/16-18	1-1/2	1-1/4	3/8
IL82-HP-5Bx175-PVC	IL82-HP-5BSx175-PVC	100	5/16-18	1-1/2	1-3/4	3/8
IL82-HP-5Bx225-HX-SL-PVC	IL82-HP-5BSx225-HX-SL-PVC	100	5/16-18	1-1/2	2-1/4	3/8
IL82-HP-6Bx1/2-PVC	IL82-HP-6BSx1/2-PVC	100	3/8-16	1-1/2	1/2	3/8
IL82-HP-6Bx1-PVC	IL82-HP-6BSx1-PVC	100	3/8-16	1-1/2	1	3/8
IL82-HP-6Bx125-PVC	IL82-HP-6BSx125-PVC	100	3/8-16	1-1/2	1-1/4	3/8
IL82-HP-6Bx175-PVC	IL82-HP-6BSx175-PVC	100	3/8-16	1-1/2	1-3/4	3/8
IL82-HP-6Bx238-PVC	IL82-HP-6BSx238-PVC	100	3/8-16	1-1/2	2-3/8	3/8
IL82-HP-6Bx275-HX-SL-PVC	IL82-HP-6BSx275-HX-SL-PVC	100	3/8-16	1-1/2	2-3/4	3/8
IL82-HP-6Bx338-HX-SL-PVC	IL82-HP-6BSx338-HX-SL-PVC	100	3/8-16	1-1/2	3-3/8	3/8
IL84-HP-4Bx1/4-PVC	IL84-HP-4BSx1/4-PVC	100	1/4-20	2	1/4	3/8
IL84-HP-4Bx1/2-PVC	IL84-HP-4BSx1/2-PVC	100	1/4-20	2	1/2	3/8
IL84-HP-4Bx1-PVC	IL84-HP-4BSx1-PVC	100	1/4-20	2	1	3/8
IL84-HP-4Bx125-PVC	IL84-HP-4BSx125-PVC	100	1/4-20	2	1-1/4	3/8
IL84-HP-4Bx175-PVC	IL84-HP-4BSx175-PVC	100	1/4-20	2	1-3/4	3/8
IL84-HP-4Bx2-PVC	IL84-HP-4BSx2-PVC	100	1/4-20	2	2	3/8
IL84-HP-4Bx275-PVC	IL84-HP-4BSx275-PVC	100	1/4-20	2	2-3/4	3/8
IL84-HP-5Bx1/2-PVC	IL84-HP-5BSx1/2-PVC	100	5/16-18	2	1/2	3/8
IL84-HP-5Bx1-PVC	IL84-HP-5BSx1-PVC	100	5/16-18	2	1	3/8
IL84-HP-5Bx125-PVC	IL84-HP-5BSx125-PVC	100	5/16-18	2	1-1/4	3/8
IL84-HP-5Bx175-PVC	IL84-HP-5BSx175-PVC	100	5/16-18	2	1-3/4	3/8
IL84-HP-5Bx225-HX-SL-PVC	IL84-HP-5BSx225-HX-SL-PVC	100	5/16-18	2	2-1/4	3/8
IL84-HP-6Bx1/2-PVC	IL84-HP-6BSx1/2-PVC	100	3/8-16	2	1/2	3/8
IL84-HP-6Bx1-PVC	IL84-HP-6BSx1-PVC	100	3/8-16	2	1	3/8
IL84-HP-6Bx125-PVC	IL84-HP-6BSx125-PVC	100	3/8-16	2	1-1/4	3/8
IL84-HP-6Bx175-PVC	IL84-HP-6BSx175-PVC	100	3/8-16	2	1-3/4	3/8
IL84-HP-6Bx238-PVC	IL84-HP-6BSx238-PVC	100	3/8-16	2	2-3/8	3/8
IL84-HP-6Bx275-HX-SL-PVC	IL84-HP-6BSx275-HX-SL-PVC	100	3/8-16	2	2-3/4	3/8
IL84-HP-6Bx338-HX-SL-PVC	IL84-HP-6BSx338-HX-SL-PVC	100	3/8-16	2	3-3/8	3/8

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Knob Style Glides						
IL82-HP-4Bx1/4	IL82-HP-4BSx1/4	100	1/4-20	1-1/2	1/4	3/8
IL82-HP-4Bx1/2	IL82-HP-4BSx1/2	100	1/4-20	1-1/2	1/2	3/8
IL82-HP-4Bx1/2-HX-SL		100	1/4-20	1-1/2	1/2	3/8
IL82-HP-4Bx3/4	IL82-HP-4BSx3/4	100	1/4-20	1-1/2	3/4	3/8
IL82-HP-4Bx3/4-HX-SL		100	1/4-20	1-1/2	3/4	3/8
IL82-HP-4Bx1	IL82-HP-4BSx1	100	1/4-20	1-1/2	1	3/8
IL82-HP-4Bx1-HX-SL		100	1/4-20	1-1/2	1	3/8
IL82-HP-4Bx125	IL82-HP-4BSx125	100	1/4-20	1-1/2	1-1/4	3/8
IL82-HP-4Bx125-HX-SL		100	1/4-20	1-1/2	1-1/4	3/8
IL82-HP-4Bx150	IL82-HP-4BSx150	100	1/4-20	1-1/2	1-1/2	3/8
IL82-HP-4Bx175	IL82-HP-4BSx175	100	1/4-20	1-1/2	1-3/4	3/8
IL82-HP-4Bx175-HX-SL		100	1/4-20	1-1/2	1-3/4	3/8
IL82-HP-4Bx2	IL82-HP-4BSx2	100	1/4-20	1-1/2	2	3/8
IL82-HP-4Bx275	IL82-HP-4BSx275	100	1/4-20	1-1/2	2-3/4	3/8
IL82-HP-5Bx1/4	IL82-HP-5BSx1/4	500	5/16-18	1-1/2	1/4	3/8
IL82-HP-5Bx1/2	IL82-HP-5BSx1/2	500	5/16-18	1-1/2	1/2	3/8
IL82-HP-5Bx1/2-HX-SL		500	5/16-18	1-1/2	1/2	3/8
IL82-HP-5Bx3/4	IL82-HP-5BSx3/4	500	5/16-18	1-1/2	3/4	3/8
IL82-HP-5Bx3/4-HX-SL		500	5/16-18	1-1/2	3/4	3/8
IL82-HP-5Bx1	IL82-HP-5BSx1	500	5/16-18	1-1/2	1	3/8
IL82-HP-5Bx1-HX-SL		500	5/16-18	1-1/2	1	3/8
IL82-HP-5Bx125-HX-SL		500	5/16-18	1-1/2	1-1/4	3/8
IL82-HP-5Bx125	IL82-HP-5BSx125	500	5/16-18	1-1/2	1-1/4	3/8
IL82-HP-5Bx175	IL82-HP-5BSx175	500	5/16-18	1-1/2	1-3/4	3/8
IL82-HP-5Bx175-HX-SL		500	5/16-18	1-1/2	1-3/4	3/8
IL82-HP-5Bx225-HX-SL		500	5/16-18	1-1/2	2-1/4	3/8
IL82-HP-6Bx1/4	IL82-HP-6BSx1/4	1000	3/8-16	1-1/2	1/4	3/8
IL82-HP-6Bx1/2	IL82-HP-6BSx1/2	1000	3/8-16	1-1/2	1/2	3/8
IL82-HP-6Bx1/2-HX-SL		1000	3/8-16	1-1/2	1/2	3/8
IL82-HP-6Bx3/4-HX-SL		1000	3/8-16	1-1/2	3/4	3/8
IL82-HP-6Bx1	IL82-HP-6BSx1	1000	3/8-16	1-1/2	1	3/8
IL82-HP-6Bx1-HX-SL		1000	3/8-16	1-1/2	1	3/8
IL82-HP-6Bx125	IL82-HP-6BSx125	1000	3/8-16	1-1/2	1-1/4	3/8
IL82-HP-6Bx125-HX-SL		1000	3/8-16	1-1/2	1-1/4	3/8
IL82-HP-6Bx150	IL82-HP-6BSx150	1000	3/8-16	1-1/2	1-1/2	3/8
IL82-HP-6Bx175-HX-SL		1000	3/8-16	1-1/2	1-3/4	3/8
IL82-HP-6Bx175	IL82-HP-6BSx175	1000	3/8-16	1-1/2	1-3/4	3/8
IL82-HP-6Bx238	IL82-HP-6BSx238	1000	3/8-16	1-1/2	2-3/8	3/8
IL82-HP-6Bx238-SL		1000	3/8-16	1-1/2	2-3/8	3/8
IL82-HP-6Bx238-HX-SL		1000	3/8-16	1-1/2	2-3/8	3/8
IL82-HP-6Bx275-HX-SL		1000	3/8-16	1-1/2	2-3/4	3/8
IL82-HP-6Bx338-HX-SL		1000	3/8-16	1-1/2	3-3/8	3/8
IL82-HP-7Bx3/4	IL82-HP-7BSx3/4	1500	1/2-13	1-1/2	3/4	3/8
IL82-HP-7Bx1	IL82-HP-7BSx1	1500	1/2-13	1-1/2	1	3/8
IL82-HP-7Bx125	IL82-HP-7BSx125	1500	1/2-13	1-1/2	1-1/4	3/8
IL82-HP-7Bx150	IL82-HP-7BSx150	1500	1/2-13	1-1/2	1-1/2	3/8
IL82-HP-7Bx2	IL82-HP-7BSx2	1500	1/2-13	1-1/2	2	3/8
IL82-HP-7Bx238		1500	1/2-13	1-1/2	2-3/8	3/8
IL82-HP-7Bx238-HX		1500	1/2-13	1-1/2	2-3/8	3/8
IL82-HP-7Bx278	IL82-HP-7BSx278	1500	1/2-13	1-1/2	2-7/8	3/8
IL82-HP-7Bx3-HX		1500	1/2-13	1-1/2	3	3/8
IL84-HP-4Bx1/4	IL84-HP-4BSx1/4	100	1/4-20	2	1/4	3/8
IL84-HP-4Bx1/2	IL84-HP-4BSx1/2	100	1/4-20	2	1/2	3/8
IL84-HP-4Bx1/2-HX-SL		100	1/4-20	2	1/2	3/8
IL84-HP-4Bx3/4	IL84-HP-4BSx3/4	100	1/4-20	2	3/4	3/8
IL84-HP-4Bx3/4-HX-SL		100	1/4-20	2	3/4	3/8
IL84-HP-4Bx1	IL84-HP-4BSx1	100	1/4-20	2	1	3/8
IL84-HP-4Bx1-HX-SL		100	1/4-20	2	1	3/8
IL84-HP-4Bx125	IL84-HP-4BSx125	100	1/4-20	2	1-1/4	3/8
IL84-HP-4Bx125-HX-SL		100	1/4-20	2	1-1/4	3/8
IL84-HP-4Bx150	IL84-HP-4BSx150	100	1/4-20	2	1-1/2	3/8
IL84-HP-4Bx175	IL84-HP-4BSx175	100	1/4-20	2	1-3/4	3/8
IL84-HP-4Bx175-HX-SL		100	1/4-20	2	1-3/4	3/8
IL84-HP-4Bx2	IL84-HP-4BSx2	100	1/4-20	2	2	3/8
IL84-HP-4Bx275	IL84-HP-4BSx275	100	1/4-20	2	2-3/4	3/8
IL84-HP-5Bx1/4	IL84-HP-5BSx1/4	500	5/16-18	2	1/4	3/8
IL84-HP-5Bx1/2	IL84-HP-5BSx1/2	500	5/16-18	2	1/2	3/8
IL84-HP-5Bx1/2-HX-SL		500	5/16-18	2	1/2	3/8
IL84-HP-5Bx3/4	IL84-HP-5BSx3/4	500	5/16-18	2	3/4	3/8
IL84-HP-5Bx3/4-HX-SL		500	5/16-18	2	3/4	3/8
IL84-HP-5Bx1	IL84-HP-5BSx1	500	5/16-18	2	1	3/8
IL84-HP-5Bx1-HX-SL		500	5/16-18	2	1	3/8
IL84-HP-5Bx125-HX-SL		500	5/16-18	2	1-1/4	3/8
IL84-HP-5Bx125	IL84-HP-5BSx125	500	5/16-18	2	1-1/4	3/8
IL84-HP-5Bx175	IL84-HP-5BSx175	500	5/16-18	2	1-3/4	3/8
IL84-HP-5Bx175-HX-SL		500	5/16-18	2	1-3/4	3/8
IL84-HP-5Bx225-HX-SL		500	5/16-18	2	2-1/4	3/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com


MEDIUM-DUTY LEVELERS

HI-PRO KNOB STYLE GLIDES


HIGH PROFILE KNOB STYLE GLIDES

The IEC High Profile Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These high-profile, polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Useful in both feet and knob applications.

The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number. Available in two base sizes, 1-1/2" and 2".

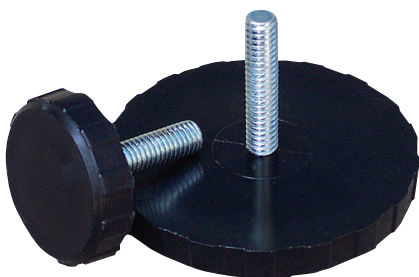

Top Hex (-HX)
and Slot (-SL)




Many colors available as custom option.

Steel	SS	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Knob Style Glides						
IL84-HP-6Bx1/4	IL84-HP-6BSx1/4	1000	3/8-16	2	1/4	3/8
IL84-HP-6Bx1/2	IL84-HP-6BSx1/2	1000	3/8-16	2	1/2	3/8
IL84-HP-6Bx1/2-HX-SL		1000	3/8-16	2	1/2	3/8
IL84-HP-6Bx3/4-HX-SL		1000	3/8-16	2	3/4	3/8
IL84-HP-6Bx1	IL84-HP-6BSx1	1000	3/8-16	2	1	3/8
IL84-HP-6Bx1-HX-SL		1000	3/8-16	2	1	3/8
IL84-HP-6Bx125	IL84-HP-6BSx125	1000	3/8-16	2	1-1/4	3/8
IL84-HP-6Bx125-HX-SL		1000	3/8-16	2	1-1/4	3/8
IL84-HP-6Bx150	IL84-HP-6BSx150	1000	3/8-16	2	1-1/2	3/8
IL84-HP-6Bx175-HX-SL		1000	3/8-16	2	1-3/4	3/8
IL84-HP-6Bx175	IL84-HP-6BSx175	1000	3/8-16	2	1-3/4	3/8
IL84-HP-6Bx238	IL84-HP-6BSx238	1000	3/8-16	2	2-3/8	3/8
IL84-HP-6Bx238-SL		1000	3/8-16	2	2-3/8	3/8
IL84-HP-6Bx238-HX-SL		1000	3/8-16	2	2-3/8	3/8
IL84-HP-6Bx275-HX-SL		1000	3/8-16	2	2-3/4	3/8
IL84-HP-6Bx338-HX-SL		1000	3/8-16	2	3-3/8	3/8
IL84-HP-7Bx3/4	IL84-HP-7BSx3/4	1500	1/2-13	2	3/4	3/8
IL84-HP-7Bx1	IL84-HP-7BSx1	1500	1/2-13	2	1	3/8
IL84-HP-7Bx125	IL84-HP-7BSx125	1500	1/2-13	2	1-1/4	3/8
IL84-HP-7Bx150	IL84-HP-7BSx150	1500	1/2-13	2	1-1/2	3/8
IL84-7Bx2	IL84-HP-7BSx2	1500	1/2-13	2	2	3/8
IL84-HP-7Bx238		1500	1/2-13	2	2-3/8	3/8
IL84-HP-7Bx238-HX		1500	1/2-13	2	2-3/8	3/8
IL84-7Bx278	IL84-HP-7BSx278	1500	1/2-13	2	2-7/8	3/8
IL84-7Bx3-HX		1500	1/2-13	2	3	3/8

Threaded Nylon Knob Hubs/Sleeves

These glass-filled black nylon threaded knob hubs can be used for many applications; as an adjustable height shoulder on a knob or leveler or stacked to create a sleeve to hide the threads of a leveler or knob. This will also help stabilize loads positioned near the top threads of long studs. They can also be used by themselves to create a "thru-hole" knob or as a locking nut.



* Patent Pending

BLACK NYLON THREADED KNOB HUBS


P/N	THREAD	DIA.	HEIGHT
IL80-HUB-4	1/4-20	1"	3/8
IL80-HUB-5	5/16-18	1"	3/8
IL80-HUB-6	3/8-16	1"	3/8
IL80A-HUB-4	1/4-20	1"	3/4
IL80A-HUB-5	5/16-18	1"	3/4
IL80A-HUB-6	3/8-16	1"	3/4



KNOB STYLE GLIDES – NYLON THREADS

The IEC Knob Style Nylon Thread Glide is ideal for light duty load requirements. These low-profile, solid bottom, large diameter black polypropylene base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Useful in both feet and knob applications.

Nylon threads are especially beneficial for food, medical, marine, electrical, outdoor furniture and many other applications where electrical isolation, magnetism or corrosion is a concern.



Steel	Load	Thread	A	B	C
Nylon Thread Knob Style Glides					
IL82-4BX3/8-NYL	50	1/4-20	1-1/2	3/8	3/8
IL82-4BX1/2-NYL	50	1/4-20	1-1/2	1/2	3/8
IL82-4BX5/8-NYL	50	1/4-20	1-1/2	5/8	3/8
IL82-4BX7/8-NYL	50	1/4-20	1-1/2	7/8	3/8
IL82-4BX1-NYL	50	1/4-20	1-1/2	1	3/8
IL82-4BX1-3/8-NYL	50	1/4-20	1-1/2	1-3/8	3/8
IL82-4BX1-7/8-NYL	50	1/4-20	1-1/2	1-7/8	3/8
IL82-5BX3/8-NYL	75	5/16-18	1-1/2	3/8	3/8
IL82-5BX5/8-NYL	75	5/16-18	1-1/2	5/8	3/8
IL82-5BX7/8-NYL	75	5/16-18	1-1/2	7/8	3/8
IL82-5BX1-NYL	75	5/16-18	1-1/2	1	3/8
IL82-5BX1-3/8-NYL	75	5/16-18	1-1/2	1-3/8*	3/8
IL82-5BX1-7/8-NYL	75	5/16-18	1-1/2	1-7/8*	3/8
IL82-5BX2-3/8-NYL	75	5/16-18	1-1/2	2-3/8*	3/8
IL82-6BX3/8-NYL	100	3/8-16	1-1/2	3/8	3/8
IL82-6BX5/8-NYL	100	3/8-16	1-1/2	5/8	3/8
IL82-6BX7/8-NYL	100	3/8-16	1-1/2	7/8	3/8
IL82-6BX1-NYL	100	3/8-16	1-1/2	1	3/8
IL82-6BX1-3/8-NYL	100	3/8-16	1-1/2	1-3/8	3/8
IL82-6BX1-7/8-NYL	100	3/8-16	1-1/2	1-7/8	3/8
IL82-6BX2-3/8-NYL	100	3/8-16	1-1/2	2-3/8	3/8
IL84-4BX3/8-NYL	50	1/4-20	2	3/8	3/8
IL84-4BX1/2-NYL	50	1/4-20	2	1/2	3/8
IL84-4BX5/8-NYL	50	1/4-20	2	5/8	3/8
IL84-4BX7/8-NYL	50	1/4-20	2	7/8	3/8
IL84-4BX1-NYL	50	1/4-20	2	1	3/8
IL84-4BX1-3/8-NYL	50	1/4-20	2	1-3/8	3/8
IL84-4BX1-7/8-NYL	50	1/4-20	2	1-7/8	3/8
IL84-5BX3/8-NYL	75	5/16-18	2	3/8	3/8
IL84-5BX5/8-NYL	75	5/16-18	2	5/8	3/8
IL84-5BX7/8-NYL	75	5/16-18	2	7/8	3/8
IL84-5BX1-NYL	75	5/16-18	2	1	3/8
IL84-5BX1-3/8-NYL	75	5/16-18	2	1-3/8*	3/8
IL84-5BX1-7/8-NYL	75	5/16-18	2	1-7/8*	3/8
IL84-5BX2-3/8-NYL	75	5/16-18	2	2-3/8*	3/8

* Partially threaded 1" length

KNOB STYLE SOCKET TYPE GLIDES (LEVELERS/KNOBS)

These low-profile polypropylene levelers/knobs are designed for use with socket head allen bolts or threaded rod of various lengths. They are available with three different female thread types: brass insert (-BI), steel hex nut (-HN), or threads molded directly into the polypropylene (-MT). The height of all base sizes is 3/8" thick. The PVC base is a flexible, non-skid and non-marring, rubber-like material.




Steel	Load	Thread	A	B	C
Nylon Thread Knob Style Glides (continued)					
IL84-6BX3/8-NYL	100	3/8-16	2	3/8	3/8
IL84-6BX5/8-NYL	100	3/8-16	2	5/8	3/8
IL84-6BX7/8-NYL	100	3/8-16	2	7/8	3/8
IL84-6BX1-NYL	100	3/8-16	2	1	3/8
IL84-6BX1-3/8-NYL	100	3/8-16	2	1-3/8	3/8
IL84-6BX1-7/8-NYL	100	3/8-16	2	1-7/8	3/8
IL84-6BX2-3/8-NYL	100	3/8-16	2	2-3/8	3/8
IL86-4BX3/8-NYL	50	1/4-20	2-1/2	3/8	3/8
IL86-4BX1/2-NYL	50	1/4-20	2-1/2	1/2	3/8
IL86-4BX5/8-NYL	50	1/4-20	2-1/2	5/8	3/8
IL86-4BX7/8-NYL	50	1/4-20	2-1/2	7/8	3/8
IL86-4BX1-NYL	50	1/4-20	2-1/2	1	3/8
IL86-4BX1-3/8-NYL	50	1/4-20	2-1/2	1-3/8	3/8
IL86-4BX1-7/8-NYL	50	1/4-20	2-1/2	1-7/8	3/8
IL86-5BX3/8-NYL	75	5/16-18	2-1/2	3/8	3/8
IL86-5BX5/8-NYL	75	5/16-18	2-1/2	5/8	3/8
IL86-5BX7/8-NYL	75	5/16-18	2-1/2	7/8	3/8
IL86-5BX1-NYL	75	5/16-18	2-1/2	1	3/8
IL86-5BX1-3/8-NYL	75	5/16-18	2-1/2	1-3/8*	3/8
IL86-5BX1-7/8-NYL	75	5/16-18	2-1/2	1-7/8*	3/8
IL86-5BX2-3/8-NYL	75	5/16-18	2-1/2	2-3/8*	3/8
IL86-6BX3/8-NYL	100	3/8-16	2-1/2	3/8	3/8
IL86-6BX5/8-NYL	100	3/8-16	2-1/2	5/8	3/8
IL86-6BX7/8-NYL	100	3/8-16	2-1/2	7/8	3/8
IL88-6BX1-NYL	100	3/8-16	2-1/2	1	3/8
IL86-6BX1-3/8-NYL	100	3/8-16	2-1/2	1-3/8	3/8
IL86-6BX1-7/8-NYL	100	3/8-16	2-1/2	1-7/8	3/8
IL86-6BX2-3/8-NYL	100	3/8-16	2-1/2	2-3/8	3/8
IL88-4BX3/8-NYL	50	1/4-20	3	3/8	3/8
IL88-4BX1/2-NYL	50	1/4-20	3	1/2	3/8
IL88-4BX5/8-NYL	50	1/4-20	3	5/8	3/8
IL88-4BX7/8-NYL	50	1/4-20	3	7/8	3/8
IL88-4BX1-NYL	50	1/4-20	3	1	3/8
IL88-4BX1-3/8-NYL	50	1/4-20	3	1-3/8	3/8
IL88-4BX1-7/8-NYL	50	1/4-20	3	1-7/8	3/8
IL88-5BX3/8-NYL	75	5/16-18	3	3/8	3/8
IL88-5BX5/8-NYL	75	5/16-18	3	5/8	3/8
IL88-5BX7/8-NYL	75	5/16-18	3	7/8	3/8
IL88-5BX1-NYL	75	5/16-18	3	1	3/8
IL88-5BX1-3/8-NYL	75	5/16-18	3	1-3/8*	3/8
IL88-5BX1-7/8-NYL	75	5/16-18	3	1-7/8*	3/8
IL88-5BX2-3/8-NYL	75	5/16-18	3	2-3/8*	3/8
IL88-6BX3/8-NYL	100	3/8-16	3	3/8	3/8
IL88-6BX5/8-NYL	100	3/8-16	3	5/8	3/8
IL88-6BX7/8-NYL	100	3/8-16	3	7/8	3/8
IL88-6BX1-NYL	100	3/8-16	3	1	3/8
IL88-6BX1-3/8-NYL	100	3/8-16	3	1-3/8	3/8
IL88-6BX1-7/8-NYL	100	3/8-16	3	1-7/8	3/8
IL88-6BX2-3/8-NYL	100	3/8-16	3	2-3/8	3/8

* Partially threaded 1" length

PN (brass)	PN (hex nut)	PN(molded)	Thread	Base Dia.	Load (lbs.)
IL83-4B-BI	IL83-4B-HN	IL83-4B-MT	1/4-20	1-1/2	100
IL83-5B-BI	IL83-5B-HN	IL83-5B-MT	5/16-18	1-1/2	250
IL83-6B-BI	IL83-6B-HN	IL83-6B-MT	3/8-16	1-1/2	250
IL85-4B-BI	IL85-4B-HN	IL85-4B-MT	1/4-20	2	100
IL85-5B-BI	IL85-5B-HN	IL85-5B-MT	5/16-18	2	250
IL85-6B-BI	IL85-6B-HN	IL85-6B-MT	3/8-16	2	250
IL87-4B-BI	IL87-4B-HN	IL87-4B-MT	1/4-20	2-1/2	100
IL87-5B-BI	IL87-5B-HN	IL87-5B-MT	5/16-18	2-1/2	250
IL87-6B-BI	IL87-6B-HN	IL87-6B-MT	3/8-16	2-1/2	250
IL89-4B-BI	IL89-4B-HN	IL89-4B-MT	1/4-20	3	100
IL89-5B-BI	IL89-5B-HN	IL89-5B-MT	5/16-18	3	250
IL89-6B-BI	IL89-6B-HN	IL89-6B-MT	3/8-16	3	250

PN (PVC)	Thread	Base Dia.	Load (lbs.)
IL83-4B-HN-PVC	1/4-20	1-1/2	75
IL83-5B-HN-PVC	5/16-18	1-1/2	75
IL83-6B-HN-PVC	3/8-16	1-1/2	75



NOTES

[illegible]

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY LEVELERS

QUOTE REQUEST

Your Contact Information

NAME:	TITLE:
COMPANY:	E-MAIL:
STREET ADDRESS OR POB:	CITY:
STATE:	ZIP CODE:
PHONE:	FAX:

Standard Product Request

ITEM #	IEC PART NUMBER	DESCRIPTION	QUANTITY
1			
Comments:			
2			
Comments:			
3			
Comments:			
4			
Comments:			

CUSTOM or MODIFIED Product Request

SIMILAR TO IEC PN#: _____

BASE	STUD
DIAMETER:	LENGTH:
MATERIAL:	THREAD:
SWIVEL:	MATERIAL:
FINISH: ☐ Gold Iridite ☐ Black Chromate	
☐ Clear Chromate	

OPTIONAL FEATURES

☐ TOP-A-JUST:	☐ INTERNAL BROACH:
☐ NON-SKID PAD:	☐ HEX HEAD:
☐ LAG HOLES:	☐ SQUARE HEAD:
☐ HEAT TREATED STUD:	☐ TOP SLOT:
QUANTITY REQUESTED:	EST ANNUAL USAGE:
Comments / Special Instructions:	

PLEASE FAX THIS FORM TO: 562-498-2275

Warranty & Disclaimer

IEC warrants each product against defects in workmanship and material for 90 days from the date of delivery to the user. The warranty is limited to the repair or replacement of any part(s) which are found by IEC to be defective and does not apply to ordinary wear tear, abuse, misapplications and altered products.

All data, dimensions and tables have been thoroughly checked but we can not assume liability for any possible errors or omissions. If you find an error, please notify us so we can correct it for future editions. We reserve the right to change designs and/or specifications without notice. In the event of a change, every attempt will be made to notify the current users.

© Copyright 2020. International Equipment Components, Inc. All rights reserved.

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

HEAVY-DUTY LEVELERS



ANY THUNDER ... ANY CLIMATE ... ANY LOAD

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

MEDIUM-DUTY LEVELERS



ANY THUNDER ... ANY CLIMATE ... ANY LOAD

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

LIGHT-DUTY LEVELERS



ANY THUNDER ... ANY CLIMATE ... ANY LOAD

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

METRIC LEVELERS



ANY THUNDER ... ANY CLIMATE ... ANY LOAD

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.

2201 E. Willow Street, D-104,

Signal Hill, CA 90755

Email: sales@iec-corp.com

Phone: 562-597-4533

Fax: 562-498-2275

Web: www.iec-corp.com

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

KNOB & HANDLE




**CLAMP
ADJUST
STABILIZE
FASTEN**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

CAP & PLUG PRODUCTS

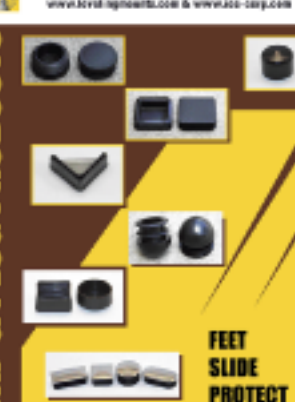

**FEET
SLIDE
PROTECT
FINISH**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

SURFACE PROTECTION
SLIDERS, GRIPPERS & FEET



**CUSHION
QUIET
SLIDE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelcomponents.com & www.iec-corp.com

LEG & CASTER PRODUCTS



**LEVEL
EXTEND
SUPPORT
ROLL**

Ph. 562.597.4533