



## NYLON SWIVEL SOCKET LEVELERS – with Rubber Pad

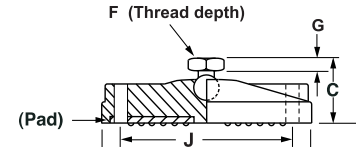

The IEC Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



1" to 10" Base Diameters

| Steel                                               | Stainless     | Load | A       | B     | C      | D     | F     | G     | H   | J   |
|-----------------------------------------------------|---------------|------|---------|-------|--------|-------|-------|-------|-----|-----|
| <b>Nylon Swivel Socket Levelers—with Rubber Pad</b> |               |      |         |       |        |       |       |       |     |     |
| IL91-4G-P                                           | IL91-4S-P     | 100  | 1/4-20  | 1/2   | 1      | 1     | 3/8   | 3/16  | -   | -   |
| IL91-5G-P                                           | IL91-5S-P     | 500  | 5/16-18 | 1/2   | 1      | 1     | 3/8   | 3/16  | -   | -   |
| IL91-6G-P                                           | IL91-6S-P     | 2000 | 3/8-16  | 1/2   | 1      | 1     | 3/8   | 3/16  | -   | -   |
| IL91-7G-P                                           | IL91-7S-P     | 2000 | 1/2-13  | 5/8   | 1-5/16 | 1     | 3/8   | 1/2   | -   | -   |
| IL91-8G-P                                           | IL91-8S-P     | 2000 | 5/8-11  | 3/4   | 1-7/16 | 1     | 1/2   | 5/8   | -   | -   |
| IL91-9G-P                                           | IL91-9S-P     | 2000 | 3/4-10  | 1     | 1-5/8  | 1     | 5/8   | 11/16 | -   | -   |
| IL91-10G-P                                          | IL91-10S-P    | 2000 | 1-8     | 1 1/4 | 1-7/8  | 1     | 11/16 | 3/4   | -   | -   |
| IL93-4G-P                                           | IL93-4S-P     | 100  | 1/4-20  | 1/2   | 1      | 1 1/2 | 3/8   | 3/16  | -   | -   |
| IL93-5G-P                                           | IL93-5S-P     | 500  | 5/16-18 | 1/2   | 1      | 1 1/2 | 3/8   | 3/16  | -   | -   |
| IL93-6G-P                                           | IL93-6S-P     | 2000 | 3/8-16  | 1/2   | 1      | 1 1/2 | 3/8   | 3/16  | -   | -   |
| IL93-7G-P                                           | IL93-7S-P     | 2000 | 1/2-13  | 5/8   | 1-5/16 | 1 1/2 | 3/8   | 1/2   | -   | -   |
| IL93-8G-P                                           | IL93-8S-P     | 2000 | 5/8-11  | 3/4   | 1-7/16 | 1 1/2 | 1/2   | 5/8   | -   | -   |
| IL93-9G-P                                           | IL93-9S-P     | 2000 | 3/4-10  | 1     | 1-5/8  | 1 1/2 | 5/8   | 11/16 | -   | -   |
| IL93-10G-P                                          | IL93-10S-P    | 2000 | 1-8     | 1 1/4 | 1-7/8  | 1 1/2 | 11/16 | 3/4   | -   | -   |
| IL95-4G-P                                           | IL95-4S-P     | 100  | 1/4-20  | 1/2   | 1      | 2 3/8 | 3/8   | 3/16  | -   | -   |
| IL95-5G-P                                           | IL95-5S-P     | 500  | 5/16-18 | 1/2   | 1      | 2 3/8 | 3/8   | 3/16  | -   | -   |
| IL95-6G-P                                           | IL95-6S-P     | 2500 | 3/8-16  | 1/2   | 1      | 2 3/8 | 3/8   | 3/16  | -   | -   |
| IL95-7G-P                                           | IL95-7S-P     | 2500 | 1/2-13  | 5/8   | 1-5/16 | 2 3/8 | 3/8   | 1/2   | -   | -   |
| IL95-8G-P                                           | IL95-8S-P     | 2500 | 5/8-11  | 3/4   | 1-7/16 | 2 3/8 | 1/2   | 5/8   | -   | -   |
| IL95-9G-P                                           | IL95-9S-P     | 2500 | 3/4-10  | 1     | 1-5/8  | 2 3/8 | 5/8   | 11/16 | -   | -   |
| IL95-10G-P                                          | IL95-10S-P    | 2500 | 1-8     | 1 1/4 | 1-7/8  | 2 3/8 | 11/16 | 3/4   | -   | -   |
| IL97-4G-H-P                                         | IL97-4S-H-P   | 100  | 1/4-20  | 1/2   | 1      | 3 1/8 | 3/8   | 3/16  | .39 | 2.2 |
| IL97-5G-H-P                                         | IL97-5S-H-P   | 500  | 5/16-18 | 1/2   | 1      | 3 1/8 | 3/8   | 3/16  | .39 | 2.2 |
| IL97-6G-H-P                                         | IL97-6S-H-P   | 3000 | 3/8-16  | 1/2   | 1      | 3 1/8 | 3/8   | 3/16  | .39 | 2.2 |
| IL97-7G-H-P                                         | IL97-7S-H-P   | 3000 | 1/2-13  | 5/8   | 1-5/16 | 3 1/8 | 3/8   | 1/2   | .39 | 2.2 |
| IL97-8G-H-P                                         | IL97-8S-H-P   | 3000 | 5/8-11  | 3/4   | 1-7/16 | 3 1/8 | 1/2   | 5/8   | .39 | 2.2 |
| IL97-9G-H-P                                         | IL97-9S-H-P   | 3000 | 3/4-10  | 1     | 1-5/8  | 3 1/8 | 5/8   | 11/16 | .39 | 2.2 |
| IL97-10G-H-P                                        | IL97-10S-H-P  | 3000 | 1-8     | 1 1/4 | 1-7/8  | 3 1/8 | 11/16 | 3/4   | .39 | 2.2 |
| IL99-4G-H-P                                         | IL99-4S-H-P   | 100  | 1/4-20  | 1/2   | 1-1/4  | 4     | 3/8   | 3/16  | .51 | 2.9 |
| IL99-5G-H-P                                         | IL99-5S-H-P   | 500  | 5/16-18 | 1/2   | 1-1/4  | 4     | 3/8   | 3/16  | .51 | 2.9 |
| IL99-6G-H-P                                         | IL99-6S-H-P   | 3000 | 3/8-16  | 1/2   | 1-1/4  | 4     | 3/8   | 3/16  | .51 | 2.9 |
| IL99-7G-H-P                                         | IL99-7S-H-P   | 3000 | 1/2-13  | 5/8   | 1-1/2  | 4     | 3/8   | 1/2   | .51 | 2.9 |
| IL99-8G-H-P                                         | IL99-8S-H-P   | 3000 | 5/8-11  | 3/4   | 1-5/8  | 4     | 1/2   | 5/8   | .51 | 2.9 |
| IL99-9G-H-P                                         | IL99-9S-H-P   | 3000 | 3/4-10  | 1     | 1-7/8  | 4     | 5/8   | 11/16 | .51 | 2.9 |
| IL99-10G-H-P                                        | IL99-10S-H-P  | 3000 | 1-8     | 1 1/4 | 2-1/8  | 4     | 11/16 | 3/4   | .51 | 2.9 |
| IL99A-4G-H-P                                        | IL99A-4S-H-P  | 100  | 1/4-20  | 1/2   | 1-1/4  | 6     | 3/8   | 3/16  | .51 | 4.9 |
| IL99A-5G-H-P                                        | IL99A-5S-H-P  | 500  | 5/16-18 | 1/2   | 1-1/4  | 6     | 3/8   | 3/16  | .51 | 4.9 |
| IL99A-6G-H-P                                        | IL99A-6S-H-P  | 3000 | 3/8-16  | 1/2   | 1-1/4  | 6     | 3/8   | 3/16  | .51 | 4.9 |
| IL99A-7G-H-P                                        | IL99A-7S-H-P  | 3000 | 1/2-13  | 5/8   | 1-1/2  | 6     | 3/8   | 1/2   | .51 | 4.9 |
| IL99A-8G-H-P                                        | IL99A-8S-H-P  | 3000 | 5/8-11  | 3/4   | 1-5/8  | 6     | 1/2   | 5/8   | .51 | 4.9 |
| IL99A-9G-H-P                                        | IL99A-9S-H-P  | 3000 | 3/4-10  | 1     | 1-7/8  | 6     | 5/8   | 11/16 | .51 | 4.9 |
| IL99A-10G-H-P                                       | IL99A-10S-H-P | 3000 | 1-8     | 1 1/4 | 2-1/8  | 6     | 11/16 | 3/4   | .51 | 4.9 |
| IL99B-4G-H-P                                        | IL99B-4S-H-P  | 100  | 1/4-20  | 1/2   | 1-1/4  | 8     | 3/8   | 3/16  | .51 | 6.9 |
| IL99B-5G-H-P                                        | IL99B-5S-H-P  | 500  | 5/16-18 | 1/2   | 1-1/4  | 8     | 3/8   | 3/16  | .51 | 6.9 |
| IL99B-6G-H-P                                        | IL99B-6S-H-P  | 3000 | 3/8-16  | 1/2   | 1-1/4  | 8     | 3/8   | 3/16  | .51 | 6.9 |
| IL99B-7G-H-P                                        | IL99B-7S-H-P  | 3000 | 1/2-13  | 5/8   | 1-1/2  | 8     | 3/8   | 1/2   | .51 | 6.9 |
| IL99B-8G-H-P                                        | IL99B-8S-H-P  | 3000 | 5/8-11  | 3/4   | 1-5/8  | 8     | 1/2   | 5/8   | .51 | 6.9 |
| IL99B-9G-H-P                                        | IL99B-9S-H-P  | 3000 | 3/4-10  | 1     | 1-7/8  | 8     | 5/8   | 11/16 | .51 | 6.9 |
| IL99B-10G-H-P                                       | IL99B-10S-H-P | 3000 | 1-8     | 1 1/4 | 2-1/8  | 8     | 11/16 | 3/4   | .51 | 6.9 |
| IL98C-4G-H-P                                        | IL98C-4S-H-P  | 100  | 1/4-20  | 1/2   | 1-1/4  | 10    | 3/8   | 3/16  | .51 | 8.9 |
| IL98C-5G-H-P                                        | IL98C-5S-H-P  | 500  | 5/16-18 | 1/2   | 1-1/4  | 10    | 3/8   | 3/16  | .51 | 8.9 |
| IL98C-6G-H-P                                        | IL98C-6S-H-P  | 3000 | 3/8-16  | 1/2   | 1-1/4  | 10    | 3/8   | 3/16  | .51 | 8.9 |
| IL98C-7G-H-P                                        | IL98C-7S-H-P  | 3000 | 1/2-13  | 5/8   | 1-1/2  | 10    | 3/8   | 1/2   | .51 | 8.9 |
| IL98C-8G-H-P                                        | IL98C-8S-H-P  | 3000 | 5/8-11  | 3/4   | 1-5/8  | 10    | 1/2   | 5/8   | .51 | 8.9 |
| IL98C-9G-H-P                                        | IL98C-9S-H-P  | 3000 | 3/4-10  | 1     | 1-7/8  | 10    | 5/8   | 11/16 | .51 | 8.9 |
| IL98C-10G-H-P                                       | IL98C-10S-H-P | 3000 | 1-8     | 1 1/4 | 2-1/8  | 10    | 11/16 | 3/4   | .51 | 8.9 |

"-H" denotes two lag holes in base Note: "F" column values represent thread depth

To order without rubber pad, remove "-P." To order without lag holes, remove "-H."



## NYLON SWIVEL METRIC SOCKET STYLE

### LEVELERS – with Rubber Pad

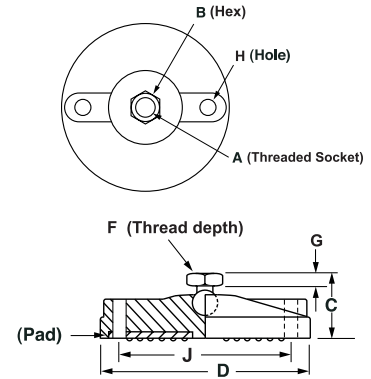
The IEC Metric Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

#### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

#### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



#### Metric Threads : 1" to 10" Base Diameters

| Steel                                               | Stainless      | Load | A        | B     | C      | D     | F     | G     | H   | J   |
|-----------------------------------------------------|----------------|------|----------|-------|--------|-------|-------|-------|-----|-----|
| <b>Nylon Swivel Socket Levelers-with Rubber Pad</b> |                |      |          |       |        |       |       |       |     |     |
| IL91-M6G-P                                          | IL91-M6S-P     | 100  | M6X1     | 1/2   | 1      | 1     | 3/8   | 3/16  | -   | -   |
| IL91-M8G-P                                          | IL91-M8S-P     | 500  | M8X1.25  | 1/2   | 1      | 1     | 3/8   | 3/16  | -   | -   |
| IL91-M10G-P                                         | IL91-M10S-P    | 2000 | M10X1.50 | 1/2   | 1      | 1     | 3/8   | 3/16  | -   | -   |
| IL91-M12G-P                                         | IL91-M12S-P    | 2000 | M12X1.75 | 5/8   | 1-5/16 | 1     | 3/8   | 1/2   | -   | -   |
| IL91-M16G-P                                         | IL91-M16S-P    | 2000 | M16X2.00 | 3/4   | 1-7/16 | 1     | 1/2   | 5/8   | -   | -   |
| IL91-M20G-P                                         | IL91-M20S-P    | 2000 | M20X2.50 | 1     | 1-5/8  | 1     | 5/8   | 11/16 | -   | -   |
| IL91-M24G-P                                         | IL91-M24S-P    | 2000 | M24X3.00 | 1 1/4 | 1-7/8  | 1     | 11/16 | 3/4   | -   | -   |
| IL93-M6G-P                                          | IL93-M6S-P     | 100  | M6X1     | 1/2   | 1      | 1 1/2 | 3/8   | 3/16  | -   | -   |
| IL93-M8G-P                                          | IL93-M8S-P     | 500  | M8X1.25  | 1/2   | 1      | 1 1/2 | 3/8   | 3/16  | -   | -   |
| IL93-M10G-P                                         | IL93-M10S-P    | 2000 | M10X1.50 | 1/2   | 1      | 1 1/2 | 3/8   | 3/16  | -   | -   |
| IL93-M12G-P                                         | IL93-M12S-P    | 2000 | M12X1.75 | 5/8   | 1-5/16 | 1 1/2 | 3/8   | 1/2   | -   | -   |
| IL93-M16G-P                                         | IL93-M16S-P    | 2000 | M16X2.00 | 3/4   | 1-7/16 | 1 1/2 | 1/2   | 5/8   | -   | -   |
| IL93-M20G-P                                         | IL93-M20S-P    | 2000 | M20X2.50 | 1     | 1-5/8  | 1 1/2 | 5/8   | 11/16 | -   | -   |
| IL93-M24G-P                                         | IL93-M24S-P    | 2000 | M24X3.00 | 1 1/4 | 1-7/8  | 1 1/2 | 11/16 | 3/4   | -   | -   |
| IL95-M6G-P                                          | IL95-M6S-P     | 100  | M6X1     | 1/2   | 1      | 2 3/8 | 3/8   | 3/16  | -   | -   |
| IL95-M8G-P                                          | IL95-M8S-P     | 500  | M8X1.25  | 1/2   | 1      | 2 3/8 | 3/8   | 3/16  | -   | -   |
| IL95-M10G-P                                         | IL95-M10S-P    | 2500 | M10X1.50 | 1/2   | 1      | 2 3/8 | 3/8   | 3/16  | -   | -   |
| IL95-M12G-P                                         | IL95-M12S-P    | 2500 | M12X1.75 | 5/8   | 1-5/16 | 2 3/8 | 3/8   | 1/2   | -   | -   |
| IL95-M16G-P                                         | IL95-M16S-P    | 2500 | M16X2.00 | 3/4   | 1-7/16 | 2 3/8 | 1/2   | 5/8   | -   | -   |
| IL95-M20G-P                                         | IL95-M20S-P    | 2500 | M20X2.50 | 1     | 1-5/8  | 2 3/8 | 5/8   | 11/16 | -   | -   |
| IL95-M24G-P                                         | IL95-M24S-P    | 2500 | M24X3.00 | 1 1/4 | 1-7/8  | 2 3/8 | 11/16 | 3/4   | -   | -   |
| IL97-M6G-H-P                                        | IL97-M6S-H-P   | 100  | M6X1     | 1/2   | 1      | 3 1/8 | 3/8   | 3/16  | .39 | 2.2 |
| IL97-M8G-H-P                                        | IL97-M8S-H-P   | 500  | M8X1.25  | 1/2   | 1      | 3 1/8 | 3/8   | 3/16  | .39 | 2.2 |
| IL97-M10G-H-P                                       | IL97-M10S-H-P  | 3000 | M10X1.50 | 1/2   | 1      | 3 1/8 | 3/8   | 3/16  | .39 | 2.2 |
| IL97-M12G-H-P                                       | IL97-M12S-H-P  | 3000 | M12X1.75 | 5/8   | 1-5/16 | 3 1/8 | 3/8   | 1/2   | .39 | 2.2 |
| IL97-M16G-H-P                                       | IL97-M16S-H-P  | 3000 | M16X2.00 | 3/4   | 1-7/16 | 3 1/8 | 1/2   | 5/8   | .39 | 2.2 |
| IL97-M20G-H-P                                       | IL97-M20S-H-P  | 3000 | M20X2.50 | 1     | 1-5/8  | 3 1/8 | 5/8   | 11/16 | .39 | 2.2 |
| IL97-M24G-H-P                                       | IL97-M24S-H-P  | 3000 | M24X3.00 | 1 1/4 | 1-7/8  | 3 1/8 | 11/16 | 3/4   | .39 | 2.2 |
| IL99-M6G-H-P                                        | IL99-M6S-H-P   | 100  | M6X1     | 1/2   | 1-1/4  | 4     | 3/8   | 3/16  | .51 | 2.9 |
| IL99-M8G-H-P                                        | IL99-M8S-H-P   | 500  | M8X1.25  | 1/2   | 1-1/4  | 4     | 3/8   | 3/16  | .51 | 2.9 |
| IL99-M10G-H-P                                       | IL99-M10S-H-P  | 3000 | M10X1.50 | 1/2   | 1-1/4  | 4     | 3/8   | 3/16  | .51 | 2.9 |
| IL99-M12G-H-P                                       | IL99-M12S-H-P  | 3000 | M12X1.75 | 5/8   | 1-1/2  | 4     | 3/8   | 1/2   | .51 | 2.9 |
| IL99-M16G-H-P                                       | IL99-M16S-H-P  | 3000 | M16X2.00 | 3/4   | 1-5/8  | 4     | 1/2   | 5/8   | .51 | 2.9 |
| IL99-M20G-H-P                                       | IL99-M20S-H-P  | 3000 | M20X2.50 | 1     | 1-7/8  | 4     | 5/8   | 11/16 | .51 | 2.9 |
| IL99-M24G-H-P                                       | IL99-M24S-H-P  | 3000 | M24X3.00 | 1 1/4 | 2-1/8  | 4     | 11/16 | 3/4   | .51 | 2.9 |
| IL99A-M6G-H-P                                       | IL99A-M6S-H-P  | 100  | M6X1     | 1/2   | 1-1/4  | 6     | 3/8   | 3/16  | .51 | 4.9 |
| IL99A-M8G-H-P                                       | IL99A-M8S-H-P  | 500  | M8X1.25  | 1/2   | 1-1/4  | 6     | 3/8   | 3/16  | .51 | 4.9 |
| IL99A-M10G-H-P                                      | IL99A-M10S-H-P | 3000 | M10X1.50 | 1/2   | 1-1/4  | 6     | 3/8   | 3/16  | .51 | 4.9 |
| IL99A-M12G-H-P                                      | IL99A-M12S-H-P | 3000 | M12X1.75 | 5/8   | 1-1/2  | 6     | 3/8   | 1/2   | .51 | 4.9 |
| IL99A-M16G-H-P                                      | IL99A-M16S-H-P | 3000 | M16X2.00 | 3/4   | 1-5/8  | 6     | 1/2   | 5/8   | .51 | 4.9 |
| IL99A-M20G-H-P                                      | IL99A-M20S-H-P | 3000 | M20X2.50 | 1     | 1-7/8  | 6     | 5/8   | 11/16 | .51 | 4.9 |
| IL99A-M24G-H-P                                      | IL99A-M24S-H-P | 3000 | M24X3.00 | 1 1/4 | 2-1/8  | 6     | 11/16 | 3/4   | .51 | 4.9 |
| IL99B-M6G-H-P                                       | IL99B-M6S-H-P  | 100  | M6X1     | 1/2   | 1-1/4  | 8     | 3/8   | 3/16  | .51 | 6.9 |
| IL99B-M8G-H-P                                       | IL99B-M8S-H-P  | 500  | M8X1.25  | 1/2   | 1-1/4  | 8     | 3/8   | 3/16  | .51 | 6.9 |
| IL99B-M10G-H-P                                      | IL99B-M10S-H-P | 3000 | M10X1.50 | 1/2   | 1-1/4  | 8     | 3/8   | 3/16  | .51 | 6.9 |
| IL99B-M12G-H-P                                      | IL99B-M12S-H-P | 3000 | M12X1.75 | 5/8   | 1-1/2  | 8     | 3/8   | 1/2   | .51 | 6.9 |
| IL99B-M16G-H-P                                      | IL99B-M16S-H-P | 3000 | M16X2.00 | 3/4   | 1-5/8  | 8     | 1/2   | 5/8   | .51 | 6.9 |
| IL99B-M20G-H-P                                      | IL99B-M20S-H-P | 3000 | M20X2.50 | 1     | 1-7/8  | 8     | 5/8   | 11/16 | .51 | 6.9 |
| IL99B-M24G-H-P                                      | IL99B-M24S-H-P | 3000 | M24X3.00 | 1 1/4 | 2-1/8  | 8     | 11/16 | 3/4   | .51 | 6.9 |
| IL99C-M6G-H-P                                       | IL99C-M6S-H-P  | 100  | M6X1     | 1/2   | 1-1/4  | 10    | 3/8   | 3/16  | .51 | 8.9 |
| IL99C-M8G-H-P                                       | IL99C-M8S-H-P  | 500  | M8X1.25  | 1/2   | 1-1/4  | 10    | 3/8   | 3/16  | .51 | 8.9 |
| IL99C-M10G-H-P                                      | IL99C-M10S-H-P | 3000 | M10X1.50 | 1/2   | 1-1/4  | 10    | 3/8   | 3/16  | .51 | 8.9 |
| IL99C-M12G-H-P                                      | IL99C-M12S-H-P | 3000 | M12X1.75 | 5/8   | 1-1/2  | 10    | 3/8   | 1/2   | .51 | 8.9 |
| IL99C-M16G-H-P                                      | IL99C-M16S-H-P | 3000 | M16X2.00 | 3/4   | 1-5/8  | 10    | 1/2   | 5/8   | .51 | 8.9 |
| IL99C-M20G-H-P                                      | IL99C-M20S-H-P | 3000 | M20X2.50 | 1     | 1-7/8  | 10    | 5/8   | 11/16 | .51 | 8.9 |
| IL99C-M24G-H-P                                      | IL99C-M24S-H-P | 3000 | M24X3.00 | 1 1/4 | 2-1/8  | 10    | 11/16 | 3/4   | .51 | 8.9 |

"H" denotes two lag holes in base Note: "F" column values represent thread depth

To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL 1&amp;2 INCH STUD

**NYLON SWIVEL STUD LEVELERS – with Rubber Pad**

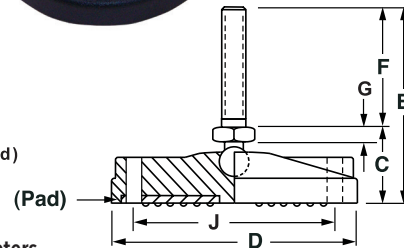
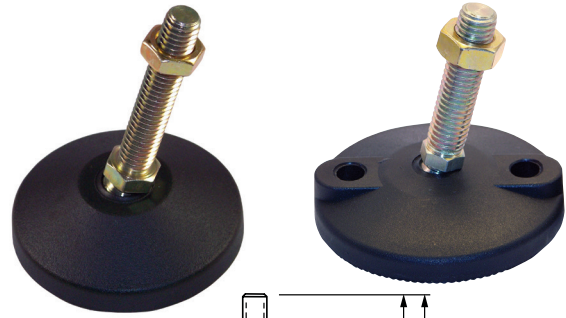
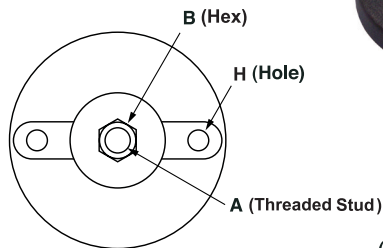

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**1" to 3-1/8" Base Diameters**

| Steel                                                    | Stainless     | Load | A       | B     | C     | D     | E     | F     | G    | H   | J   |
|----------------------------------------------------------|---------------|------|---------|-------|-------|-------|-------|-------|------|-----|-----|
| <b>Nylon Swivel Stud Levelers—2" Stud and Rubber Pad</b> |               |      |         |       |       |       |       |       |      |     |     |
| IL90-4Gx1-P                                              | IL90-4Sx1-P   | 100  | 1/4-20  | 1/2   | 1     | 1     | 2     | 1     | 3/16 | -   | -   |
| IL90-4Gx15-P                                             | IL90-4Sx15-P  | 100  | 1/4-20  | 1/2   | 1     | 1     | 2-1/2 | 1-1/2 | 3/16 | -   | -   |
| IL90-4G-P                                                | IL90-4S-P     | 100  | 1/4-20  | 1/2   | 1     | 1     | 3     | 2     | 3/16 | -   | -   |
| IL90-5Gx1-P                                              | IL90-5Sx1-P   | 500  | 5/16-18 | 1/2   | 1     | 1     | 2     | 1     | 3/16 | -   | -   |
| IL90-5G-P                                                | IL90-5S-P     | 500  | 5/16-18 | 1/2   | 1     | 1     | 3     | 2     | 3/16 | -   | -   |
| IL90-6G-P                                                | IL90-6S-P     | 2000 | 3/8-16  | 1/2   | 1     | 1     | 3     | 2     | 3/16 | -   | -   |
| IL90-7G-P                                                | IL90-7S-P     | 2000 | 1/2-13  | 1/2   | 1     | 1     | 3     | 2     | 3/16 | -   | -   |
| IL90-8G-P                                                | IL90-8S-P     | 2000 | 5/8-11  | 5/8   | 1     | 1     | 3     | 2     | 3/16 | -   | -   |
| IL90-9G-P                                                | IL90-9S-P     | 2000 | 3/4-10  | 3/4   | 1     | 1     | 3     | 2     | 3/16 | -   | -   |
| IL90-10G-P                                               | IL90-10S-P    | 2000 | 1-8     | 1     | 1-1/4 | 1     | 3-1/4 | 2     | 7/16 | -   | -   |
| IL90-12G-P                                               | IL90-12S-P    | 2000 | 1 1/4-7 | 1-1/4 | 1-1/4 | 1     | 3-1/4 | 2     | 7/16 | -   | -   |
| IL92-4Gx1-P                                              | IL92-4Sx1-P   | 100  | 1/4-20  | 1/2   | 1     | 1-1/2 | 2     | 1     | 3/16 | -   | -   |
| IL92-4Gx15-P                                             | IL92-4Sx15-P  | 100  | 1/4-20  | 1/2   | 1     | 1-1/2 | 2-1/2 | 1-1/2 | 3/16 | -   | -   |
| IL92-4G-P                                                | IL92-4S-P     | 100  | 1/4-20  | 1/2   | 1     | 1-1/2 | 3     | 2     | 3/16 | -   | -   |
| IL92-5Gx1-P                                              | IL92-5Sx1-P   | 500  | 5/16-18 | 1/2   | 1     | 1-1/2 | 2     | 1     | 3/16 | -   | -   |
| IL92-5G-P                                                | IL92-5S-P     | 500  | 5/16-18 | 1/2   | 1     | 1-1/2 | 3     | 2     | 3/16 | -   | -   |
| IL92-6G-P                                                | IL92-6S-P     | 2000 | 3/8-16  | 1/2   | 1     | 1-1/2 | 3     | 2     | 3/16 | -   | -   |
| IL92-7G-P                                                | IL92-7S-P     | 2000 | 1/2-13  | 1/2   | 1     | 1-1/2 | 3     | 2     | 3/16 | -   | -   |
| IL92-8G-P                                                | IL92-8S-P     | 2000 | 5/8-11  | 5/8   | 1     | 1-1/2 | 3     | 2     | 3/16 | -   | -   |
| IL92-9G-P                                                | IL92-9S-P     | 2000 | 3/4-10  | 3/4   | 1     | 1-1/2 | 3     | 2     | 3/16 | -   | -   |
| IL92-10G-P                                               | IL92-10S-P    | 2000 | 1-8     | 1     | 1-1/4 | 1-1/2 | 3-1/4 | 2     | 7/16 | -   | -   |
| IL92-12G-P                                               | IL92-12S-P    | 2000 | 1 1/4-7 | 1-1/4 | 1-1/4 | 1-1/2 | 3-1/4 | 2     | 7/16 | -   | -   |
| IL94-4Gx1-P                                              | IL94-4Sx1-P   | 100  | 1/4-20  | 1/2   | 1     | 2-3/8 | 2     | 1     | 3/16 | -   | -   |
| IL94-4Gx15-P                                             | IL94-4Sx15-P  | 100  | 1/4-20  | 1/2   | 1     | 2-3/8 | 2-1/2 | 1-1/2 | 3/16 | -   | -   |
| IL94-4G-P                                                | IL94-4S-P     | 100  | 1/4-20  | 1/2   | 1     | 2-3/8 | 3     | 2     | 3/16 | -   | -   |
| IL94-5Gx1-P                                              | IL94-5Sx1-P   | 500  | 5/16-18 | 1/2   | 1     | 2-3/8 | 2     | 1     | 3/16 | -   | -   |
| IL94-5G-P                                                | IL94-5S-P     | 500  | 5/16-18 | 1/2   | 1     | 2-3/8 | 3     | 2     | 3/16 | -   | -   |
| IL94-6G-P                                                | IL94-6S-P     | 2500 | 3/8-16  | 1/2   | 1     | 2-3/8 | 3     | 2     | 3/16 | -   | -   |
| IL94-7G-P                                                | IL94-7S-P     | 2500 | 1/2-13  | 1/2   | 1     | 2-3/8 | 3     | 2     | 3/16 | -   | -   |
| IL94-8G-P                                                | IL94-8S-P     | 2500 | 5/8-11  | 5/8   | 1     | 2-3/8 | 3     | 2     | 3/16 | -   | -   |
| IL94-9G-P                                                | IL94-9S-P     | 2500 | 3/4-10  | 3/4   | 1     | 2-3/8 | 3     | 2     | 3/16 | -   | -   |
| IL94-10G-P                                               | IL94-10S-P    | 2500 | 1-8     | 1     | 1-1/4 | 2-3/8 | 3 1/4 | 2     | 7/16 | -   | -   |
| IL94-12G-P                                               | IL94-12S-P    | 2500 | 1 1/4-7 | 1-1/4 | 1-1/4 | 2-3/8 | 3 1/4 | 2     | 7/16 | -   | -   |
| IL96-4Gx1-H-P                                            | IL96-4Sx1-H-P | 100  | 1/4-20  | 1/2   | 1     | 3-1/8 | 2     | 1     | 3/16 | .39 | 2.2 |
| IL96-4Gx15-P                                             | IL96-4Sx15-P  | 100  | 1/4-20  | 1/2   | 1     | 3-1/8 | 2-1/2 | 1-1/2 | 3/16 | .39 | 2.2 |
| IL96-4G-H-P                                              | IL96-4S-H-P   | 100  | 1/4-20  | 1/2   | 1     | 3-1/8 | 3     | 2     | 3/16 | .39 | 2.2 |
| IL96-5Gx1-P                                              | IL96-5Sx1-P   | 500  | 5/16-18 | 1/2   | 1     | 3-1/8 | 2     | 1     | 3/16 | .39 | 2.2 |
| IL96-5G-H-P                                              | IL96-5S-H-P   | 500  | 5/16-18 | 1/2   | 1     | 3-1/8 | 3     | 2     | 3/16 | .39 | 2.2 |
| IL96-6G-H-P                                              | IL96-6S-H-P   | 3000 | 3/8-16  | 1/2   | 1     | 3-1/8 | 3     | 2     | 3/16 | .39 | 2.2 |
| IL96-7G-H-P                                              | IL96-7S-H-P   | 3000 | 1/2-13  | 1/2   | 1     | 3-1/8 | 3     | 2     | 3/16 | .39 | 2.2 |
| IL96-8G-H-P                                              | IL96-8S-H-P   | 3000 | 5/8-11  | 5/8   | 1     | 3-1/8 | 3     | 2     | 3/16 | .39 | 2.2 |
| IL96-9G-H-P                                              | IL96-9S-H-P   | 3000 | 3/4-10  | 3/4   | 1     | 3-1/8 | 3     | 2     | 3/16 | .39 | 2.2 |
| IL96-10G-H-P                                             | IL96-10S-H-P  | 3000 | 1-8     | 1     | 1-1/4 | 3-1/8 | 3-1/4 | 2     | 7/16 | .39 | 2.2 |
| IL96-12G-H-P                                             | IL96-12S-H-P  | 3000 | 1 1/4-7 | 1-1/4 | 1-1/4 | 3-1/8 | 3-1/4 | 2     | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."  
To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS****NYLON SWIVEL 1&2 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**

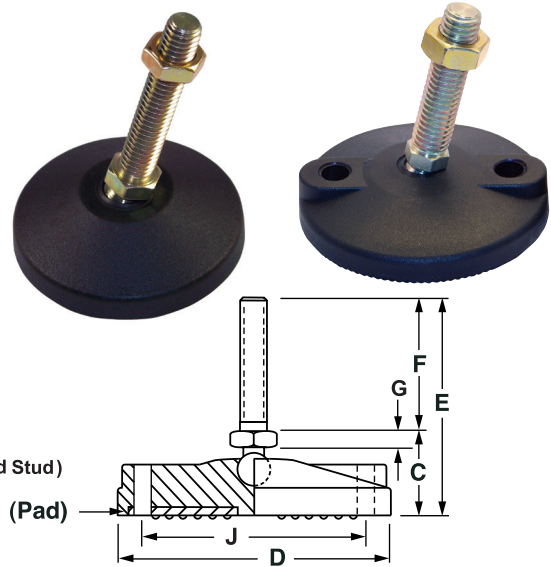
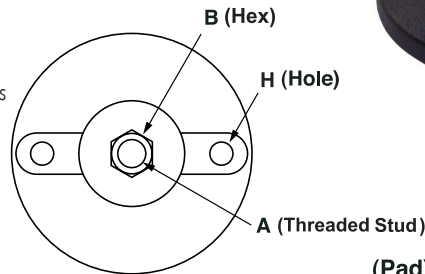

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless      | Load | A       | B     | C     | D  | E     | F     | G    | H   | J   |
|----------------------------------------------------------|----------------|------|---------|-------|-------|----|-------|-------|------|-----|-----|
| <b>Nylon Swivel Stud Levelers—2" Stud and Rubber Pad</b> |                |      |         |       |       |    |       |       |      |     |     |
| IL98-4Gx1-H-P                                            | IL98-4Sx1-H-P  | 100  | 1/4-20  | 1/2   | 1-1/4 | 4  | 2-1/4 | 1     | 3/16 | .51 | 2.9 |
| IL98-4Gx15-P                                             | IL98-4Sx15-P   | 100  | 1/4-20  | 1/2   | 1-1/4 | 4  | 2-3/4 | 1-1/2 | 3/16 | .51 | 2.9 |
| IL98-4G-H-P                                              | IL98-4S-H-P    | 100  | 1/4-20  | 1/2   | 1-1/4 | 4  | 3-1/4 | 2     | 3/16 | .51 | 2.9 |
| IL98-5Gx1-P                                              | IL98-5Sx1-P    | 500  | 5/16-18 | 1/2   | 1-1/4 | 4  | 2-1/4 | 1     | 3/16 | .51 | 2.9 |
| IL98-5G-H-P                                              | IL98-5S-H-P    | 500  | 5/16-18 | 1/2   | 1-1/4 | 4  | 3-1/4 | 2     | 3/16 | .51 | 2.9 |
| IL98-6G-H-P                                              | IL98-6S-H-P    | 3000 | 3/8-16  | 1/2   | 1-1/4 | 4  | 3-1/4 | 2     | 3/16 | .51 | 2.9 |
| IL98-7G-H-P                                              | IL98-7S-H-P    | 3000 | 1/2-13  | 1/2   | 1-1/4 | 4  | 3-1/4 | 2     | 3/16 | .51 | 2.9 |
| IL98-8G-H-P                                              | IL98-8S-H-P    | 3000 | 5/8-11  | 5/8   | 1-1/4 | 4  | 3-1/4 | 2     | 3/16 | .51 | 2.9 |
| IL98-9G-H-P                                              | IL98-9S-H-P    | 3000 | 3/4-10  | 3/4   | 1-1/4 | 4  | 3-1/4 | 2     | 3/16 | .51 | 2.9 |
| IL98-10G-H-P                                             | IL98-10S-H-P   | 3000 | 1-8     | 1     | 1-1/2 | 4  | 3-1/2 | 2     | 7/16 | .51 | 2.9 |
| IL98-12G-H-P                                             | IL98-12S-H-P   | 3000 | 1 1/4-7 | 1-1/4 | 1-1/2 | 4  | 3-1/2 | 2     | 7/16 | .51 | 2.9 |
| IL98A-4Gx1-H-P                                           | IL98A-4Sx1-H-P | 100  | 1/4-20  | 1/2   | 1-1/4 | 6  | 2-1/4 | 1     | 3/16 | .51 | 4.9 |
| IL98A-4Gx15-P                                            | IL98A-4Sx15-P  | 100  | 1/4-20  | 1/2   | 1-1/4 | 6  | 2-3/4 | 1-1/2 | 3/16 | .51 | 4.9 |
| IL98A-4G-H-P                                             | IL98A-4S-H-P   | 100  | 1/4-20  | 1/2   | 1-1/4 | 6  | 3-1/4 | 2     | 3/16 | .51 | 4.9 |
| IL98A-5Gx1-P                                             | IL98A-5Sx1-P   | 500  | 5/16-18 | 1/2   | 1-1/4 | 6  | 2-1/4 | 1     | 3/16 | .51 | 4.9 |
| IL98A-5G-H-P                                             | IL98A-5S-H-P   | 500  | 5/16-18 | 1/2   | 1-1/4 | 6  | 3-1/4 | 2     | 3/16 | .51 | 4.9 |
| IL98A-6G-H-P                                             | IL98A-6S-H-P   | 3000 | 3/8-16  | 1/2   | 1-1/4 | 6  | 3-1/4 | 2     | 3/16 | .51 | 4.9 |
| IL98A-7G-H-P                                             | IL98A-7S-H-P   | 3000 | 1/2-13  | 1/2   | 1-1/4 | 6  | 3-1/4 | 2     | 3/16 | .51 | 4.9 |
| IL98A-8G-H-P                                             | IL98A-8S-H-P   | 3000 | 5/8-11  | 5/8   | 1-1/4 | 6  | 3-1/4 | 2     | 3/16 | .51 | 4.9 |
| IL98A-9G-H-P                                             | IL98A-9S-H-P   | 3000 | 3/4-10  | 3/4   | 1-1/4 | 6  | 3-1/4 | 2     | 3/16 | .51 | 4.9 |
| IL98A-10G-H-P                                            | IL98A-10S-H-P  | 3000 | 1-8     | 1     | 1-1/2 | 6  | 3-1/2 | 2     | 7/16 | .51 | 4.9 |
| IL98A-12G-H-P                                            | IL98A-12S-H-P  | 3000 | 1 1/4-7 | 1-1/4 | 1-1/2 | 6  | 3-1/2 | 2     | 7/16 | .51 | 4.9 |
| IL98B-4Gx1-H-P                                           | IL98B-4Sx1-H-P | 100  | 1/4-20  | 1/2   | 1-1/4 | 8  | 2-1/4 | 1     | 3/16 | .51 | 6.9 |
| IL98B-4Gx15-P                                            | IL98B-4Sx15-P  | 100  | 1/4-20  | 1/2   | 1-1/4 | 8  | 2-3/4 | 1-1/2 | 3/16 | .51 | 6.9 |
| IL98B-4G-H-P                                             | IL98B-4S-H-P   | 100  | 1/4-20  | 1/2   | 1-1/4 | 8  | 3-1/4 | 2     | 3/16 | .51 | 6.9 |
| IL98B-5Gx1-P                                             | IL98B-5Sx1-P   | 500  | 5/16-18 | 1/2   | 1-1/4 | 8  | 2-1/4 | 1     | 3/16 | .51 | 6.9 |
| IL98B-5G-H-P                                             | IL98B-5S-H-P   | 500  | 5/16-18 | 1/2   | 1-1/4 | 8  | 3-1/4 | 2     | 3/16 | .51 | 6.9 |
| IL98B-6G-H-P                                             | IL98B-6S-H-P   | 3000 | 3/8-16  | 1/2   | 1-1/4 | 8  | 3-1/4 | 2     | 3/16 | .51 | 6.9 |
| IL98B-7G-H-P                                             | IL98B-7S-H-P   | 3000 | 1/2-13  | 1/2   | 1-1/4 | 8  | 3-1/4 | 2     | 3/16 | .51 | 6.9 |
| IL98B-8G-H-P                                             | IL98B-8S-H-P   | 3000 | 5/8-11  | 5/8   | 1-1/4 | 8  | 3-1/4 | 2     | 3/16 | .51 | 6.9 |
| IL98B-9G-H-P                                             | IL98B-9S-H-P   | 3000 | 3/4-10  | 3/4   | 1-1/4 | 8  | 3-1/4 | 2     | 3/16 | .51 | 6.9 |
| IL98B-10G-H-P                                            | IL98B-10S-H-P  | 3000 | 1-8     | 1     | 1-1/2 | 8  | 3-1/2 | 2     | 7/16 | .51 | 6.9 |
| IL98B-12G-H-P                                            | IL98B-12S-H-P  | 3000 | 1 1/4-7 | 1-1/4 | 1-1/2 | 8  | 3-1/2 | 2     | 7/16 | .51 | 6.9 |
| IL98C-4Gx1-H-P                                           | IL98C-4Sx1-H-P | 100  | 1/4-20  | 1/2   | 1-1/4 | 10 | 2-1/4 | 1     | 3/16 | .51 | 8.9 |
| IL98C-4Gx15-P                                            | IL98C-4Sx15-P  | 100  | 1/4-20  | 1/2   | 1-1/4 | 10 | 3-1/4 | 1-1/2 | 3/16 | .51 | 8.9 |
| IL98C-4G-H-P                                             | IL98C-4S-H-P   | 100  | 1/4-20  | 1/2   | 1-1/4 | 10 | 3-1/4 | 2     | 3/16 | .51 | 8.9 |
| IL98C-5Gx1-P                                             | IL98C-5Sx1-P   | 500  | 5/16-18 | 1/2   | 1-1/4 | 10 | 2-1/4 | 1     | 3/16 | .51 | 8.9 |
| IL98C-5G-H-P                                             | IL98C-5S-H-P   | 500  | 5/16-18 | 1/2   | 1-1/4 | 10 | 3-1/4 | 2     | 3/16 | .51 | 8.9 |
| IL98C-6G-H-P                                             | IL98C-6S-H-P   | 3000 | 3/8-16  | 1/2   | 1-1/4 | 10 | 3-1/4 | 2     | 3/16 | .51 | 8.9 |
| IL98C-7G-H-P                                             | IL98C-7S-H-P   | 3000 | 1/2-13  | 1/2   | 1-1/4 | 10 | 3-1/4 | 2     | 3/16 | .51 | 8.9 |
| IL98C-8G-H-P                                             | IL98C-8S-H-P   | 3000 | 5/8-11  | 5/8   | 1-1/4 | 10 | 3-1/4 | 2     | 3/16 | .51 | 8.9 |
| IL98B-9G-H-P                                             | IL98C-9S-H-P   | 3000 | 3/4-10  | 3/4   | 1-1/4 | 10 | 3-1/4 | 2     | 3/16 | .51 | 8.9 |
| IL98C-10G-H-P                                            | IL98C-10S-H-P  | 3000 | 1-8     | 1     | 1-1/2 | 10 | 3-1/2 | 2     | 7/16 | .51 | 8.9 |
| IL98C-12G-H-P                                            | IL98C-12S-H-P  | 3000 | 1 1/4-7 | 1-1/4 | 1-1/2 | 10 | 3-1/2 | 2     | 7/16 | .51 | 8.9 |

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS****NYLON SWIVEL 3-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**

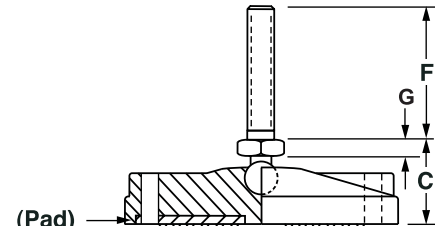
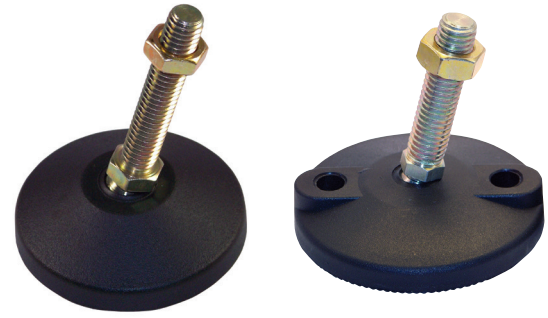
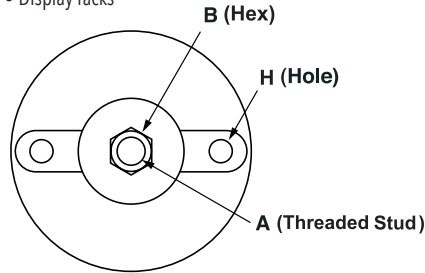

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**1" to 3-1/8" Base Diameters**

| Steel                                                    | Stainless      | Load | A       | B     | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|----------------|------|---------|-------|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-3" Stud and Rubber Pad</b> |                |      |         |       |       |       |       |   |      |     |     |
| IL90-4GX3-P                                              | IL90-4SX3-P    | 100  | 1/4-20  | 1/2   | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-5GX3-P                                              | IL90-5SX3-P    | 500  | 5/16-18 | 1/2   | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-6GX3-P                                              | IL90-6SX3-P    | 2000 | 3/8-16  | 1/2   | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-7GX3-P                                              | IL90-7SX3-P    | 2000 | 1/2-13  | 1/2   | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-8GX3-P                                              | IL90-8SX3-P    | 2000 | 5/8-11  | 5/8   | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-9GX3-P                                              | IL90-9SX3-P    | 2000 | 3/4-10  | 3/4   | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-10GX3-P                                             | IL90-10SX3-P   | 2000 | 1-8     | 1     | 1 1/4 | 1     | 4 1/4 | 3 | 7/16 | -   | -   |
| IL90-12GX3-P                                             | IL90-12SX3-P   | 2000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 1     | 4 1/4 | 3 | 7/16 | -   | -   |
| IL92-4GX3-P                                              | IL92-4SX3-P    | 100  | 1/4-20  | 1/2   | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-5GX3-P                                              | IL92-5SX3-P    | 500  | 5/16-18 | 1/2   | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-6GX3-P                                              | IL92-6SX3-P    | 2000 | 3/8-16  | 1/2   | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-7GX3-P                                              | IL92-7SX3-P    | 2000 | 1/2-13  | 1/2   | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-8GX3-P                                              | IL92-8SX3-P    | 2000 | 5/8-11  | 5/8   | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-9GX3-P                                              | IL92-9SX3-P    | 2000 | 3/4-10  | 3/4   | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-10GX3-P                                             | IL92-10SX3-P   | 2000 | 1-8     | 1     | 1 1/4 | 1 1/2 | 4 1/4 | 3 | 7/16 | -   | -   |
| IL92-12GX3-P                                             | IL92-12SX3-P   | 2000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 1 1/2 | 4 1/4 | 3 | 7/16 | -   | -   |
| IL94-4GX3-P                                              | IL94-4SX3-P    | 100  | 1/4-20  | 1/2   | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-5GX3-P                                              | IL94-5SX3-P    | 500  | 5/16-18 | 1/2   | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-6GX3-P                                              | IL94-6SX3-P    | 2500 | 3/8-16  | 1/2   | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-7GX3-P                                              | IL94-7SX3-P    | 2500 | 1/2-13  | 1/2   | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-8GX3-P                                              | IL94-8SX3-P    | 2500 | 5/8-11  | 5/8   | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-9GX3-P                                              | IL94-9SX3-P    | 2500 | 3/4-10  | 3/4   | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-10GX3-P                                             | IL94-10SX3-P   | 2500 | 1-8     | 1     | 1 1/4 | 2 3/8 | 4 1/4 | 3 | 7/16 | -   | -   |
| IL94-12GX3-P                                             | IL94-12SX3-P   | 2500 | 1 1/4-7 | 1 1/4 | 1 1/4 | 2 3/8 | 4 1/4 | 3 | 7/16 | -   | -   |
| IL96-4GX3-H-P                                            | IL96-4SX3-H-P  | 100  | 1/4-20  | 1/2   | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-5GX3-H-P                                            | IL96-5SX3-H-P  | 500  | 5/16-18 | 1/2   | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-6GX3-H-P                                            | IL96-6SX3-H-P  | 3000 | 3/8-16  | 1/2   | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-7GX3-H-P                                            | IL96-7SX3-H-P  | 3000 | 1/2-13  | 1/2   | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-8GX3-H-P                                            | IL96-8SX3-H-P  | 3000 | 5/8-11  | 5/8   | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-9GX3-H-P                                            | IL96-9SX3-H-P  | 3000 | 3/4-10  | 3/4   | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-10GX3-H-P                                           | IL96-10SX3-H-P | 3000 | 1-8     | 1     | 1 1/4 | 3 1/8 | 4 1/4 | 3 | 7/16 | .39 | 2.2 |
| IL96-12GX3-H-P                                           | IL96-12SX3-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 3 1/8 | 4 1/4 | 3 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS****NYLON SWIVEL 3-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**

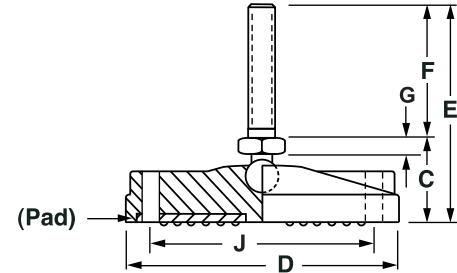
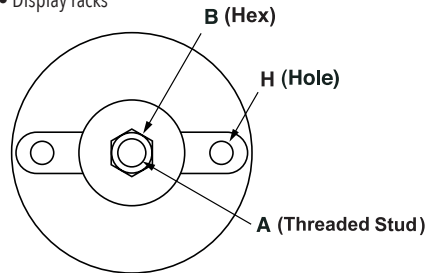

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless       | Load | A       | B     | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|---------|-------|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-3" Stud and Rubber Pad</b> |                 |      |         |       |       |    |       |   |      |     |     |
| IL98-4GX3-H-P                                            | IL98-4SX3-H-P   | 100  | 1/4-20  | 1/2   | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-5GX3-H-P                                            | IL98-5SX3-H-P   | 500  | 5/16-18 | 1/2   | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-6GX3-H-P                                            | IL98-6SX3-H-P   | 3000 | 3/8-16  | 1/2   | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-7GX3-H-P                                            | IL98-7SX3-H-P   | 3000 | 1/2-13  | 1/2   | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-8GX3-H-P                                            | IL98-8SX3-H-P   | 3000 | 5/8-11  | 5/8   | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-9GX3-H-P                                            | IL98-9SX3-H-P   | 3000 | 3/4-10  | 3/4   | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-10GX3-H-P                                           | IL98-10SX3-H-P  | 3000 | 1-8     | 1     | 1 1/2 | 4  | 4 1/2 | 3 | 7/16 | .51 | 2.9 |
| IL98-12GX3-H-P                                           | IL98-12SX3-H-P  | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 4  | 4 1/2 | 3 | 7/16 | .51 | 2.9 |
| IL98A-4GX3-H-P                                           | IL98A-4SX3-H-P  | 100  | 1/4-20  | 1/2   | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-5GX3-H-P                                           | IL98A-5SX3-H-P  | 500  | 5/16-18 | 1/2   | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-6GX3-H-P                                           | IL98A-6SX3-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-7GX3-H-P                                           | IL98A-7SX3-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-8GX3-H-P                                           | IL98A-8SX3-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-9GX3-H-P                                           | IL98A-9SX3-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-10GX3-H-P                                          | IL98A-10SX3-H-P | 3000 | 1-8     | 1     | 1 1/2 | 6  | 4 1/2 | 3 | 7/16 | .51 | 4.9 |
| IL98A-12GX3-H-P                                          | IL98A-12SX3-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 6  | 4 1/2 | 3 | 7/16 | .51 | 4.9 |
| IL98B-4GX3-H-P                                           | IL98B-4SX3-H-P  | 100  | 1/4-20  | 1/2   | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-5GX3-H-P                                           | IL98B-5SX3-H-P  | 500  | 5/16-18 | 1/2   | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-6GX3-H-P                                           | IL98B-6SX3-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-7GX3-H-P                                           | IL98B-7SX3-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-8GX3-H-P                                           | IL98B-8SX3-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-9GX3-H-P                                           | IL98B-9SX3-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-10GX3-H-P                                          | IL98B-10SX3-H-P | 3000 | 1-8     | 1     | 1 1/2 | 8  | 4 1/2 | 3 | 7/16 | .51 | 6.9 |
| IL98B-12GX3-H-P                                          | IL98B-12SX3-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 8  | 4 1/2 | 3 | 7/16 | .51 | 6.9 |
| IL98C-4GX3-H-P                                           | IL98C-4SX3-H-P  | 100  | 1/4-20  | 1/2   | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-5GX3-H-P                                           | IL98C-5SX3-H-P  | 500  | 5/16-18 | 1/2   | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-6GX3-H-P                                           | IL98C-6SX3-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-7GX3-H-P                                           | IL98C-7SX3-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-8GX3-H-P                                           | IL98C-8SX3-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-9GX3-H-P                                           | IL98C-9SX3-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-10GX3-H-P                                          | IL98C-10SX3-H-P | 3000 | 1-8     | 1     | 1 1/2 | 10 | 4 1/2 | 3 | 7/16 | .51 | 8.9 |
| IL98C-12GX3-H-P                                          | IL98C-12SX3-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 10 | 4 1/2 | 3 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS****NYLON SWIVEL 4-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**

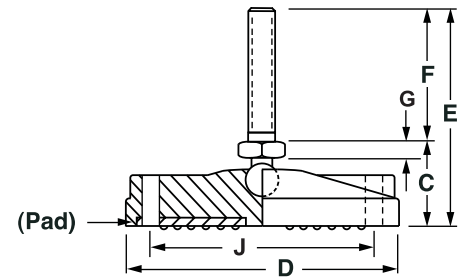
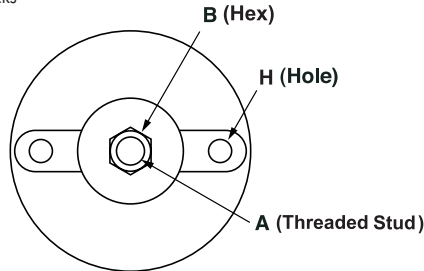
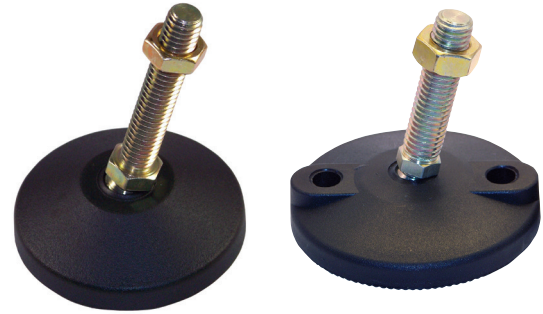

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**1" to 3-1/8" Base Diameters**

| Steel                                                    | Stainless      | Load | A       | B     | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|----------------|------|---------|-------|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-4" Stud and Rubber Pad</b> |                |      |         |       |       |       |       |   |      |     |     |
| IL90-5GX4-P                                              | IL90-5SX4-P    | 500  | 5/16-18 | 1/2   | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-6GX4-P                                              | IL90-6SX4-P    | 2000 | 3/8-16  | 1/2   | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-7GX4-P                                              | IL90-7SX4-P    | 2000 | 1/2-13  | 1/2   | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-8GX4-P                                              | IL90-8SX4-P    | 2000 | 5/8-11  | 5/8   | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-9GX4-P                                              | IL90-9SX4-P    | 2000 | 3/4-10  | 3/4   | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-10GX4-P                                             | IL90-10SX4-P   | 2000 | 1-8     | 1     | 1 1/4 | 1     | 5 1/4 | 4 | 7/16 | -   | -   |
| IL90-12GX4-P                                             | IL90-12SX4-P   | 2000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 1     | 5 1/4 | 4 | 7/16 | -   | -   |
| IL92-5GX4-P                                              | IL92-5SX4-P    | 500  | 5/16-18 | 1/2   | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL92-6GX4-P                                              | IL92-6SX4-P    | 2000 | 3/8-16  | 1/2   | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL92-7GX4-P                                              | IL92-7SX4-P    | 2000 | 1/2-13  | 1/2   | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL92-8GX4-P                                              | IL92-8SX4-P    | 2000 | 5/8-11  | 5/8   | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL92-9GX4-P                                              | IL92-9SX4-P    | 2000 | 3/4-10  | 3/4   | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL92-10GX4-P                                             | IL92-10SX4-P   | 2000 | 1-8     | 1     | 1 1/4 | 1     | 5 1/4 | 4 | 7/16 | -   | -   |
| IL92-12GX4-P                                             | IL92-12SX4-P   | 2000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 1     | 5 1/4 | 4 | 7/16 | -   | -   |
| IL94-5GX4-P                                              | IL94-5SX4-P    | 500  | 5/16-18 | 1/2   | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-6GX4-P                                              | IL94-6SX4-P    | 2500 | 3/8-16  | 1/2   | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-7GX4-P                                              | IL94-7SX4-P    | 2500 | 1/2-13  | 1/2   | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-8GX4-P                                              | IL94-8SX4-P    | 2500 | 5/8-11  | 5/8   | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-9GX4-P                                              | IL94-9SX4-P    | 2500 | 3/4-10  | 3/4   | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-10GX4-P                                             | IL94-10SX4-P   | 2500 | 1-8     | 1     | 1 1/4 | 2 3/8 | 5 1/4 | 4 | 7/16 | -   | -   |
| IL94-12GX4-P                                             | IL94-12SX4-P   | 2500 | 1 1/4-7 | 1 1/4 | 1 1/4 | 2 3/8 | 5 1/4 | 4 | 7/16 | -   | -   |
| IL96-5GX4-H-P                                            | IL96-5SX4-H-P  | 500  | 5/16-18 | 1/2   | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-6GX4-H-P                                            | IL96-6SX4-H-P  | 3000 | 3/8-16  | 1/2   | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-7GX4-H-P                                            | IL96-7SX4-H-P  | 3000 | 1/2-13  | 1/2   | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-8GX4-H-P                                            | IL96-8SX4-H-P  | 3000 | 5/8-11  | 5/8   | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-9GX4-H-P                                            | IL96-9SX4-H-P  | 3000 | 3/4-10  | 3/4   | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-10GX4-H-P                                           | IL96-10SX4-H-P | 3000 | 1-8     | 1     | 1 1/4 | 3 1/8 | 5 1/4 | 4 | 7/16 | .39 | 2.2 |
| IL96-12GX4-H-P                                           | IL96-12SX4-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 3 1/8 | 5 1/4 | 4 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."  
To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS****NYLON SWIVEL 4-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**

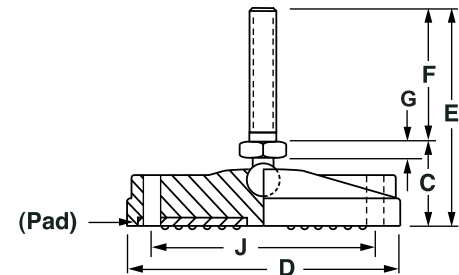
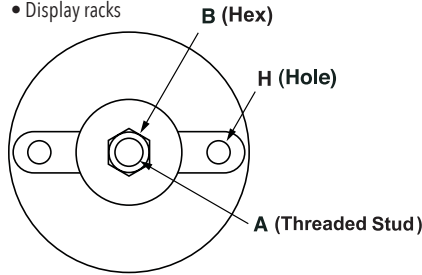
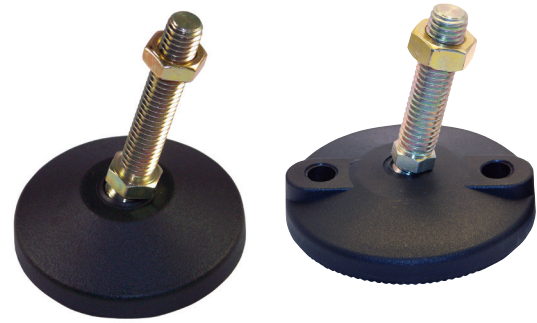

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless       | Load | A       | B     | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|---------|-------|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers—4" Stud and Rubber Pad</b> |                 |      |         |       |       |    |       |   |      |     |     |
| IL98-5GX4-H-P                                            | IL98-5SX4-H-P   | 500  | 5/16-18 | 1/2   | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-6GX4-H-P                                            | IL98-6SX4-H-P   | 3000 | 3/8-16  | 1/2   | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-7GX4-H-P                                            | IL98-7SX4-H-P   | 3000 | 1/2-13  | 1/2   | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-8GX4-H-P                                            | IL98-8SX4-H-P   | 3000 | 5/8-11  | 5/8   | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-9GX4-H-P                                            | IL98-9SX4-H-P   | 3000 | 3/4-10  | 3/4   | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-10GX4-H-P                                           | IL98-10SX4-H-P  | 3000 | 1-8     | 1     | 1 1/2 | 4  | 5 1/2 | 4 | 7/16 | .51 | 2.9 |
| IL98-12GX4-H-P                                           | IL98-12SX4-H-P  | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 4  | 5 1/2 | 4 | 7/16 | .51 | 2.9 |
| IL98A-5GX4-H-P                                           | IL98A-5SX4-H-P  | 500  | 5/16-18 | 1/2   | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-6GX4-H-P                                           | IL98A-6SX4-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-7GX4-H-P                                           | IL98A-7SX4-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-8GX4-H-P                                           | IL98A-8SX4-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-9GX4-H-P                                           | IL98A-9SX4-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-10GX4-H-P                                          | IL98A-10SX4-H-P | 3000 | 1-8     | 1     | 1 1/2 | 6  | 5 1/2 | 4 | 7/16 | .51 | 4.9 |
| IL98A-12GX4-H-P                                          | IL98A-12SX4-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 6  | 5 1/2 | 4 | 7/16 | .51 | 4.9 |
| IL98B-5GX4-H-P                                           | IL98B-5SX4-H-P  | 500  | 5/16-18 | 1/2   | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-6GX4-H-P                                           | IL98B-6SX4-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-7GX4-H-P                                           | IL98B-7SX4-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-8GX4-H-P                                           | IL98B-8SX4-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-9GX4-H-P                                           | IL98B-9SX4-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-10GX4-H-P                                          | IL98B-10SX4-H-P | 3000 | 1-8     | 1     | 1 1/2 | 8  | 5 1/2 | 4 | 7/16 | .51 | 6.9 |
| IL98B-12GX4-H-P                                          | IL98B-12SX4-H-P | 7500 | 1 1/4-7 | 1 1/4 | 1 1/2 | 8  | 5 1/2 | 4 | 7/16 | .51 | 6.9 |
| IL98C-5GX4-H-P                                           | IL98C-5SX4-H-P  | 500  | 5/16-18 | 1/2   | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-6GX4-H-P                                           | IL98C-6SX4-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-7GX4-H-P                                           | IL98C-7SX4-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-8GX4-H-P                                           | IL98C-8SX4-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-9GX4-H-P                                           | IL98C-9SX4-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-10GX4-H-P                                          | IL98C-10SX4-H-P | 3000 | 1-8     | 1     | 1 1/2 | 10 | 5 1/2 | 4 | 7/16 | .51 | 8.9 |
| IL98C-12GX4-H-P                                          | IL98C-12SX4-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 10 | 5 1/2 | 4 | 7/16 | .51 | 8.9 |

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |





**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

## MEDIUM-DUTY LEVELERS

### NYLON SWIVEL 5-INCH STUD

## NYLON SWIVEL STUD LEVELERS – with Rubber Pad

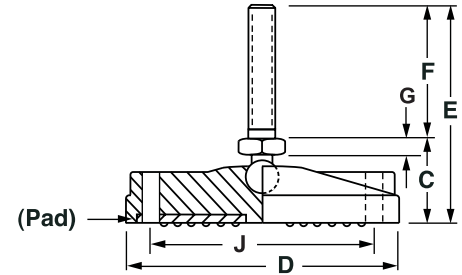
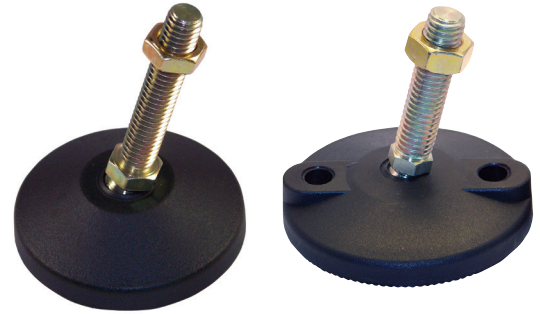
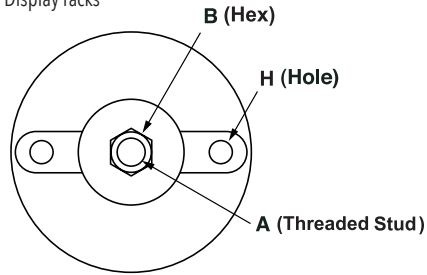

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



### 1 to 4" Base Diameters

| Steel                                                    | Stainless      | Load | A       | B     | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|----------------|------|---------|-------|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-5" Stud and Rubber Pad</b> |                |      |         |       |       |       |       |   |      |     |     |
| IL90-6GX5-P                                              | IL90-6SX5-P    | 2000 | 3/8-16  | 1/2   | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-7GX5-P                                              | IL90-7SX5-P    | 2000 | 1/2-13  | 1/2   | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-8GX5-P                                              | IL90-8SX5-P    | 2000 | 5/8-11  | 5/8   | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-9GX5-P                                              | IL90-9SX5-P    | 2000 | 3/4-10  | 3/4   | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-10GX5-P                                             | IL90-10SX5-P   | 2000 | 1-8     | 1     | 1 1/4 | 1     | 6 1/4 | 5 | 7/16 | -   | -   |
| IL90-12GX5-P                                             | IL90-12SX5-P   | 2000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 1     | 6 1/4 | 5 | 7/16 | -   | -   |
| IL92-6GX5-P                                              | IL92-6SX5-P    | 2000 | 3/8-16  | 1/2   | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-7GX5-P                                              | IL92-7SX5-P    | 2000 | 1/2-13  | 1/2   | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-8GX5-P                                              | IL92-8SX5-P    | 2000 | 5/8-11  | 5/8   | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-9GX5-P                                              | IL92-9SX5-P    | 2000 | 3/4-10  | 3/4   | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-10GX5-P                                             | IL92-10SX5-P   | 2000 | 1-8     | 1     | 1 1/4 | 1 1/2 | 6 1/4 | 5 | 7/16 | -   | -   |
| IL92-12GX5-P                                             | IL92-12SX5-P   | 2000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 1 1/2 | 6 1/4 | 5 | 7/16 | -   | -   |
| IL94-6GX5-P                                              | IL94-6SX5-P    | 2500 | 3/8-16  | 1/2   | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-7GX5-P                                              | IL94-7SX5-P    | 2500 | 1/2-13  | 1/2   | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-8GX5-P                                              | IL94-8SX5-P    | 2500 | 5/8-11  | 5/8   | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-9GX5-P                                              | IL94-9SX5-P    | 2500 | 3/4-10  | 3/4   | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-10GX5-P                                             | IL94-10SX5-P   | 2500 | 1-8     | 1     | 1 1/4 | 2 3/8 | 6 1/4 | 5 | 7/16 | -   | -   |
| IL94-12GX5-P                                             | IL94-12SX5-P   | 2500 | 1 1/4-7 | 1 1/4 | 1 1/4 | 2 3/8 | 6 1/4 | 5 | 7/16 | -   | -   |
| IL96-6GX5-H-P                                            | IL96-6SX5-H-P  | 3000 | 3/8-16  | 1/2   | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-7GX5-H-P                                            | IL96-7SX5-H-P  | 3000 | 1/2-13  | 1/2   | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-8GX5-H-P                                            | IL96-8SX5-H-P  | 3000 | 5/8-11  | 5/8   | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-9GX5-H-P                                            | IL96-9SX5-H-P  | 3000 | 3/4-10  | 3/4   | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-10GX5-H-P                                           | IL96-10SX5-H-P | 3000 | 1-8     | 1     | 1 1/4 | 3 1/8 | 6 1/4 | 5 | 7/16 | .39 | 2.2 |
| IL96-12GX5-H-P                                           | IL96-12SX5-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 3 1/8 | 6 1/4 | 5 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."  
To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS****NYLON SWIVEL 5-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**

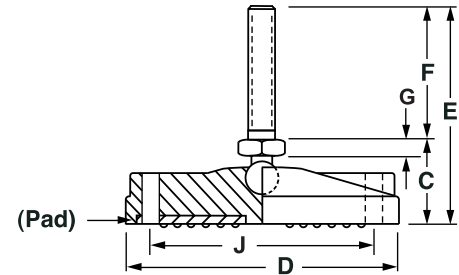
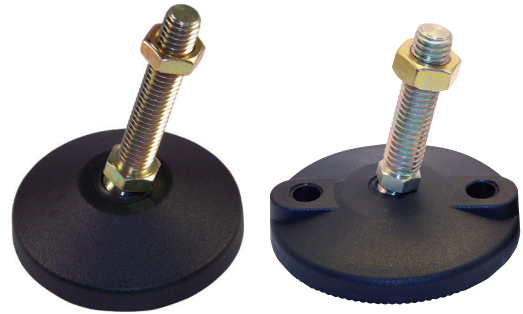
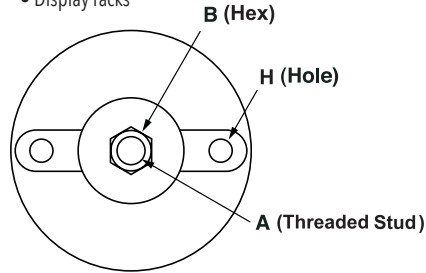

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless       | Load | A       | B     | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|---------|-------|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-5" Stud and Rubber Pad</b> |                 |      |         |       |       |    |       |   |      |     |     |
| IL98-6GX5-H-P                                            | IL98-6SX5-H-P   | 3000 | 3/8-16  | 1/2   | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-7GX5-H-P                                            | IL98-7SX5-H-P   | 3000 | 1/2-13  | 1/2   | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-8GX5-H-P                                            | IL98-8SX5-H-P   | 3000 | 5/8-11  | 5/8   | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-9GX5-H-P                                            | IL98-9SX5-H-P   | 3000 | 3/4-10  | 3/4   | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-10GX5-H-P                                           | IL98-10SX5-H-P  | 3000 | 1-8     | 1     | 1 1/2 | 4  | 6 1/2 | 5 | 7/16 | .51 | 2.9 |
| IL98-12GX5-H-P                                           | IL98-12SX5-H-P  | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 4  | 6 1/2 | 5 | 7/16 | .51 | 2.9 |
| IL98A-6GX5-H-P                                           | IL98A-6SX5-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-7GX5-H-P                                           | IL98A-7SX5-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-8GX5-H-P                                           | IL98A-8SX5-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-9GX5-H-P                                           | IL98A-9SX5-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-10GX5-H-P                                          | IL98A-10SX5-H-P | 3000 | 1-8     | 1     | 1 1/2 | 6  | 6 1/2 | 5 | 7/16 | .51 | 4.9 |
| IL98A-12GX5-H-P                                          | IL98A-12SX5-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 6  | 6 1/2 | 5 | 7/16 | .51 | 4.9 |
| IL98B-6GX5-H-P                                           | IL98B-6SX5-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-7GX5-H-P                                           | IL98B-7SX5-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-8GX5-H-P                                           | IL98B-8SX5-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-9GX5-H-P                                           | IL98B-9SX5-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-10GX5-H-P                                          | IL98B-10SX5-H-P | 3000 | 1-8     | 1     | 1 1/2 | 8  | 6 1/2 | 5 | 7/16 | .51 | 6.9 |
| IL98B-12GX5-H-P                                          | IL98B-12SX5-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 8  | 6 1/2 | 5 | 7/16 | .51 | 6.9 |
| IL98C-6GX5-H-P                                           | IL98C-6SX5-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-7GX5-H-P                                           | IL98C-7SX5-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-8GX5-H-P                                           | IL98C-8SX5-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-9GX5-H-P                                           | IL98C-9SX5-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-10GX5-H-P                                          | IL98C-10SX5-H-P | 3000 | 1-8     | 1     | 1 1/2 | 10 | 6 1/2 | 5 | 7/16 | .51 | 8.9 |
| IL98C-12GX5-H-P                                          | IL98C-12SX5-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 10 | 6 1/2 | 5 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

## MEDIUM-DUTY LEVELERS

### NYLON SWIVEL 6-INCH STUD

## NYLON SWIVEL STUD LEVELERS – with Rubber Pad

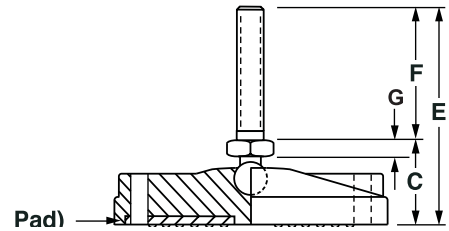
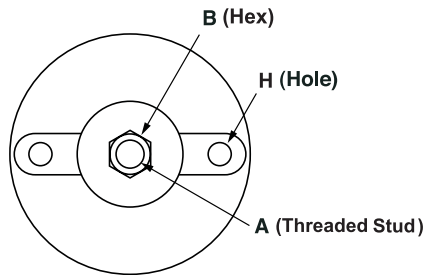
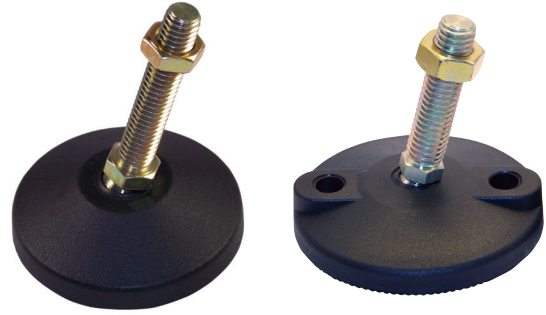

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



### 1" to 4" Base Diameters

| Steel                                                    | Stainless      | Load | A       | B     | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|----------------|------|---------|-------|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers—6" Stud and Rubber Pad</b> |                |      |         |       |       |       |       |   |      |     |     |
| IL90-6GX6-P                                              | IL90-6SX6-P    | 2000 | 3/8-16  | 1/2   | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-7GX6-P                                              | IL90-7SX6-P    | 2000 | 1/2-13  | 1/2   | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-8GX6-P                                              | IL90-8SX6-P    | 2000 | 5/8-11  | 5/8   | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-9GX6-P                                              | IL90-9SX6-P    | 2000 | 3/4-10  | 3/4   | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-10GX6-P                                             | IL90-10SX6-P   | 2000 | 1-8     | 1     | 1 1/4 | 1     | 7 1/4 | 6 | 7/16 | -   | -   |
| IL90-12GX6-P                                             | IL90-12SX6-P   | 2000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 1     | 7 1/4 | 6 | 7/16 | -   | -   |
| IL92-6GX6-P                                              | IL92-6SX6-P    | 2000 | 3/8-16  | 1/2   | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-7GX6-P                                              | IL92-7SX6-P    | 2000 | 1/2-13  | 1/2   | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-8GX6-P                                              | IL92-8SX6-P    | 2000 | 5/8-11  | 5/8   | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-9GX6-P                                              | IL92-9SX6-P    | 2000 | 3/4-10  | 3/4   | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-10GX6-P                                             | IL92-10SX6-P   | 2000 | 1-8     | 1     | 1 1/4 | 1 1/2 | 7 1/4 | 6 | 7/16 | -   | -   |
| IL92-12GX6-P                                             | IL92-12SX6-P   | 2000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 1 1/2 | 7 1/4 | 6 | 7/16 | -   | -   |
| IL94-6GX6-P                                              | IL94-6SX6-P    | 2500 | 3/8-16  | 1/2   | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-7GX6-P                                              | IL94-7SX6-P    | 2500 | 1/2-13  | 1/2   | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-8GX6-P                                              | IL94-8SX6-P    | 2500 | 5/8-11  | 5/8   | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-9GX6-P                                              | IL94-9SX6-P    | 2500 | 3/4-10  | 3/4   | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-10GX6-P                                             | IL94-10SX6-P   | 2500 | 1-8     | 1     | 1 1/4 | 2 3/8 | 7 1/4 | 6 | 7/16 | -   | -   |
| IL94-12GX6-P                                             | IL94-12SX6-P   | 2500 | 1 1/4-7 | 1 1/4 | 1 1/4 | 2 3/8 | 7 1/4 | 6 | 7/16 | -   | -   |
| IL96-6GX6-H-P                                            | IL96-6SX6-H-P  | 3000 | 3/8-16  | 1/2   | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-7GX6-H-P                                            | IL96-7SX6-H-P  | 3000 | 1/2-13  | 1/2   | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-8GX6-H-P                                            | IL96-8SX6-H-P  | 3000 | 5/8-11  | 5/8   | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-9GX6-H-P                                            | IL96-9SX6-H-P  | 3000 | 3/4-10  | 3/4   | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-10GX6-H-P                                           | IL96-10SX6-H-P | 3000 | 1-8     | 1     | 1 1/4 | 3 1/8 | 7 1/4 | 6 | 7/16 | .39 | 2.2 |
| IL96-12GX6-H-P                                           | IL96-12SX6-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 3 1/8 | 7 1/4 | 6 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS****NYLON SWIVEL 6-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**

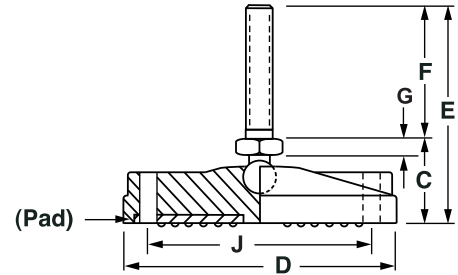
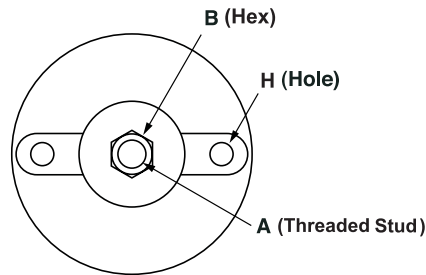
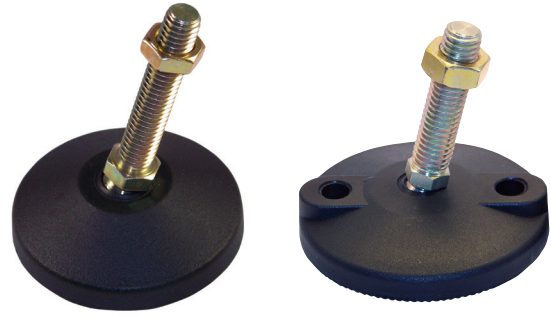

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add ".BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless       | Load | A       | B     | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|---------|-------|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers—6" Stud and Rubber Pad</b> |                 |      |         |       |       |    |       |   |      |     |     |
| IL98-6GX6-H-P                                            | IL98-6SX6-H-P   | 3000 | 3/8-16  | 1/2   | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-7GX6-H-P                                            | IL98-7SX6-H-P   | 3000 | 1/2-13  | 1/2   | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-8GX6-H-P                                            | IL98-8SX6-H-P   | 3000 | 5/8-11  | 5/8   | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-9GX6-H-P                                            | IL98-9SX6-H-P   | 3000 | 3/4-10  | 3/4   | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-10GX6-H-P                                           | IL98-10SX6-H-P  | 3000 | 1-8     | 1     | 1 1/2 | 4  | 7 1/2 | 6 | 7/16 | .51 | 2.9 |
| IL98-12GX6-H-P                                           | IL98-12SX6-H-P  | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 4  | 7 1/2 | 6 | 7/16 | .51 | 2.9 |
| IL98A-6GX6-H-P                                           | IL98A-6SX6-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-7GX6-H-P                                           | IL98A-7SX6-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-8GX6-H-P                                           | IL98A-8SX6-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-9GX6-H-P                                           | IL98A-9SX6-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-10GX6-H-P                                          | IL98A-10SX6-H-P | 3000 | 1-8     | 1     | 1 1/2 | 6  | 7 1/2 | 6 | 7/16 | .51 | 4.9 |
| IL98A-12GX6-H-P                                          | IL98A-12SX6-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 6  | 7 1/2 | 6 | 7/16 | .51 | 4.9 |
| IL98B-6GX6-H-P                                           | IL98B-6SX6-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-7GX6-H-P                                           | IL98B-7SX6-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-8GX6-H-P                                           | IL98B-8SX6-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-9GX6-H-P                                           | IL98B-9SX6-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-10GX6-H-P                                          | IL98B-10SX6-H-P | 3000 | 1-8     | 1     | 1 1/2 | 8  | 7 1/2 | 6 | 7/16 | .51 | 6.9 |
| IL98B-12GX6-H-P                                          | IL98B-12SX6-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 8  | 7 1/2 | 6 | 7/16 | .51 | 6.9 |
| IL98C-6GX6-H-P                                           | IL98C-6SX6-H-P  | 3000 | 3/8-16  | 1/2   | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-7GX6-H-P                                           | IL98C-7SX6-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-8GX6-H-P                                           | IL98C-8SX6-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-9GX6-H-P                                           | IL98C-9SX6-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-10GX6-H-P                                          | IL98C-10SX6-H-P | 3000 | 1-8     | 1     | 1 1/2 | 10 | 7 1/2 | 6 | 7/16 | .51 | 8.9 |
| IL98C-12GX6-H-P                                          | IL98C-12SX6-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 10 | 7 1/2 | 6 | 7/16 | .51 | 8.9 |

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."  
To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS****NYLON SWIVEL 8-INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**

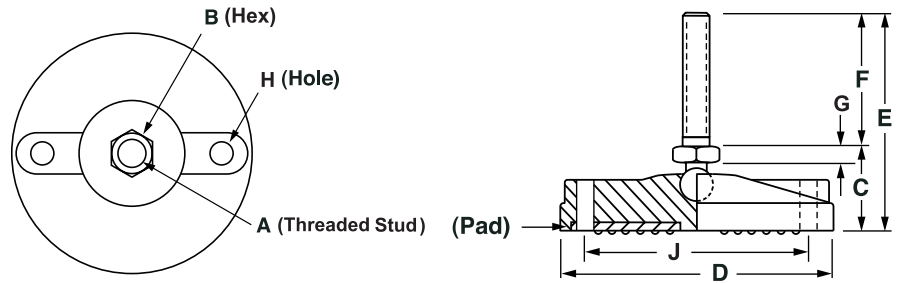
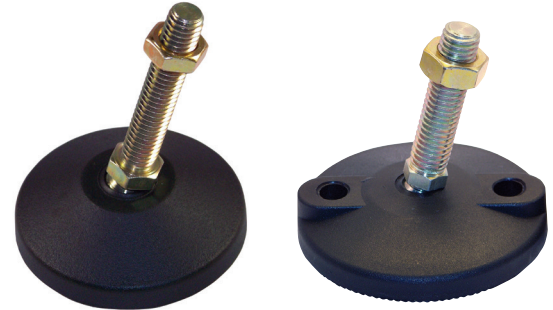

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**1" to 4" Base Diameters**

| Steel                                                    | Stainless      | Load | A       | B     | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|----------------|------|---------|-------|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-8" Stud and Rubber Pad</b> |                |      |         |       |       |       |       |   |      |     |     |
| IL90-7GX8-P                                              | IL90-7SX8-P    | 2000 | 1/2-13  | 1/2   | 1     | 1     | 9     | 8 | 3/16 | -   | -   |
| IL90-8GX8-P                                              | IL90-8SX8-P    | 2000 | 5/8-11  | 5/8   | 1     | 1     | 9     | 8 | 3/16 | -   | -   |
| IL90-9GX8-P                                              | IL90-9SX8-P    | 2000 | 3/4-10  | 3/4   | 1     | 1     | 9     | 8 | 3/16 | -   | -   |
| IL90-10GX8-P                                             | IL90-10SX8-P   | 2000 | 1-8     | 1     | 1 1/4 | 1     | 9 1/4 | 8 | 7/16 | -   | -   |
| IL90-12GX8-P                                             | IL90-12SX8-P   | 2000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 1     | 9 1/4 | 8 | 7/16 | -   | -   |
| IL92-7GX8-P                                              | IL92-7SX8-P    | 2000 | 1/2-13  | 1/2   | 1     | 1 1/2 | 9     | 8 | 3/16 | -   | -   |
| IL92-8GX8-P                                              | IL92-8SX8-P    | 2000 | 5/8-11  | 5/8   | 1     | 1 1/2 | 9     | 8 | 3/16 | -   | -   |
| IL92-9GX8-P                                              | IL92-9SX8-P    | 2000 | 3/4-10  | 3/4   | 1     | 1 1/2 | 9     | 8 | 3/16 | -   | -   |
| IL92-10GX8-P                                             | IL92-10SX8-P   | 2000 | 1-8     | 1     | 1 1/4 | 1 1/2 | 9 1/4 | 8 | 7/16 | -   | -   |
| IL92-12GX8-P                                             | IL92-12SX8-P   | 2000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 1 1/2 | 9 1/4 | 8 | 7/16 | -   | -   |
| IL94-7GX8-P                                              | IL94-7SX8-P    | 2500 | 1/2-13  | 1/2   | 1     | 2 3/8 | 9     | 8 | 3/16 | -   | -   |
| IL94-8GX8-P                                              | IL94-8SX8-P    | 2500 | 5/8-11  | 5/8   | 1     | 2 3/8 | 9     | 8 | 3/16 | -   | -   |
| IL94-9GX8-P                                              | IL94-9SX8-P    | 2500 | 3/4-10  | 3/4   | 1     | 2 3/8 | 9     | 8 | 3/16 | -   | -   |
| IL94-10GX8-P                                             | IL94-10SX8-P   | 2500 | 1-8     | 1     | 1 1/4 | 2 3/8 | 9 1/4 | 8 | 7/16 | -   | -   |
| IL94-12GX8-P                                             | IL94-12SX8-P   | 2500 | 1 1/4-7 | 1 1/4 | 1 1/4 | 2 3/8 | 9 1/4 | 8 | 7/16 | -   | -   |
| IL96-7GX8-H-P                                            | IL96-7SX8-H-P  | 3000 | 1/2-13  | 1/2   | 1     | 3 1/8 | 9     | 8 | 3/16 | .39 | 2.2 |
| IL96-8GX8-H-P                                            | IL96-8SX8-H-P  | 3000 | 5/8-11  | 5/8   | 1     | 3 1/8 | 9     | 8 | 3/16 | .39 | 2.2 |
| IL96-9GX8-H-P                                            | IL96-9SX8-H-P  | 3000 | 3/4-10  | 3/4   | 1     | 3 1/8 | 9     | 8 | 3/16 | .39 | 2.2 |
| IL96-10GX8-H-P                                           | IL96-10SX8-H-P | 3000 | 1-8     | 1     | 1 1/4 | 3 1/8 | 9 1/4 | 8 | 7/16 | .39 | 2.2 |
| IL96-12GX8-H-P                                           | IL96-12SX8-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/4 | 3 1/8 | 9 1/4 | 8 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."  
To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS****NYLON SWIVEL 8 INCH STUD****NYLON SWIVEL STUD LEVELERS – with Rubber Pad**

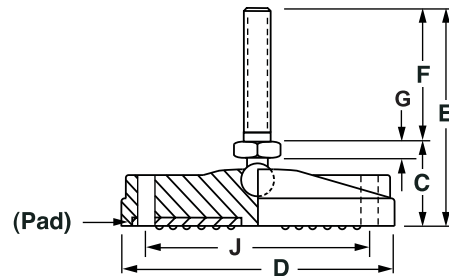
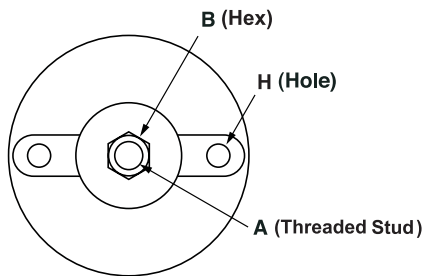
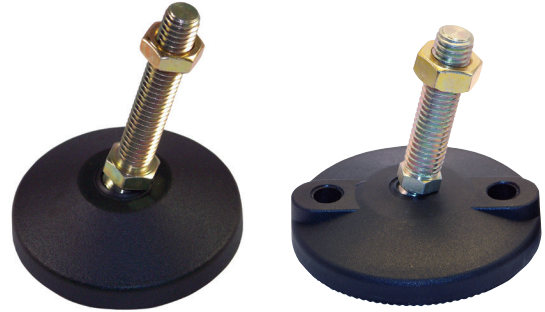

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless       | Load | A       | B     | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|---------|-------|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers—8" Stud and Rubber Pad</b> |                 |      |         |       |       |    |       |   |      |     |     |
| IL98-7GX8-H-P                                            | IL98-7SX8-H-P   | 3000 | 1/2-13  | 1/2   | 1 1/4 | 4  | 9 1/4 | 8 | 3/16 | .51 | 2.9 |
| IL98-8GX8-H-P                                            | IL98-8SX8-H-P   | 3000 | 5/8-11  | 5/8   | 1 1/4 | 4  | 9 1/4 | 8 | 3/16 | .51 | 2.9 |
| IL98-9GX8-H-P                                            | IL98-9SX8-H-P   | 3000 | 3/4-10  | 3/4   | 1 1/4 | 4  | 9 1/4 | 8 | 3/16 | .51 | 2.9 |
| IL98-10GX8-H-P                                           | IL98-10SX8-H-P  | 3000 | 1-8     | 1     | 1 1/2 | 4  | 9 1/2 | 8 | 7/16 | .51 | 2.9 |
| IL98-12GX8-H-P                                           | IL98-12SX8-H-P  | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 4  | 9 1/2 | 8 | 7/16 | .51 | 2.9 |
| IL98A-7GX8-H-P                                           | IL98A-7SX8-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 6  | 9 1/4 | 8 | 3/16 | .51 | 4.9 |
| IL98A-8GX8-H-P                                           | IL98A-8SX8-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 6  | 9 1/4 | 8 | 3/16 | .51 | 4.9 |
| IL98A-9GX8-H-P                                           | IL98A-9SX8-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 6  | 9 1/4 | 8 | 3/16 | .51 | 4.9 |
| IL98A-10GX8-H-P                                          | IL98A-10SX8-H-P | 3000 | 1-8     | 1     | 1 1/2 | 6  | 9 1/2 | 8 | 7/16 | .51 | 4.9 |
| IL98A-12GX8-H-P                                          | IL98A-12SX8-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 6  | 9 1/2 | 8 | 7/16 | .51 | 4.9 |
| IL98B-7GX8-H-P                                           | IL98B-7SX8-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 8  | 9 1/4 | 8 | 3/16 | .51 | 6.9 |
| IL98B-8GX8-H-P                                           | IL98B-8SX8-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 8  | 9 1/4 | 8 | 3/16 | .51 | 6.9 |
| IL98B-9GX8-H-P                                           | IL98B-9SX8-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 8  | 9 1/4 | 8 | 3/16 | .51 | 6.9 |
| IL98B-10GX8-H-P                                          | IL98B-10SX8-H-P | 3000 | 1-8     | 1     | 1 1/2 | 8  | 9 1/2 | 8 | 7/16 | .51 | 6.9 |
| IL98B-12GX8-H-P                                          | IL98B-12SX8-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 8  | 9 1/2 | 8 | 7/16 | .51 | 6.9 |
| IL98C-7GX8-H-P                                           | IL98C-7SX8-H-P  | 3000 | 1/2-13  | 1/2   | 1 1/4 | 10 | 9 1/4 | 8 | 3/16 | .51 | 8.9 |
| IL98C-8GX8-H-P                                           | IL98C-8SX8-H-P  | 3000 | 5/8-11  | 5/8   | 1 1/4 | 10 | 9 1/4 | 8 | 3/16 | .51 | 8.9 |
| IL98C-9GX8-H-P                                           | IL98C-9SX8-H-P  | 3000 | 3/4-10  | 3/4   | 1 1/4 | 10 | 9 1/4 | 8 | 3/16 | .51 | 8.9 |
| IL98C-10GX8-H-P                                          | IL98C-10SX8-H-P | 3000 | 1-8     | 1     | 1 1/2 | 10 | 9 1/2 | 8 | 7/16 | .51 | 8.9 |
| IL98C-12GX8-H-P                                          | IL98C-12SX8-H-P | 3000 | 1 1/4-7 | 1 1/4 | 1 1/2 | 10 | 9 1/2 | 8 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |        |         |        |        |        |        |      |         |
|-----------------------------------------|--------|---------|--------|--------|--------|--------|------|---------|
| Thread                                  | 1/4-20 | 5/16-18 | 3/8-16 | 1/2-13 | 5/8-11 | 3/4-10 | 1-8  | 1-1/4-7 |
| Hex Size                                | 1/8    | 5/32    | 3/16   | 1/4    | 5/16   | 3/8    | 9/16 | 5/8     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 1" &amp; 2" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

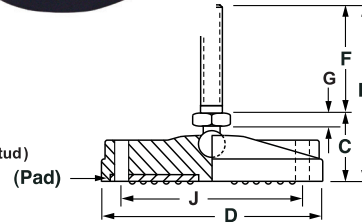
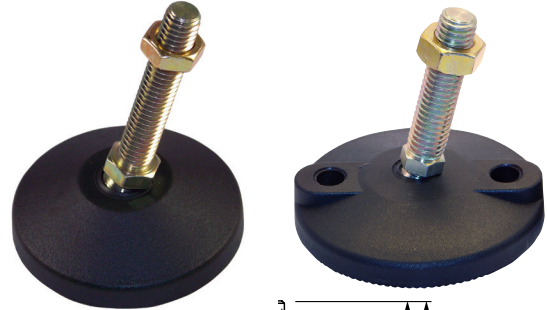


The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- M6 & M8 available in 1" (25mm) length
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 1" to 4" Base Diameters**

| Steel                                                    | Stainless      | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers—2" Stud and Rubber Pad</b> |                |      |          |     |       |       |       |   |      |     |     |
| IL90-M6Gx1-P                                             | IL90-M6Sx1-P   | 100  | M6X1     | 1/2 | 1     | 1     | 2     | 1 | 3/16 | -   | -   |
| IL90-M8Gx1-P                                             | IL90-M8Sx1-P   | 500  | M8X1.25  | 1/2 | 1     | 1     | 2     | 1 | 3/16 | -   | -   |
| IL90-M6G-P                                               | IL90-M6S-P     | 100  | M6X1     | 1/2 | 1     | 1     | 3     | 2 | 3/16 | -   | -   |
| IL90-M8G-P                                               | IL90-M8S-P     | 500  | M8X1.25  | 1/2 | 1     | 1     | 2     | 2 | 3/16 | -   | -   |
| IL90-M10G-P                                              | IL90-M10S-P    | 2000 | M10X1.50 | 1/2 | 1     | 1     | 3     | 2 | 3/16 | -   | -   |
| IL90-M12G-P                                              | IL90-M12S-P    | 2000 | M12X1.75 | 1/2 | 1     | 1     | 3     | 2 | 3/16 | -   | -   |
| IL90-M16G-P                                              | IL90-M16S-P    | 2000 | M16X2.00 | 5/8 | 1     | 1     | 3     | 2 | 3/16 | -   | -   |
| IL90-M20G-P                                              | IL90-M20S-P    | 2000 | M20X2.50 | 3/4 | 1     | 1     | 3     | 2 | 3/16 | -   | -   |
| IL90-M24G-P                                              | IL90-M24S-P    | 2000 | M24X3.00 | 1   | 1-1/4 | 1     | 3-1/4 | 2 | 7/16 | -   | -   |
| IL92-M6Gx1-P                                             | IL92-M6Sx1-P   | 100  | M6X1     | 1/2 | 1     | 1-1/2 | 2     | 1 | 3/16 | -   | -   |
| IL92-M8Gx1-P                                             | IL92-M8Sx1-P   | 500  | M8X1.25  | 1/2 | 1     | 1-1/2 | 2     | 1 | 3/16 | -   | -   |
| IL92-M6G-P                                               | IL92-M6S-P     | 100  | M6X1     | 1/2 | 1     | 1-1/2 | 3     | 2 | 3/16 | -   | -   |
| IL92-M8G-P                                               | IL92-M8S-P     | 500  | M8X1.25  | 1/2 | 1     | 1-1/2 | 2     | 2 | 3/16 | -   | -   |
| IL92-M10G-P                                              | IL92-M10S-P    | 2000 | M10X1.50 | 1/2 | 1     | 1-1/2 | 3     | 2 | 3/16 | -   | -   |
| IL92-M12G-P                                              | IL92-M12S-P    | 2000 | M12X1.75 | 1/2 | 1     | 1-1/2 | 3     | 2 | 3/16 | -   | -   |
| IL92-M16G-P                                              | IL92-M16S-P    | 2000 | M16X2.00 | 5/8 | 1     | 1-1/2 | 3     | 2 | 3/16 | -   | -   |
| IL92-M20G-P                                              | IL92-M20S-P    | 2000 | M20X2.50 | 3/4 | 1     | 1-1/2 | 3     | 2 | 3/16 | -   | -   |
| IL92-M24G-P                                              | IL92-M24S-P    | 2000 | M24X3.00 | 1   | 1-1/4 | 1-1/2 | 3-1/4 | 2 | 7/16 | -   | -   |
| IL94-M6Gx1-P                                             | IL94-M6Sx1-P   | 100  | M6X1     | 1/2 | 1     | 2-3/8 | 2     | 1 | 3/16 | -   | -   |
| IL94-M8Gx1-P                                             | IL94-M8Sx1-P   | 500  | M8X1.25  | 1/2 | 1     | 2-3/8 | 2     | 1 | 3/16 | -   | -   |
| IL94-M6G-P                                               | IL94-M6S-P     | 100  | M6X1     | 1/2 | 1     | 2-3/8 | 3     | 2 | 3/16 | -   | -   |
| IL94-M8G-P                                               | IL94-M8S-P     | 500  | M8X1.25  | 1/2 | 1     | 2-3/8 | 2     | 2 | 3/16 | -   | -   |
| IL94-M10G-P                                              | IL94-M10S-P    | 2500 | M10X1.50 | 1/2 | 1     | 2-3/8 | 3     | 2 | 3/16 | -   | -   |
| IL94-M12G-P                                              | IL94-M12S-P    | 2500 | M12X1.75 | 1/2 | 1     | 2-3/8 | 3     | 2 | 3/16 | -   | -   |
| IL94-M16G-P                                              | IL94-M16S-P    | 2500 | M16X2.00 | 5/8 | 1     | 2-3/8 | 3     | 2 | 3/16 | -   | -   |
| IL94-M20G-P                                              | IL94-M20S-P    | 2500 | M20X2.50 | 3/4 | 1     | 2-3/8 | 3     | 2 | 3/16 | -   | -   |
| IL94-M24G-P                                              | IL94-M24S-P    | 2500 | M24X3.00 | 1   | 1-1/4 | 2-3/8 | 3-1/4 | 2 | 7/16 | -   | -   |
| IL96-M6Gx1-H-P                                           | IL96-M6Sx1-H-P | 100  | M6X1     | 1/2 | 1     | 3-1/8 | 2     | 1 | 3/16 | .39 | 2.2 |
| IL96-M8Gx1-H-P                                           | IL96-M8Sx1-H-P | 500  | M8X1.25  | 1/2 | 1     | 3-1/8 | 2     | 1 | 3/16 | .39 | 2.2 |
| IL96-M6G-H-P                                             | IL96-M6S-H-P   | 100  | M6X1     | 1/2 | 1     | 3-1/8 | 3     | 2 | 3/16 | .39 | 2.2 |
| IL96-M8G-H-P                                             | IL96-M8S-H-P   | 500  | M8X1.25  | 1/2 | 1     | 3-1/8 | 2     | 2 | 3/16 | .39 | 2.2 |
| IL96-M10G-H-P                                            | IL96-M10S-H-P  | 3000 | M10X1.50 | 1/2 | 1     | 3-1/8 | 3     | 2 | 3/16 | .39 | 2.2 |
| IL96-M12G-H-P                                            | IL96-M12S-H-P  | 3000 | M12X1.75 | 1/2 | 1     | 3-1/8 | 3     | 2 | 3/16 | .39 | 2.2 |
| IL96-M16G-H-P                                            | IL96-M16S-H-P  | 3000 | M16X2.00 | 5/8 | 1     | 3-1/8 | 3     | 2 | 3/16 | .39 | 2.2 |
| IL96-M20G-H-P                                            | IL96-M20S-H-P  | 3000 | M20X2.50 | 3/4 | 1     | 3-1/8 | 3     | 2 | 3/16 | .39 | 2.2 |
| IL96-M24G-H-P                                            | IL96-M24S-H-P  | 3000 | M24X3.00 | 1   | 1-1/4 | 3-1/8 | 3-1/4 | 2 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 1" &amp; 2" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

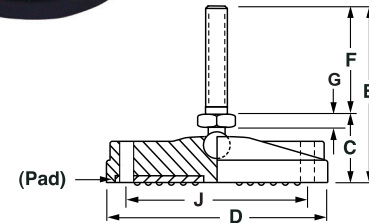


The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless       | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-2" Stud and Rubber Pad</b> |                 |      |          |     |       |    |       |   |      |     |     |
| IL98-M6Gx1-H-P                                           | IL98-M6Sx1-H-P  | 100  | M6X1     | 1/2 | 1-1/4 | 4  | 2-1/4 | 1 | 3/16 | .51 | 2.9 |
| IL98-M8Gx1-H-P                                           | IL98-M8Sx1-H-P  | 500  | M8X1.25  | 1/2 | 1-1/4 | 4  | 2-1/4 | 1 | 3/16 | .51 | 2.9 |
| IL98-M6G-H-P                                             | IL98-M6S-H-P    | 100  | M6X1     | 1/2 | 1-1/4 | 4  | 3-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M8G-H-P                                             | IL98-M8S-H-P    | 500  | M8X1.25  | 1/2 | 1-1/4 | 4  | 2-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M10G-H-P                                            | IL98-M10S-H-P   | 3000 | M10X1.50 | 1/2 | 1-1/4 | 4  | 3-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M12G-H-P                                            | IL98-M12S-H-P   | 3000 | M12X1.75 | 1/2 | 1-1/4 | 4  | 3-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M16G-H-P                                            | IL98-M16S-H-P   | 3000 | M16X2.00 | 5/8 | 1-1/4 | 4  | 3-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M20G-H-P                                            | IL98-M20S-H-P   | 3000 | M20X2.50 | 3/4 | 1-1/4 | 4  | 3-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M24G-H-P                                            | IL98-M24S-H-P   | 3000 | M24X3.00 | 1   | 1-1/2 | 4  | 3-1/2 | 2 | 7/16 | .51 | 2.9 |
| IL98A-M6Gx1-H-P                                          | IL98A-M6Sx1-H-P | 100  | M6X1     | 1/2 | 1-1/4 | 6  | 2-1/4 | 1 | 3/16 | .51 | 4.9 |
| IL98A-M8Gx1-H-P                                          | IL98A-M8Sx1-H-P | 500  | M8X1.25  | 1/2 | 1-1/4 | 6  | 2-1/4 | 1 | 3/16 | .51 | 4.9 |
| IL98A-M6G-H-P                                            | IL98A-M6S-H-P   | 100  | M6X1     | 1/2 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M8G-H-P                                            | IL98A-M8S-H-P   | 500  | M8X1.25  | 1/2 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M10G-H-P                                           | IL98A-M10S-H-P  | 3000 | M10X1.50 | 1/2 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M12G-H-P                                           | IL98A-M12S-H-P  | 3000 | M12X1.75 | 1/2 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M16G-H-P                                           | IL98A-M16S-H-P  | 3000 | M16X2.00 | 5/8 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M20G-H-P                                           | IL98A-M20S-H-P  | 3000 | M20X2.50 | 3/4 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M24G-H-P                                           | IL98A-M24S-H-P  | 3000 | M24X3.00 | 1   | 1-1/2 | 6  | 3-1/2 | 2 | 7/16 | .51 | 4.9 |
| IL98B-M6Gx1-H-P                                          | IL98B-M6Sx1-H-P | 100  | M6X1     | 1/2 | 1-1/4 | 8  | 2-1/4 | 1 | 3/16 | .51 | 6.9 |
| IL98B-M8Gx1-H-P                                          | IL98B-M8Sx1-H-P | 500  | M8X1.25  | 1/2 | 1-1/4 | 8  | 2-1/4 | 1 | 3/16 | .51 | 6.9 |
| IL98B-M6G-H-P                                            | IL98B-M6S-H-P   | 100  | M6X1     | 1/2 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M8G-H-P                                            | IL98B-M8S-H-P   | 500  | M8X1.25  | 1/2 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M10G-H-P                                           | IL98B-M10S-H-P  | 3000 | M10X1.50 | 1/2 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M12G-H-P                                           | IL98B-M12S-H-P  | 3000 | M12X1.75 | 1/2 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M16G-H-P                                           | IL98B-M16S-H-P  | 3000 | M16X2.00 | 5/8 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M20G-H-P                                           | IL98B-M20S-H-P  | 3000 | M20X2.50 | 3/4 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M24G-H-P                                           | IL98B-M24S-H-P  | 3000 | M24X3.00 | 1   | 1-1/2 | 8  | 3-1/2 | 2 | 7/16 | .51 | 6.9 |
| IL98C-M6Gx1-H-P                                          | IL98C-M6Sx1-H-P | 100  | M6X1     | 1/2 | 1-1/4 | 10 | 2-1/4 | 1 | 3/16 | .51 | 8.9 |
| IL98C-M8Gx1-H-P                                          | IL98C-M8Sx1-H-P | 500  | M8X1.25  | 1/2 | 1-1/4 | 10 | 2-1/4 | 1 | 3/16 | .51 | 8.9 |
| IL98C-M6G-H-P                                            | IL98C-M6S-H-P   | 100  | M6X1     | 1/2 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M8G-H-P                                            | IL98C-M8S-H-P   | 500  | M8X1.25  | 1/2 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M10G-H-P                                           | IL98C-M10S-H-P  | 3000 | M10X1.50 | 1/2 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M12G-H-P                                           | IL98C-M12S-H-P  | 3000 | M12X1.75 | 1/2 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M16G-H-P                                           | IL98C-M16S-H-P  | 3000 | M16X2.00 | 5/8 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M20G-H-P                                           | IL98C-M20S-H-P  | 3000 | M20X2.50 | 3/4 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M24G-H-P                                           | IL98C-M24S-H-P  | 3000 | M24X3.00 | 1   | 1-1/2 | 10 | 3-1/2 | 2 | 7/16 | .51 | 8.9 |

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 3" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

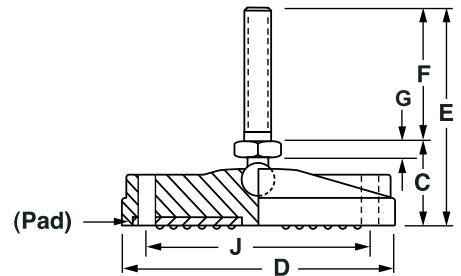


The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 1" to 4" Base Diameters**

| Steel                                                    | Stainless       | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-3" Stud and Rubber Pad</b> |                 |      |          |     |       |       |       |   |      |     |     |
| IL90-M6GX3-P                                             | IL90-M6SX3-P    | 100  | M6X1     | 1/2 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M8GX3-P                                             | IL90-M8SX3-P    | 500  | M8X1.25  | 1/2 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M10GX3-P                                            | IL90-M10SX3-P   | 2000 | M10X1.50 | 1/2 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M12GX3-P                                            | IL90-M12SX3-P   | 2000 | M12X1.75 | 1/2 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M16GX3-P                                            | IL90-M16SX3-P   | 2000 | M16X2.00 | 5/8 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M20GX3-P                                            | IL90-M20SX3-P   | 2000 | M20X2.50 | 3/4 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M24GX3-P                                            | IL90-M24SX3-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1     | 4 1/4 | 3 | 7/16 | -   | -   |
| IL92-M6GX3-P                                             | IL92-M6SX3-P    | 100  | M6X1     | 1/2 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M8GX3-P                                             | IL92-M8SX3-P    | 500  | M8X1.25  | 1/2 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M10GX3-P                                            | IL92-M10SX3-P   | 2000 | M10X1.50 | 1/2 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M12GX3-P                                            | IL92-M12SX3-P   | 2000 | M12X1.75 | 1/2 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M16GX3-P                                            | IL92-M16SX3-P   | 2000 | M16X2.00 | 5/8 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M20GX3-P                                            | IL92-M20SX3-P   | 2000 | M20X2.50 | 3/4 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M24GX3-P                                            | IL92-M24SX3-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1 1/2 | 4 1/4 | 3 | 7/16 | -   | -   |
| IL94-M6GX3-P                                             | IL94-M6SX3-P    | 100  | M6X1     | 1/2 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M8GX3-P                                             | IL94-M8SX3-P    | 500  | M8X1.25  | 1/2 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M10GX3-P                                            | IL94-M10SX3-P   | 2500 | M10X1.50 | 1/2 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M12GX3-P                                            | IL94-M12SX3-P   | 2500 | M12X1.75 | 1/2 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M16GX3-P                                            | IL94-M16SX3-P   | 2500 | M16X2.00 | 5/8 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M20GX3-P                                            | IL94-M20SX3-P   | 2500 | M20X2.50 | 3/4 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M24GX3-P                                            | IL94-M24SX3-P   | 2500 | M24X3.00 | 1   | 1 1/4 | 2 3/8 | 4 1/4 | 3 | 7/16 | -   | -   |
| IL96-M6GX3-H-P                                           | IL96-M6SX3-H-P  | 100  | M6X1     | 1/2 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M8GX3-H-P                                           | IL96-M8SX3-H-P  | 500  | M8X1.25  | 1/2 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M10GX3-H-P                                          | IL96-M10SX3-H-P | 3000 | M10X1.50 | 1/2 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M12GX3-H-P                                          | IL96-M12SX3-H-P | 3000 | M12X1.75 | 1/2 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M16GX3-H-P                                          | IL96-M16SX3-H-P | 3000 | M16X2.00 | 5/8 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M20GX3-H-P                                          | IL96-M20SX3-H-P | 3000 | M20X2.50 | 3/4 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M24GX3-H-P                                          | IL96-M24SX3-H-P | 3000 | M24X3.00 | 1   | 1 1/4 | 3 1/8 | 4 1/4 | 3 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 3" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

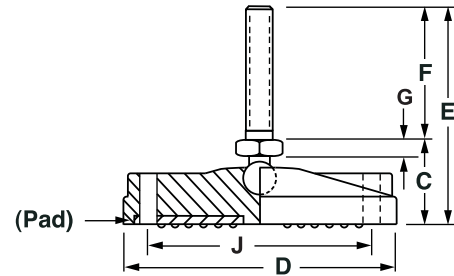
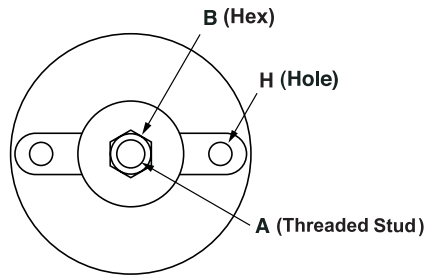
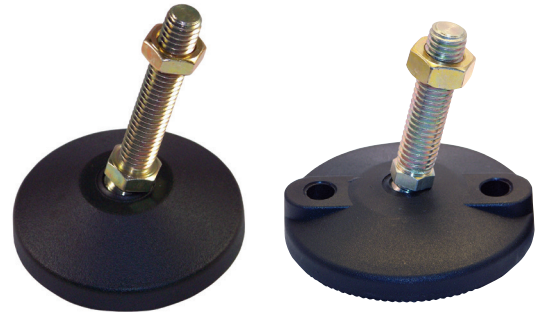

The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless        | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|------------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-3" Stud and Rubber Pad</b> |                  |      |          |     |       |    |       |   |      |     |     |
| IL98-M6GX3-H-P                                           | IL98-M6SX3-H-P   | 100  | M6X1     | 1/2 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M8GX3-H-P                                           | IL98-M8SX3-H-P   | 500  | M8X1.25  | 1/2 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M10GX3-H-P                                          | IL98-M10SX3-H-P  | 3000 | M10X1.50 | 1/2 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M12GX3-H-P                                          | IL98-M12SX3-H-P  | 3000 | M12X1.75 | 1/2 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M16GX3-H-P                                          | IL98-M16SX3-H-P  | 3000 | M16X2.00 | 5/8 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M20GX3-H-P                                          | IL98-M20SX3-H-P  | 3000 | M20X2.50 | 3/4 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M24GX3-H-P                                          | IL98-M24SX3-H-P  | 3000 | M24X3.00 | 1   | 1 1/2 | 4  | 4 1/2 | 3 | 7/16 | .51 | 2.9 |
| IL98A-M6GX3-H-P                                          | IL98A-M6SX3-H-P  | 100  | M6X1     | 1/2 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M8GX3-H-P                                          | IL98A-M8SX3-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M10GX3-H-P                                         | IL98A-M10SX3-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M12GX3-H-P                                         | IL98A-M12SX3-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M16GX3-H-P                                         | IL98A-M16SX3-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M20GX3-H-P                                         | IL98A-M20SX3-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M24GX3-H-P                                         | IL98A-M24SX3-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 6  | 4 1/2 | 3 | 7/16 | .51 | 4.9 |
| IL98B-M6GX3-H-P                                          | IL98B-M6SX3-H-P  | 100  | M6X1     | 1/2 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M8GX3-H-P                                          | IL98B-M8SX3-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M10GX3-H-P                                         | IL98B-M10SX3-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M12GX3-H-P                                         | IL98B-M12SX3-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M16GX3-H-P                                         | IL98B-M16SX3-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M20GX3-H-P                                         | IL98B-M20SX3-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M24GX3-H-P                                         | IL98B-M24SX3-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 8  | 4 1/2 | 3 | 7/16 | .51 | 6.9 |
| IL98C-M6GX3-H-P                                          | IL98C-M6SX3-H-P  | 100  | M6X1     | 1/2 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M8GX3-H-P                                          | IL98C-M8SX3-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M10GX3-H-P                                         | IL98C-M10SX3-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M12GX3-H-P                                         | IL98C-M12SX3-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M16GX3-H-P                                         | IL98C-M16SX3-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M20GX3-H-P                                         | IL98C-M20SX3-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M24GX3-H-P                                         | IL98C-M24SX3-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 10 | 4 1/2 | 3 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."  
To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 4" STUD

**NYLON METRIC SWIVEL STUD STYLE  
LEVELERS – with Rubber Pad**

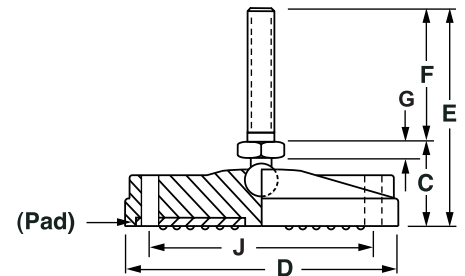
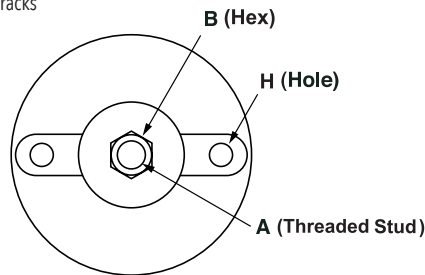
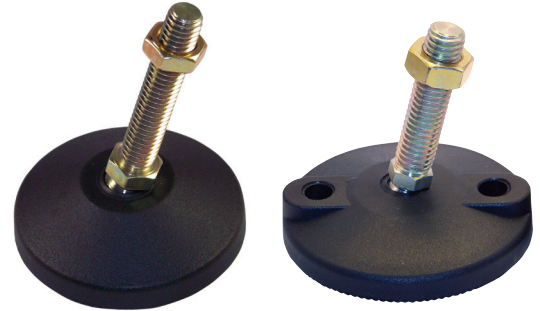

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 1" to 4" Base Diameters**

| Steel                                                    | Stainless       | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-4" Stud and Rubber Pad</b> |                 |      |          |     |       |       |       |   |      |     |     |
| IL90-M8GX4-P                                             | IL90-M8SX4-P    | 500  | M8X1.25  | 1/2 | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-M10GX4-P                                            | IL90-M10SX4-P   | 2000 | M10X1.50 | 1/2 | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-M12GX4-P                                            | IL90-M12SX4-P   | 2000 | M12X1.75 | 5/8 | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-M16GX4-P                                            | IL90-M16SX4-P   | 2000 | M16X2.00 | 3/4 | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-M20GX4-P                                            | IL90-M20SX4-P   | 2000 | M20X2.50 | 3/4 | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-M24GX4-P                                            | IL90-M24SX4-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1     | 5 1/4 | 4 | 7/16 | -   | -   |
| IL92-M8GX4-P                                             | IL92-M8SX4-P    | 500  | M8X1.25  | 1/2 | 1     | 1 1/2 | 5     | 4 | 3/16 | -   | -   |
| IL92-M10GX4-P                                            | IL92-M10SX4-P   | 2000 | M10X1.50 | 1/2 | 1     | 1 1/2 | 5     | 4 | 3/16 | -   | -   |
| IL92-M12GX4-P                                            | IL92-M12SX4-P   | 2000 | M12X1.75 | 5/8 | 1     | 1 1/2 | 5     | 4 | 3/16 | -   | -   |
| IL92-M16GX4-P                                            | IL92-M16SX4-P   | 2000 | M16X2.00 | 3/4 | 1     | 1 1/2 | 5     | 4 | 3/16 | -   | -   |
| IL92-M20GX4-P                                            | IL92-M20SX4-P   | 2000 | M20X2.50 | 3/4 | 1     | 1 1/2 | 5     | 4 | 3/16 | -   | -   |
| IL92-M24GX4-P                                            | IL92-M24SX4-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1 1/2 | 5 1/4 | 4 | 7/16 | -   | -   |
| IL94-M8GX4-P                                             | IL94-M8SX4-P    | 500  | M8X1.25  | 1/2 | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-M10GX4-P                                            | IL94-M10SX4-P   | 2500 | M10X1.50 | 1/2 | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-M12GX4-P                                            | IL94-M12SX4-P   | 2500 | M12X1.75 | 5/8 | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-M16GX4-P                                            | IL94-M16SX4-P   | 2500 | M16X2.00 | 3/4 | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-M20GX4-P                                            | IL94-M20SX4-P   | 2500 | M20X2.50 | 3/4 | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-M24GX4-P                                            | IL94-M24SX4-P   | 2500 | M24X3.00 | 1   | 1 1/4 | 2 3/8 | 5 1/4 | 4 | 7/16 | -   | -   |
| IL96-M8GX4-H-P                                           | IL96-M8SX4-H-P  | 500  | M8X1.25  | 1/2 | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-M10X4-H-P                                           | IL96-M10SX4-H-P | 3000 | M10X1.50 | 1/2 | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-M12GX4-H-P                                          | IL96-M12SX4-H-P | 3000 | M12X1.75 | 5/8 | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-M16GX4-H-P                                          | IL96-M16SX4-H-P | 3000 | M16X2.00 | 3/4 | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-M20GX4-H-P                                          | IL96-M20SX4-H-P | 3000 | M20X2.50 | 3/4 | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-M24GX4-H-P                                          | IL96-M24SX4-H-P | 3000 | M24X3.00 | 1   | 1 1/4 | 3 1/8 | 5 1/4 | 4 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 4" STUD

**NYLON METRIC SWIVEL STUD STYLE  
LEVELERS – with Rubber Pad**

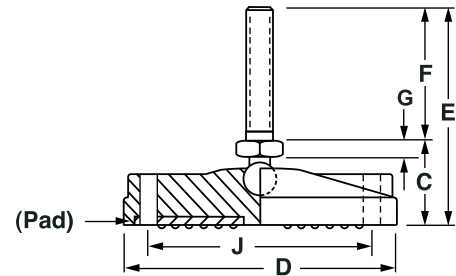
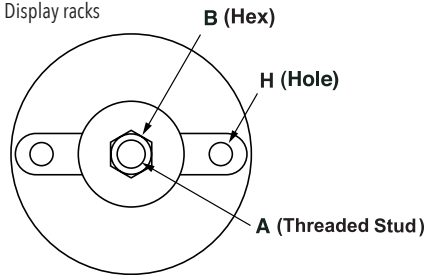
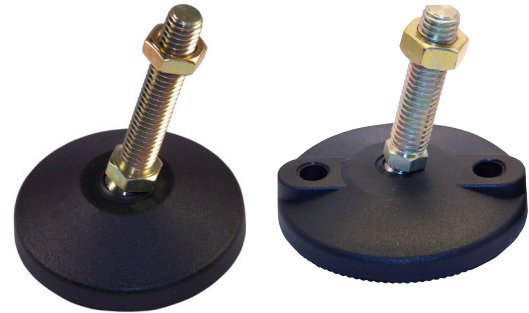

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless        | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|------------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-4" Stud and Rubber Pad</b> |                  |      |          |     |       |    |       |   |      |     |     |
| IL98-M8GX4-H-P                                           | IL98-M8SX4-H-P   | 500  | M8X1.25  | 1/2 | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-M10GX4-H-P                                          | IL98-M10SX4-H-P  | 3000 | M10X1.50 | 1/2 | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-M12GX4-H-P                                          | IL98-M12SX4-H-P  | 3000 | M12X1.75 | 5/8 | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-M16GX4-H-P                                          | IL98-M16SX4-H-P  | 3000 | M16X2.00 | 3/4 | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-M20GX4-H-P                                          | IL98-M20SX4-H-P  | 3000 | M20X2.50 | 3/4 | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-M24GX4-H-P                                          | IL98-M24SX4-H-P  | 3000 | M24X3.00 | 1   | 1 1/2 | 4  | 5 1/2 | 4 | 7/16 | .51 | 2.9 |
| IL98A-M8GX4-H-P                                          | IL98A-M8SX4-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-M10GX4-H-P                                         | IL98A-M10SX4-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-M12GX4-H-P                                         | IL98A-M12SX4-H-P | 3000 | M12X1.75 | 5/8 | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-M16GX4-H-P                                         | IL98A-M16SX4-H-P | 3000 | M16X2.00 | 3/4 | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-M20GX4-H-P                                         | IL98A-M20SX4-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-M24GX4-H-P                                         | IL98A-M24SX4-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 6  | 5 1/2 | 4 | 7/16 | .51 | 4.9 |
| IL98B-M8GX4-H-P                                          | IL98B-M8SX4-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-M10GX4-H-P                                         | IL98B-M10SX4-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-M12GX4-H-P                                         | IL98B-M12SX4-H-P | 3000 | M12X1.75 | 5/8 | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-M16GX4-H-P                                         | IL98B-M16SX4-H-P | 3000 | M16X2.00 | 3/4 | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-M20GX4-H-P                                         | IL98B-M20SX4-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-M24GX4-H-P                                         | IL98B-M24SX4-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 8  | 5 1/2 | 4 | 7/16 | .51 | 6.9 |
| IL98C-M8GX4-H-P                                          | IL98C-M8SX4-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-M10GX4-H-P                                         | IL98C-M10SX4-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-M12GX4-H-P                                         | IL98C-M12SX4-H-P | 3000 | M12X1.75 | 5/8 | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-M16GX4-H-P                                         | IL98C-M16SX4-H-P | 3000 | M16X2.00 | 3/4 | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-M20GX4-H-P                                         | IL98C-M20SX4-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-M24GX4-H-P                                         | IL98C-M24SX4-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 10 | 5 1/2 | 4 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."  
To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 5" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

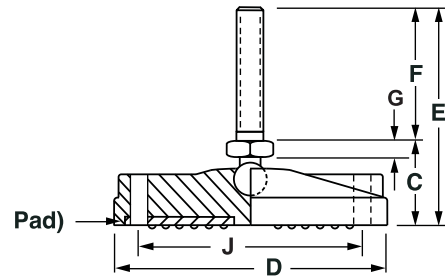
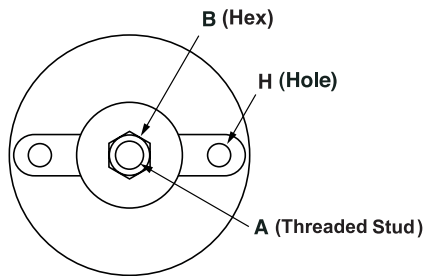

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 1" to 4" Base Diameters**

| Steel                                                    | Stainless       | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-5" Stud and Rubber Pad</b> |                 |      |          |     |       |       |       |   |      |     |     |
| IL90-M10GX5-P                                            | IL90-M10SX5-P   | 2000 | M10X1.50 | 1/2 | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-M12GX5-P                                            | IL90-M12SX5-P   | 2000 | M12X1.75 | 1/2 | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-M16GX5-P                                            | IL90-M16SX5-P   | 2000 | M16X2.00 | 5/8 | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-M20GX5-P                                            | IL90-M20SX5-P   | 2000 | M20X2.50 | 3/4 | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-M24GX5-P                                            | IL90-M24SX5-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1     | 6 1/4 | 5 | 7/16 | -   | -   |
| IL92-M10GX5-P                                            | IL92-M10SX5-P   | 2000 | M10X1.50 | 1/2 | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-M12GX5-P                                            | IL92-M12SX5-P   | 2000 | M12X1.75 | 1/2 | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-M16GX5-P                                            | IL92-M16SX5-P   | 2000 | M16X2.00 | 5/8 | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-M20GX5-P                                            | IL92-M20SX5-P   | 2000 | M20X2.50 | 3/4 | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-M24GX5-P                                            | IL92-M24SX5-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1 1/2 | 6 1/4 | 5 | 7/16 | -   | -   |
| IL94-M10GX5-P                                            | IL94-M10SX5-P   | 2500 | M10X1.50 | 1/2 | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-M12GX5-P                                            | IL94-M12SX5-P   | 2500 | M12X1.75 | 1/2 | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-M16GX5-P                                            | IL94-M16SX5-P   | 2500 | M16X2.00 | 5/8 | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-M20GX5-P                                            | IL94-M20SX5-P   | 2500 | M20X2.50 | 3/4 | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-M24GX5-P                                            | IL94-M24SX5-P   | 2500 | M24X3.00 | 1   | 1 1/4 | 2 3/8 | 6 1/4 | 5 | 7/16 | -   | -   |
| IL96-M10GX5-H-P                                          | IL96-M10SX5-H-P | 3000 | M10X1.50 | 1/2 | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-M12GX5-H-P                                          | IL96-M12SX5-H-P | 3000 | M12X1.75 | 1/2 | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-M16GX5-H-P                                          | IL96-M16SX5-H-P | 3000 | M16X2.00 | 5/8 | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-M20GX5-H-P                                          | IL96-M20SX5-H-P | 3000 | M20X2.50 | 3/4 | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-M24GX5-H-P                                          | IL96-M24SX5-H-P | 3000 | M24X3.00 | 1   | 1 1/4 | 3 1/8 | 6 1/4 | 5 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

## MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 5" STUD

### NYLON METRIC SWIVEL STUD STYLE

#### LEVELERS – with Rubber Pad

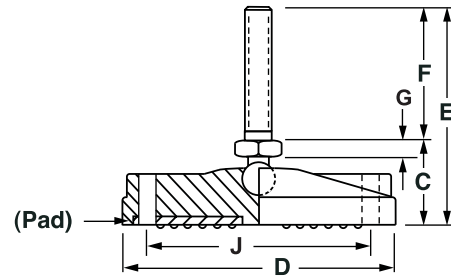
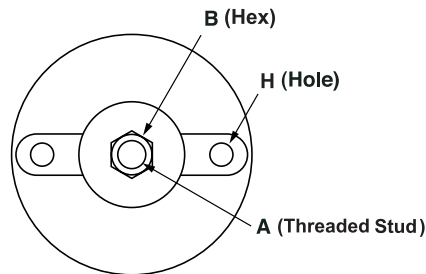
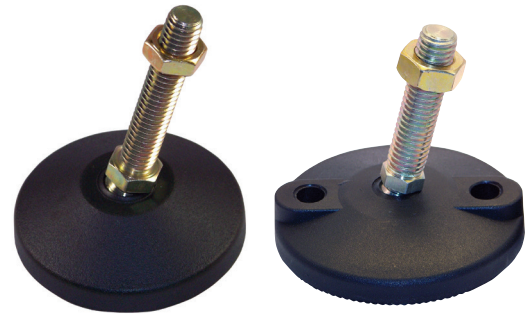

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

#### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

#### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



#### Metric Threads: 4", 6", 8" & 10" Base Diameters

| Steel                                                    | Stainless        | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|------------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-5" Stud and Rubber Pad</b> |                  |      |          |     |       |    |       |   |      |     |     |
| IL98-M10GX5-H-P                                          | IL98-M10SX5-H-P  | 3000 | M10X1.50 | 1/2 | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-M12GX5-H-P                                          | IL98-M12SX5-H-P  | 3000 | M12X1.75 | 1/2 | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-M16GX5-H-P                                          | IL98-M16SX5-H-P  | 3000 | M16X2.00 | 5/8 | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-M20GX5-H-P                                          | IL98-M20SX5-H-P  | 3000 | M20X2.50 | 3/4 | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-M24GX5-H-P                                          | IL98-M24SX5-H-P  | 3000 | M24X3.00 | 1   | 1 1/2 | 4  | 6 1/2 | 5 | 7/16 | .51 | 2.9 |
| IL98A-M10GX5-H-P                                         | IL98A-M10SX5-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-M12GX5-H-P                                         | IL98A-M12SX5-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-M16GX5-H-P                                         | IL98A-M16SX5-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-M20GX5-H-P                                         | IL98A-M20SX5-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-M24GX5-H-P                                         | IL98A-M24SX5-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 6  | 6 1/2 | 5 | 7/16 | .51 | 4.9 |
| IL98B-M10GX5-H-P                                         | IL98B-M10SX5-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-M12GX5-H-P                                         | IL98B-M12SX5-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-M16GX5-H-P                                         | IL98B-M16SX5-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-M20GX5-H-P                                         | IL98B-M20SX5-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-M24GX5-H-P                                         | IL98B-M24SX5-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 8  | 6 1/2 | 5 | 7/16 | .51 | 6.9 |
| IL98C-M10GX5-H-P                                         | IL98C-M10SX5-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-M12GX5-H-P                                         | IL98C-M12SX5-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-M16GX5-H-P                                         | IL98C-M16SX5-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-M20GX5-H-P                                         | IL98C-M20SX5-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-M24GX5-H-P                                         | IL98C-M24SX5-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 10 | 6 1/2 | 5 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

## MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 6" STUD

### NYLON METRIC SWIVEL STUD STYLE

#### LEVELERS – with Rubber Pad

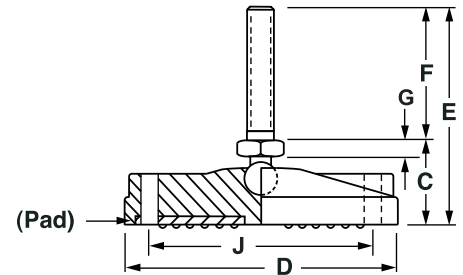
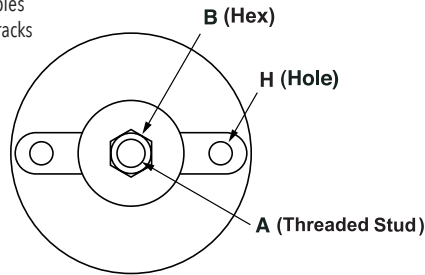

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

#### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

#### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



#### Metric Threads: 1" to 4" Base Diameters

| Steel                                                    | Stainless       | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-6" Stud and Rubber Pad</b> |                 |      |          |     |       |       |       |   |      |     |     |
| IL90-M8GX6-P                                             | IL90-M8SX6-P    | 2000 | M8X1.25  | 1/4 | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-M10GX6-P                                            | IL90-M10SX6-P   | 2000 | M10X1.50 | 1/2 | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-M12GX6-P                                            | IL90-M12SX6-P   | 2000 | M12X1.75 | 1/2 | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-M16GX6-P                                            | IL90-M16SX6-P   | 2000 | M16X2.00 | 5/8 | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-M20GX6-P                                            | IL90-M20SX6-P   | 2000 | M20X2.50 | 3/4 | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-M24GX6-P                                            | IL90-M24SX6-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1     | 7 1/4 | 6 | 7/16 | -   | -   |
| IL92-M8GX6-P                                             | IL92-M8SX6-P    | 2000 | M8X1.25  | 1/4 | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-M10GX6-P                                            | IL92-M10SX6-P   | 2000 | M10X1.50 | 1/2 | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-M12GX6-P                                            | IL92-M12SX6-P   | 2000 | M12X1.75 | 1/2 | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-M16GX6-P                                            | IL92-M16SX6-P   | 2000 | M16X2.00 | 5/8 | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-M20GX6-P                                            | IL92-M20SX6-P   | 2000 | M20X2.50 | 3/4 | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-M24GX6-P                                            | IL92-M24SX6-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1 1/2 | 7 1/4 | 6 | 7/16 | -   | -   |
| IL94-M8GX6-P                                             | IL94-M8SX6-P    | 2500 | M8X1.25  | 1/4 | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-M10GX6-P                                            | IL94-M10SX6-P   | 2500 | M10X1.50 | 1/2 | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-M12GX6-P                                            | IL94-M12SX6-P   | 2500 | M12X1.75 | 1/2 | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-M16GX6-P                                            | IL94-M16SX6-P   | 2500 | M16X2.00 | 5/8 | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-M20GX6-P                                            | IL94-M20SX6-P   | 2500 | M20X2.50 | 3/4 | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-M24GX6-P                                            | IL94-M24SX6-P   | 2500 | M24X3.00 | 1   | 1 1/4 | 2 3/8 | 7 1/4 | 6 | 7/16 | -   | -   |
| IL96-M8GX6-H-P                                           | IL96-M8SX6-H-P  | 3000 | M8X1.25  | 1/4 | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-M10GX6-H-P                                          | IL96-M10SX6-H-P | 3000 | M10X1.50 | 1/2 | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-M12GX6-H-P                                          | IL96-M12SX6-H-P | 3000 | M12X1.75 | 1/2 | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-M16GX6-H-P                                          | IL96-M16SX6-H-P | 3000 | M16X2.00 | 5/8 | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-M20GX6-H-P                                          | IL96-M20SX6-H-P | 3000 | M20X2.50 | 3/4 | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-M24GX6-H-P                                          | IL96-M24SX6-H-P | 3000 | M24X3.00 | 1   | 1 1/4 | 3 1/8 | 7 1/4 | 6 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 6" STUD

**NYLON METRIC SWIVEL STUD STYLE  
LEVELERS – with Rubber Pad**

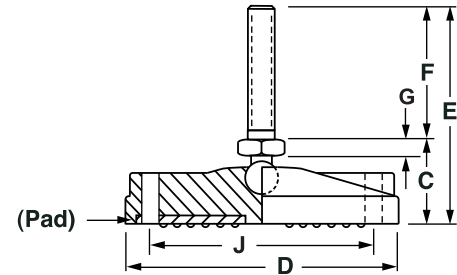
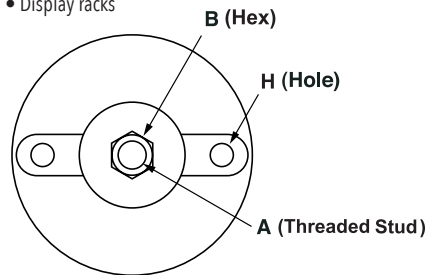

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless        | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|------------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-6" Stud and Rubber Pad</b> |                  |      |          |     |       |    |       |   |      |     |     |
| IL98-M8GX6-H-P                                           | IL98-M8SX6-H-P   | 3000 | M8X1.25  | 1/4 | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-M10GX6-H-P                                          | IL98-M10SX6-H-P  | 3000 | M10X1.50 | 1/2 | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-M12GX6-H-P                                          | IL98-M12SX6-H-P  | 3000 | M12X1.75 | 1/2 | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-M16GX6-H-P                                          | IL98-M16SX6-H-P  | 3000 | M16X2.00 | 5/8 | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-M20GX6-H-P                                          | IL98-M20SX6-H-P  | 3000 | M20X2.50 | 3/4 | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-M24GX6-H-P                                          | IL98-M24SX6-H-P  | 3000 | M24X3.00 | 1   | 1 1/2 | 4  | 7 1/2 | 6 | 7/16 | .51 | 2.9 |
| IL98A-M8GX6-H-P                                          | IL98A-M8SX6-H-P  | 3000 | M8X1.25  | 1/4 | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-M10GX6-H-P                                         | IL98A-M10SX6-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-M12GX6-H-P                                         | IL98A-M12SX6-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-M16GX6-H-P                                         | IL98A-M16SX6-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-M20GX6-H-P                                         | IL98A-M20SX6-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-M24GX6-H-P                                         | IL98A-M24SX6-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 6  | 7 1/2 | 6 | 7/16 | .51 | 4.9 |
| IL98B-M8GX6-H-P                                          | IL98B-M8SX6-H-P  | 3000 | M8X1.25  | 1/4 | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-M10GX6-H-P                                         | IL98B-M10SX6-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-M12GX6-H-P                                         | IL98B-M12SX6-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-M16GX6-H-P                                         | IL98B-M16SX6-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-M20GX6-H-P                                         | IL98B-M20SX6-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-M24GX6-H-P                                         | IL98B-M24SX6-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 8  | 7 1/2 | 6 | 7/16 | .51 | 6.9 |
| IL98C-M8GX6-H-P                                          | IL98C-M8SX6-H-P  | 3000 | M8X1.25  | 1/4 | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-M10GX6-H-P                                         | IL98C-M10SX6-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-M12GX6-H-P                                         | IL98C-M12SX6-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-M16GX6-H-P                                         | IL98C-M16SX6-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-M20GX6-H-P                                         | IL98C-M20SX6-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-M24GX6-H-P                                         | IL98C-M24SX6-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 10 | 7 1/2 | 6 | 7/16 | .51 | 8.9 |

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

## MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 8" STUD

### NYLON METRIC SWIVEL STUD STYLE

#### LEVELERS – with Rubber Pad

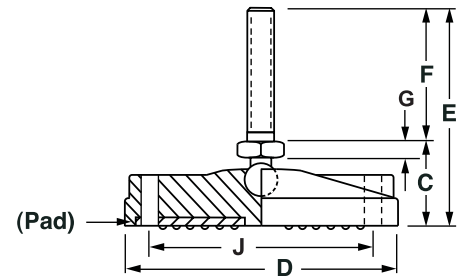
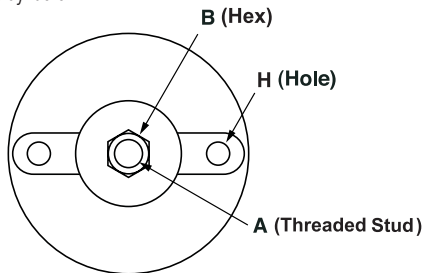
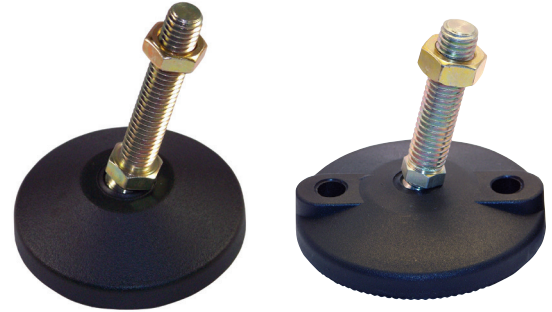

The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

#### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

#### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



#### Metric Threads: 1" to 4" Base Diameters

| Steel                                                    | Stainless       | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers—8" Stud and Rubber Pad</b> |                 |      |          |     |       |       |       |   |      |     |     |
| IL90-M12GX8-P                                            | IL90-M12SX8-P   | 2000 | M12X1.75 | 1/2 | 1     | 1     | 9     | 8 | 3/16 | -   | -   |
| IL90-M16GX8-P                                            | IL90-M16SX8-P   | 2000 | M16X2.00 | 5/8 | 1     | 1     | 9     | 8 | 3/16 | -   | -   |
| IL90-M20GX8-P                                            | IL90-M20SX8-P   | 2000 | M20X2.50 | 3/4 | 1     | 1     | 9     | 8 | 3/16 | -   | -   |
| IL90-M24GX8-P                                            | IL90-M24SX8-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1     | 9 1/4 | 8 | 7/16 | -   | -   |
| IL92-M12GX8-P                                            | IL92-M12SX8-P   | 2000 | M12X1.75 | 1/2 | 1     | 1 1/2 | 9     | 8 | 3/16 | -   | -   |
| IL92-M16GX8-P                                            | IL92-M16SX8-P   | 2000 | M16X2.00 | 5/8 | 1     | 1 1/2 | 9     | 8 | 3/16 | -   | -   |
| IL92-M20GX8-P                                            | IL92-M20SX8-P   | 2000 | M20X2.50 | 3/4 | 1     | 1 1/2 | 9     | 8 | 3/16 | -   | -   |
| IL92-M24GX8-P                                            | IL92-M24SX8-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1 1/2 | 9 1/4 | 8 | 7/16 | -   | -   |
| IL94-M12GX8-P                                            | IL94-M12SX8-P   | 2500 | M12X1.75 | 1/2 | 1     | 2 3/8 | 9     | 8 | 3/16 | -   | -   |
| IL94-M16GX8-P                                            | IL94-M16SX8-P   | 2500 | M16X2.00 | 5/8 | 1     | 2 3/8 | 9     | 8 | 3/16 | -   | -   |
| IL94-M20GX8-P                                            | IL94-M20SX8-P   | 2500 | M20X2.50 | 3/4 | 1     | 2 3/8 | 9     | 8 | 3/16 | -   | -   |
| IL94-M24GX8-P                                            | IL94-M24SX8-P   | 2500 | M24X3.00 | 1   | 1 1/4 | 2 3/8 | 9 1/4 | 8 | 7/16 | -   | -   |
| IL96-M12GX8-H-P                                          | IL96-M12SX8-H-P | 3000 | M12X1.75 | 1/2 | 1     | 3 1/8 | 9     | 8 | 3/16 | .39 | 2.2 |
| IL96-M16GX8-H-P                                          | IL96-M16SX8-H-P | 3000 | M16X2.00 | 5/8 | 1     | 3 1/8 | 9     | 8 | 3/16 | .39 | 2.2 |
| IL96-M20GX8-H-P                                          | IL96-M20SX8-H-P | 3000 | M20X2.50 | 3/4 | 1     | 3 1/8 | 9     | 8 | 3/16 | .39 | 2.2 |
| IL96-M24GX8-H-P                                          | IL96-M24SX8-H-P | 3000 | M24X3.00 | 1   | 1 1/4 | 3 1/8 | 9 1/4 | 8 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 8" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

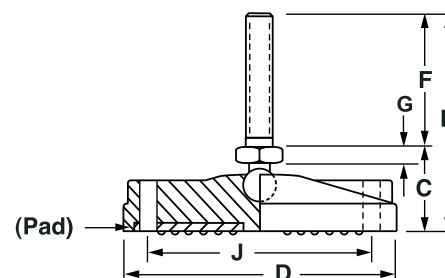
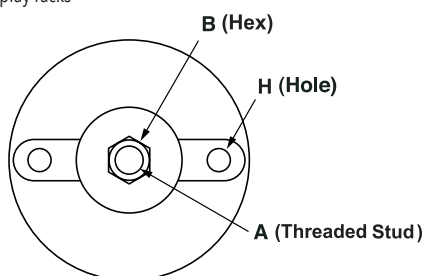

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless        | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|------------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-8" Stud and Rubber Pad</b> |                  |      |          |     |       |    |       |   |      |     |     |
| IL98-M12GX8-H-P                                          | IL98-M12SX8-H-P  | 3000 | M12X1.75 | 1/2 | 1 1/4 | 4  | 9 1/4 | 8 | 3/16 | .51 | 2.9 |
| IL98-M16GX8-H-P                                          | IL98-M16SX8-H-P  | 3000 | M16X2.00 | 5/8 | 1 1/4 | 4  | 9 1/4 | 8 | 3/16 | .51 | 2.9 |
| IL98-M20GX8-H-P                                          | IL98-M20SX8-H-P  | 3000 | M20X2.50 | 3/4 | 1 1/4 | 4  | 9 1/4 | 8 | 3/16 | .51 | 2.9 |
| IL98-M24GX8-H-P                                          | IL98-M24SX8-H-P  | 3000 | M24X3.00 | 1   | 1 1/2 | 4  | 9 1/2 | 8 | 7/16 | .51 | 2.9 |
| IL98A-M12GX8-H-P                                         | IL98A-M12SX8-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 6  | 9 1/4 | 8 | 3/16 | .51 | 4.9 |
| IL98A-M16GX8-H-P                                         | IL98A-M16SX8-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 6  | 9 1/4 | 8 | 3/16 | .51 | 4.9 |
| IL98A-M20GX8-H-P                                         | IL98A-M20SX8-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 6  | 9 1/4 | 8 | 3/16 | .51 | 4.9 |
| IL98A-M24GX8-H-P                                         | IL98A-M24SX8-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 6  | 9 1/2 | 8 | 7/16 | .51 | 4.9 |
| IL98B-M12GX8-H-P                                         | IL98B-M12SX8-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 8  | 9 1/4 | 8 | 3/16 | .51 | 6.9 |
| IL98B-M16GX8-H-P                                         | IL98B-M16SX8-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 8  | 9 1/4 | 8 | 3/16 | .51 | 6.9 |
| IL98B-M20GX8-H-P                                         | IL98B-M20SX8-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 8  | 9 1/4 | 8 | 3/16 | .51 | 6.9 |
| IL98B-M24GX8-H-P                                         | IL98B-M24SX8-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 8  | 9 1/2 | 8 | 7/16 | .51 | 6.9 |
| IL98C-M12GX8-H-P                                         | IL98C-M12SX8-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 10 | 9 1/4 | 8 | 3/16 | .51 | 8.9 |
| IL98C-M16GX8-H-P                                         | IL98C-M16SX8-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 10 | 9 1/4 | 8 | 3/16 | .51 | 8.9 |
| IL98C-M20GX8-H-P                                         | IL98C-M20SX8-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 10 | 9 1/4 | 8 | 3/16 | .51 | 8.9 |
| IL98C-M24GX8-H-P                                         | IL98C-M24SX8-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 10 | 9 1/2 | 8 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |