

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 1" &amp; 2" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

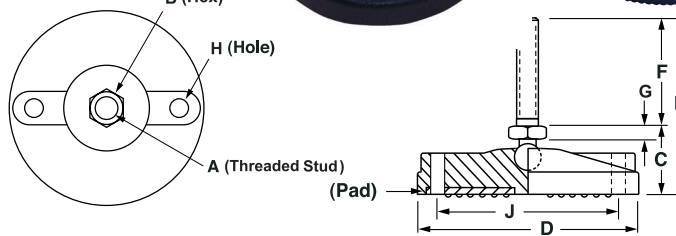
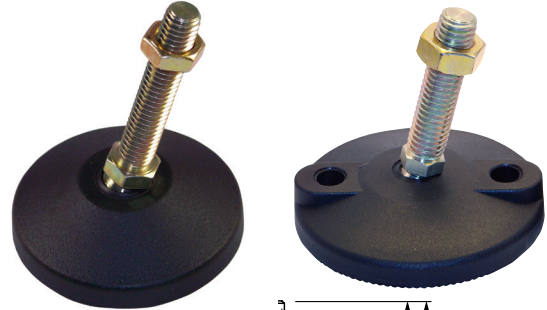

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- M6 & M8 available in 1" (25mm) length
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 1" to 4" Base Diameters**

| Steel                                                    | Stainless      | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers–2" Stud and Rubber Pad</b> |                |      |          |     |       |       |       |   |      |     |     |
| IL90-M6Gx1-P                                             | IL90-M6Sx1-P   | 100  | M6X1     | 1/2 | 1     | 1     | 2     | 1 | 3/16 | -   | -   |
| IL90-M8Gx1-P                                             | IL90-M8Sx1-P   | 500  | M8X1.25  | 1/2 | 1     | 1     | 2     | 1 | 3/16 | -   | -   |
| IL90-M6G-P                                               | IL90-M6S-P     | 100  | M6X1     | 1/2 | 1     | 1     | 3     | 2 | 3/16 | -   | -   |
| IL90-M8G-P                                               | IL90-M8S-P     | 500  | M8X1.25  | 1/2 | 1     | 1     | 2     | 2 | 3/16 | -   | -   |
| IL90-M10G-P                                              | IL90-M10S-P    | 2000 | M10X1.50 | 1/2 | 1     | 1     | 3     | 2 | 3/16 | -   | -   |
| IL90-M12G-P                                              | IL90-M12S-P    | 2000 | M12X1.75 | 1/2 | 1     | 1     | 3     | 2 | 3/16 | -   | -   |
| IL90-M16G-P                                              | IL90-M16S-P    | 2000 | M16X2.00 | 5/8 | 1     | 1     | 3     | 2 | 3/16 | -   | -   |
| IL90-M20G-P                                              | IL90-M20S-P    | 2000 | M20X2.50 | 3/4 | 1     | 1     | 3     | 2 | 3/16 | -   | -   |
| IL90-M24G-P                                              | IL90-M24S-P    | 2000 | M24X3.00 | 1   | 1-1/4 | 1     | 3-1/4 | 2 | 7/16 | -   | -   |
| IL92-M6Gx1-P                                             | IL92-M6Sx1-P   | 100  | M6X1     | 1/2 | 1     | 1-1/2 | 2     | 1 | 3/16 | -   | -   |
| IL92-M8Gx1-P                                             | IL92-M8Sx1-P   | 500  | M8X1.25  | 1/2 | 1     | 1-1/2 | 2     | 1 | 3/16 | -   | -   |
| IL92-M6G-P                                               | IL92-M6S-P     | 100  | M6X1     | 1/2 | 1     | 1-1/2 | 3     | 2 | 3/16 | -   | -   |
| IL92-M8G-P                                               | IL92-M8S-P     | 500  | M8X1.25  | 1/2 | 1     | 1-1/2 | 2     | 2 | 3/16 | -   | -   |
| IL92-M10G-P                                              | IL92-M10S-P    | 2000 | M10X1.50 | 1/2 | 1     | 1-1/2 | 3     | 2 | 3/16 | -   | -   |
| IL92-M12G-P                                              | IL92-M12S-P    | 2000 | M12X1.75 | 1/2 | 1     | 1-1/2 | 3     | 2 | 3/16 | -   | -   |
| IL92-M16G-P                                              | IL92-M16S-P    | 2000 | M16X2.00 | 5/8 | 1     | 1-1/2 | 3     | 2 | 3/16 | -   | -   |
| IL92-M20G-P                                              | IL92-M20S-P    | 2000 | M20X2.50 | 3/4 | 1     | 1-1/2 | 3     | 2 | 3/16 | -   | -   |
| IL92-M24G-P                                              | IL92-M24S-P    | 2000 | M24X3.00 | 1   | 1-1/4 | 1-1/2 | 3-1/4 | 2 | 7/16 | -   | -   |
| IL94-M6Gx1-P                                             | IL94-M6Sx1-P   | 100  | M6X1     | 1/2 | 1     | 2-3/8 | 2     | 1 | 3/16 | -   | -   |
| IL94-M8Gx1-P                                             | IL94-M8Sx1-P   | 500  | M8X1.25  | 1/2 | 1     | 2-3/8 | 2     | 1 | 3/16 | -   | -   |
| IL94-M6G-P                                               | IL94-M6S-P     | 100  | M6X1     | 1/2 | 1     | 2-3/8 | 3     | 2 | 3/16 | -   | -   |
| IL94-M8G-P                                               | IL94-M8S-P     | 500  | M8X1.25  | 1/2 | 1     | 2-3/8 | 2     | 2 | 3/16 | -   | -   |
| IL94-M10G-P                                              | IL94-M10S-P    | 2500 | M10X1.50 | 1/2 | 1     | 2-3/8 | 3     | 2 | 3/16 | -   | -   |
| IL94-M12G-P                                              | IL94-M12S-P    | 2500 | M12X1.75 | 1/2 | 1     | 2-3/8 | 3     | 2 | 3/16 | -   | -   |
| IL94-M16G-P                                              | IL94-M16S-P    | 2500 | M16X2.00 | 5/8 | 1     | 2-3/8 | 3     | 2 | 3/16 | -   | -   |
| IL94-M20G-P                                              | IL94-M20S-P    | 2500 | M20X2.50 | 3/4 | 1     | 2-3/8 | 3     | 2 | 3/16 | -   | -   |
| IL94-M24G-P                                              | IL94-M24S-P    | 2500 | M24X3.00 | 1   | 1-1/4 | 2-3/8 | 3-1/4 | 2 | 7/16 | -   | -   |
| IL96-M6Gx1-H-P                                           | IL96-M6Sx1-H-P | 100  | M6X1     | 1/2 | 1     | 3-1/8 | 2     | 1 | 3/16 | .39 | 2.2 |
| IL96-M8Gx1-H-P                                           | IL96-M8Sx1-H-P | 500  | M8X1.25  | 1/2 | 1     | 3-1/8 | 2     | 1 | 3/16 | .39 | 2.2 |
| IL96-M6G-H-P                                             | IL96-M6S-H-P   | 100  | M6X1     | 1/2 | 1     | 3-1/8 | 3     | 2 | 3/16 | .39 | 2.2 |
| IL96-M8G-H-P                                             | IL96-M8S-H-P   | 500  | M8X1.25  | 1/2 | 1     | 3-1/8 | 2     | 2 | 3/16 | .39 | 2.2 |
| IL96-M10G-H-P                                            | IL96-M10S-H-P  | 3000 | M10X1.50 | 1/2 | 1     | 3-1/8 | 3     | 2 | 3/16 | .39 | 2.2 |
| IL96-M12G-H-P                                            | IL96-M12S-H-P  | 3000 | M12X1.75 | 1/2 | 1     | 3-1/8 | 3     | 2 | 3/16 | .39 | 2.2 |
| IL96-M16G-H-P                                            | IL96-M16S-H-P  | 3000 | M16X2.00 | 5/8 | 1     | 3-1/8 | 3     | 2 | 3/16 | .39 | 2.2 |
| IL96-M20G-H-P                                            | IL96-M20S-H-P  | 3000 | M20X2.50 | 3/4 | 1     | 3-1/8 | 3     | 2 | 3/16 | .39 | 2.2 |
| IL96-M24G-H-P                                            | IL96-M24S-H-P  | 3000 | M24X3.00 | 1   | 1-1/4 | 3-1/8 | 3-1/4 | 2 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 1" &amp; 2" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

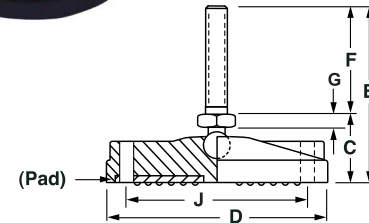


The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless       | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-2" Stud and Rubber Pad</b> |                 |      |          |     |       |    |       |   |      |     |     |
| IL98-M6Gx1-H-P                                           | IL98-M6Sx1-H-P  | 100  | M6X1     | 1/2 | 1-1/4 | 4  | 2-1/4 | 1 | 3/16 | .51 | 2.9 |
| IL98-M8Gx1-H-P                                           | IL98-M8Sx1-H-P  | 500  | M8X1.25  | 1/2 | 1-1/4 | 4  | 2-1/4 | 1 | 3/16 | .51 | 2.9 |
| IL98-M6G-H-P                                             | IL98-M6S-H-P    | 100  | M6X1     | 1/2 | 1-1/4 | 4  | 3-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M8G-H-P                                             | IL98-M8S-H-P    | 500  | M8X1.25  | 1/2 | 1-1/4 | 4  | 2-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M10G-H-P                                            | IL98-M10S-H-P   | 3000 | M10X1.50 | 1/2 | 1-1/4 | 4  | 3-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M12G-H-P                                            | IL98-M12S-H-P   | 3000 | M12X1.75 | 1/2 | 1-1/4 | 4  | 3-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M16G-H-P                                            | IL98-M16S-H-P   | 3000 | M16X2.00 | 5/8 | 1-1/4 | 4  | 3-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M20G-H-P                                            | IL98-M20S-H-P   | 3000 | M20X2.50 | 3/4 | 1-1/4 | 4  | 3-1/4 | 2 | 3/16 | .51 | 2.9 |
| IL98-M24G-H-P                                            | IL98-M24S-H-P   | 3000 | M24X3.00 | 1   | 1-1/2 | 4  | 3-1/2 | 2 | 7/16 | .51 | 2.9 |
| IL98A-M6Gx1-H-P                                          | IL98A-M6Sx1-H-P | 100  | M6X1     | 1/2 | 1-1/4 | 6  | 2-1/4 | 1 | 3/16 | .51 | 4.9 |
| IL98A-M8Gx1-H-P                                          | IL98A-M8Sx1-H-P | 500  | M8X1.25  | 1/2 | 1-1/4 | 6  | 2-1/4 | 1 | 3/16 | .51 | 4.9 |
| IL98A-M6G-H-P                                            | IL98A-M6S-H-P   | 100  | M6X1     | 1/2 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M8G-H-P                                            | IL98A-M8S-H-P   | 500  | M8X1.25  | 1/2 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M10G-H-P                                           | IL98A-M10S-H-P  | 3000 | M10X1.50 | 1/2 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M12G-H-P                                           | IL98A-M12S-H-P  | 3000 | M12X1.75 | 1/2 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M16G-H-P                                           | IL98A-M16S-H-P  | 3000 | M16X2.00 | 5/8 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M20G-H-P                                           | IL98A-M20S-H-P  | 3000 | M20X2.50 | 3/4 | 1-1/4 | 6  | 3-1/4 | 2 | 3/16 | .51 | 4.9 |
| IL98A-M24G-H-P                                           | IL98A-M24S-H-P  | 3000 | M24X3.00 | 1   | 1-1/2 | 6  | 3-1/2 | 2 | 7/16 | .51 | 4.9 |
| IL98B-M6Gx1-H-P                                          | IL98B-M6Sx1-H-P | 100  | M6X1     | 1/2 | 1-1/4 | 8  | 2-1/4 | 1 | 3/16 | .51 | 6.9 |
| IL98B-M8Gx1-H-P                                          | IL98B-M8Sx1-H-P | 500  | M8X1.25  | 1/2 | 1-1/4 | 8  | 2-1/4 | 1 | 3/16 | .51 | 6.9 |
| IL98B-M6G-H-P                                            | IL98B-M6S-H-P   | 100  | M6X1     | 1/2 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M8G-H-P                                            | IL98B-M8S-H-P   | 500  | M8X1.25  | 1/2 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M10G-H-P                                           | IL98B-M10S-H-P  | 3000 | M10X1.50 | 1/2 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M12G-H-P                                           | IL98B-M12S-H-P  | 3000 | M12X1.75 | 1/2 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M16G-H-P                                           | IL98B-M16S-H-P  | 3000 | M16X2.00 | 5/8 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M20G-H-P                                           | IL98B-M20S-H-P  | 3000 | M20X2.50 | 3/4 | 1-1/4 | 8  | 3-1/4 | 2 | 3/16 | .51 | 6.9 |
| IL98B-M24G-H-P                                           | IL98B-M24S-H-P  | 3000 | M24X3.00 | 1   | 1-1/2 | 8  | 3-1/2 | 2 | 7/16 | .51 | 6.9 |
| IL98C-M6Gx1-H-P                                          | IL98C-M6Sx1-H-P | 100  | M6X1     | 1/2 | 1-1/4 | 10 | 2-1/4 | 1 | 3/16 | .51 | 8.9 |
| IL98C-M8Gx1-H-P                                          | IL98C-M8Sx1-H-P | 500  | M8X1.25  | 1/2 | 1-1/4 | 10 | 2-1/4 | 1 | 3/16 | .51 | 8.9 |
| IL98C-M6G-H-P                                            | IL98C-M6S-H-P   | 100  | M6X1     | 1/2 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M8G-H-P                                            | IL98C-M8S-H-P   | 500  | M8X1.25  | 1/2 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M10G-H-P                                           | IL98C-M10S-H-P  | 3000 | M10X1.50 | 1/2 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M12G-H-P                                           | IL98C-M12S-H-P  | 3000 | M12X1.75 | 1/2 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M16G-H-P                                           | IL98C-M16S-H-P  | 3000 | M16X2.00 | 5/8 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M20G-H-P                                           | IL98C-M20S-H-P  | 3000 | M20X2.50 | 3/4 | 1-1/4 | 10 | 3-1/4 | 2 | 3/16 | .51 | 8.9 |
| IL98C-M24G-H-P                                           | IL98C-M24S-H-P  | 3000 | M24X3.00 | 1   | 1-1/2 | 10 | 3-1/2 | 2 | 7/16 | .51 | 8.9 |

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 3" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

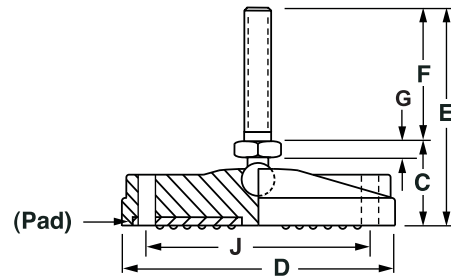


The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 1" to 4" Base Diameters**

| Steel                                                    | Stainless       | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-3" Stud and Rubber Pad</b> |                 |      |          |     |       |       |       |   |      |     |     |
| IL90-M6GX3-P                                             | IL90-M6SX3-P    | 100  | M6X1     | 1/2 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M8GX3-P                                             | IL90-M8SX3-P    | 500  | M8X1.25  | 1/2 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M10GX3-P                                            | IL90-M10SX3-P   | 2000 | M10X1.50 | 1/2 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M12GX3-P                                            | IL90-M12SX3-P   | 2000 | M12X1.75 | 1/2 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M16GX3-P                                            | IL90-M16SX3-P   | 2000 | M16X2.00 | 5/8 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M20GX3-P                                            | IL90-M20SX3-P   | 2000 | M20X2.50 | 3/4 | 1     | 1     | 4     | 3 | 3/16 | -   | -   |
| IL90-M24GX3-P                                            | IL90-M24SX3-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1     | 4 1/4 | 3 | 7/16 | -   | -   |
| IL92-M6GX3-P                                             | IL92-M6SX3-P    | 100  | M6X1     | 1/2 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M8GX3-P                                             | IL92-M8SX3-P    | 500  | M8X1.25  | 1/2 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M10GX3-P                                            | IL92-M10SX3-P   | 2000 | M10X1.50 | 1/2 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M12GX3-P                                            | IL92-M12SX3-P   | 2000 | M12X1.75 | 1/2 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M16GX3-P                                            | IL92-M16SX3-P   | 2000 | M16X2.00 | 5/8 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M20GX3-P                                            | IL92-M20SX3-P   | 2000 | M20X2.50 | 3/4 | 1     | 1 1/2 | 4     | 3 | 3/16 | -   | -   |
| IL92-M24GX3-P                                            | IL92-M24SX3-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1 1/2 | 4 1/4 | 3 | 7/16 | -   | -   |
| IL94-M6GX3-P                                             | IL94-M6SX3-P    | 100  | M6X1     | 1/2 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M8GX3-P                                             | IL94-M8SX3-P    | 500  | M8X1.25  | 1/2 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M10GX3-P                                            | IL94-M10SX3-P   | 2500 | M10X1.50 | 1/2 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M12GX3-P                                            | IL94-M12SX3-P   | 2500 | M12X1.75 | 1/2 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M16GX3-P                                            | IL94-M16SX3-P   | 2500 | M16X2.00 | 5/8 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M20GX3-P                                            | IL94-M20SX3-P   | 2500 | M20X2.50 | 3/4 | 1     | 2 3/8 | 4     | 3 | 3/16 | -   | -   |
| IL94-M24GX3-P                                            | IL94-M24SX3-P   | 2500 | M24X3.00 | 1   | 1 1/4 | 2 3/8 | 4 1/4 | 3 | 7/16 | -   | -   |
| IL96-M6GX3-H-P                                           | IL96-M6SX3-H-P  | 100  | M6X1     | 1/2 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M8GX3-H-P                                           | IL96-M8SX3-H-P  | 500  | M8X1.25  | 1/2 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M10GX3-H-P                                          | IL96-M10SX3-H-P | 3000 | M10X1.50 | 1/2 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M12GX3-H-P                                          | IL96-M12SX3-H-P | 3000 | M12X1.75 | 1/2 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M16GX3-H-P                                          | IL96-M16SX3-H-P | 3000 | M16X2.00 | 5/8 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M20GX3-H-P                                          | IL96-M20SX3-H-P | 3000 | M20X2.50 | 3/4 | 1     | 3 1/8 | 4     | 3 | 3/16 | .39 | 2.2 |
| IL96-M24GX3-H-P                                          | IL96-M24SX3-H-P | 3000 | M24X3.00 | 1   | 1 1/4 | 3 1/8 | 4 1/4 | 3 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 3" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

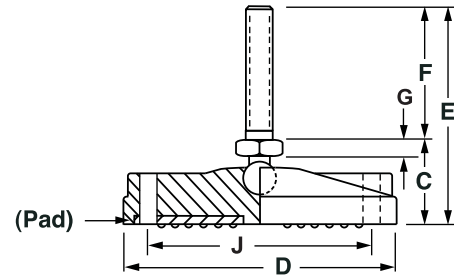
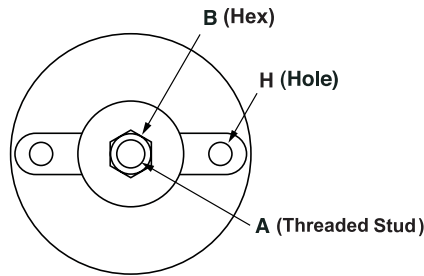
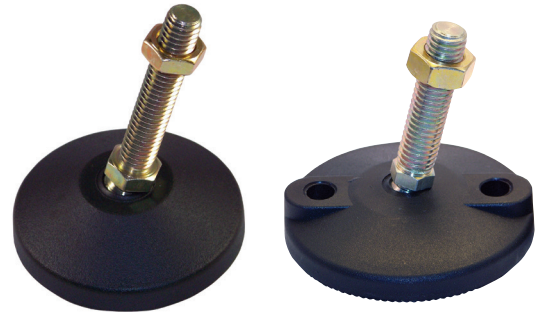

The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless        | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|------------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-3" Stud and Rubber Pad</b> |                  |      |          |     |       |    |       |   |      |     |     |
| IL98-M6GX3-H-P                                           | IL98-M6SX3-H-P   | 100  | M6X1     | 1/2 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M8GX3-H-P                                           | IL98-M8SX3-H-P   | 500  | M8X1.25  | 1/2 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M10GX3-H-P                                          | IL98-M10SX3-H-P  | 3000 | M10X1.50 | 1/2 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M12GX3-H-P                                          | IL98-M12SX3-H-P  | 3000 | M12X1.75 | 1/2 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M16GX3-H-P                                          | IL98-M16SX3-H-P  | 3000 | M16X2.00 | 5/8 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M20GX3-H-P                                          | IL98-M20SX3-H-P  | 3000 | M20X2.50 | 3/4 | 1 1/4 | 4  | 4 1/4 | 3 | 3/16 | .51 | 2.9 |
| IL98-M24GX3-H-P                                          | IL98-M24SX3-H-P  | 3000 | M24X3.00 | 1   | 1 1/2 | 4  | 4 1/2 | 3 | 7/16 | .51 | 2.9 |
| IL98A-M6GX3-H-P                                          | IL98A-M6SX3-H-P  | 100  | M6X1     | 1/2 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M8GX3-H-P                                          | IL98A-M8SX3-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M10GX3-H-P                                         | IL98A-M10SX3-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M12GX3-H-P                                         | IL98A-M12SX3-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M16GX3-H-P                                         | IL98A-M16SX3-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M20GX3-H-P                                         | IL98A-M20SX3-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 6  | 4 1/4 | 3 | 3/16 | .51 | 4.9 |
| IL98A-M24GX3-H-P                                         | IL98A-M24SX3-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 6  | 4 1/2 | 3 | 7/16 | .51 | 4.9 |
| IL98B-M6GX3-H-P                                          | IL98B-M6SX3-H-P  | 100  | M6X1     | 1/2 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M8GX3-H-P                                          | IL98B-M8SX3-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M10GX3-H-P                                         | IL98B-M10SX3-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M12GX3-H-P                                         | IL98B-M12SX3-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M16GX3-H-P                                         | IL98B-M16SX3-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M20GX3-H-P                                         | IL98B-M20SX3-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 8  | 4 1/4 | 3 | 3/16 | .51 | 6.9 |
| IL98B-M24GX3-H-P                                         | IL98B-M24SX3-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 8  | 4 1/2 | 3 | 7/16 | .51 | 6.9 |
| IL98C-M6GX3-H-P                                          | IL98C-M6SX3-H-P  | 100  | M6X1     | 1/2 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M8GX3-H-P                                          | IL98C-M8SX3-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M10GX3-H-P                                         | IL98C-M10SX3-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M12GX3-H-P                                         | IL98C-M12SX3-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M16GX3-H-P                                         | IL98C-M16SX3-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M20GX3-H-P                                         | IL98C-M20SX3-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 10 | 4 1/4 | 3 | 3/16 | .51 | 8.9 |
| IL98C-M24GX3-H-P                                         | IL98C-M24SX3-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 10 | 4 1/2 | 3 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."  
To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 4" STUD

**NYLON METRIC SWIVEL STUD STYLE  
LEVELERS – with Rubber Pad**

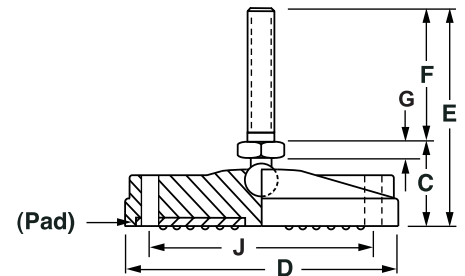
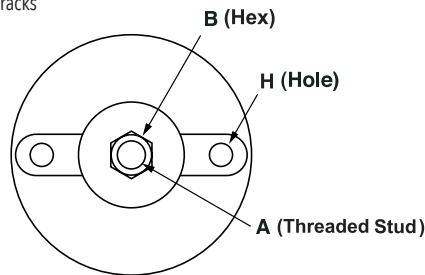
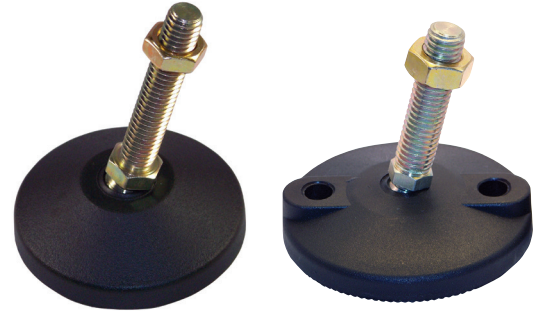

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 1" to 4" Base Diameters**

| Steel                                                    | Stainless       | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-4" Stud and Rubber Pad</b> |                 |      |          |     |       |       |       |   |      |     |     |
| IL90-M8GX4-P                                             | IL90-M8SX4-P    | 500  | M8X1.25  | 1/2 | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-M10GX4-P                                            | IL90-M10SX4-P   | 2000 | M10X1.50 | 1/2 | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-M12GX4-P                                            | IL90-M12SX4-P   | 2000 | M12X1.75 | 5/8 | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-M16GX4-P                                            | IL90-M16SX4-P   | 2000 | M16X2.00 | 3/4 | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-M20GX4-P                                            | IL90-M20SX4-P   | 2000 | M20X2.50 | 3/4 | 1     | 1     | 5     | 4 | 3/16 | -   | -   |
| IL90-M24GX4-P                                            | IL90-M24SX4-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1     | 5 1/4 | 4 | 7/16 | -   | -   |
| IL92-M8GX4-P                                             | IL92-M8SX4-P    | 500  | M8X1.25  | 1/2 | 1     | 1 1/2 | 5     | 4 | 3/16 | -   | -   |
| IL92-M10GX4-P                                            | IL92-M10SX4-P   | 2000 | M10X1.50 | 1/2 | 1     | 1 1/2 | 5     | 4 | 3/16 | -   | -   |
| IL92-M12GX4-P                                            | IL92-M12SX4-P   | 2000 | M12X1.75 | 5/8 | 1     | 1 1/2 | 5     | 4 | 3/16 | -   | -   |
| IL92-M16GX4-P                                            | IL92-M16SX4-P   | 2000 | M16X2.00 | 3/4 | 1     | 1 1/2 | 5     | 4 | 3/16 | -   | -   |
| IL92-M20GX4-P                                            | IL92-M20SX4-P   | 2000 | M20X2.50 | 3/4 | 1     | 1 1/2 | 5     | 4 | 3/16 | -   | -   |
| IL92-M24GX4-P                                            | IL92-M24SX4-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1 1/2 | 5 1/4 | 4 | 7/16 | -   | -   |
| IL94-M8GX4-P                                             | IL94-M8SX4-P    | 500  | M8X1.25  | 1/2 | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-M10GX4-P                                            | IL94-M10SX4-P   | 2500 | M10X1.50 | 1/2 | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-M12GX4-P                                            | IL94-M12SX4-P   | 2500 | M12X1.75 | 5/8 | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-M16GX4-P                                            | IL94-M16SX4-P   | 2500 | M16X2.00 | 3/4 | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-M20GX4-P                                            | IL94-M20SX4-P   | 2500 | M20X2.50 | 3/4 | 1     | 2 3/8 | 5     | 4 | 3/16 | -   | -   |
| IL94-M24GX4-P                                            | IL94-M24SX4-P   | 2500 | M24X3.00 | 1   | 1 1/4 | 2 3/8 | 5 1/4 | 4 | 7/16 | -   | -   |
| IL96-M8GX4-H-P                                           | IL96-M8SX4-H-P  | 500  | M8X1.25  | 1/2 | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-M10X4-H-P                                           | IL96-M10SX4-H-P | 3000 | M10X1.50 | 1/2 | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-M12GX4-H-P                                          | IL96-M12SX4-H-P | 3000 | M12X1.75 | 5/8 | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-M16GX4-H-P                                          | IL96-M16SX4-H-P | 3000 | M16X2.00 | 3/4 | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-M20GX4-H-P                                          | IL96-M20SX4-H-P | 3000 | M20X2.50 | 3/4 | 1     | 3 1/8 | 5     | 4 | 3/16 | .39 | 2.2 |
| IL96-M24GX4-H-P                                          | IL96-M24SX4-H-P | 3000 | M24X3.00 | 1   | 1 1/4 | 3 1/8 | 5 1/4 | 4 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |





**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

## MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 4" STUD

### NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

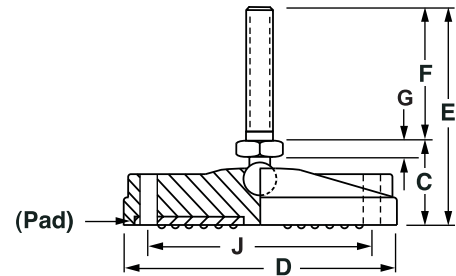
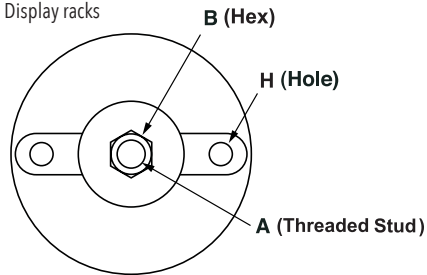
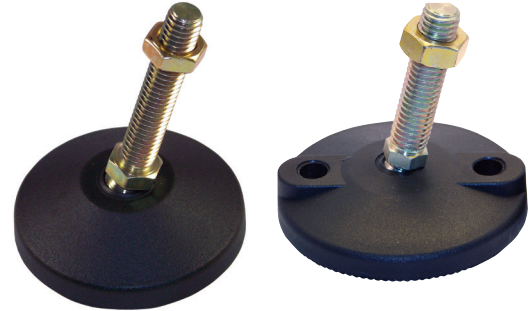

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

#### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

#### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



#### Metric Threads: 4", 6", 8" & 10" Base Diameters

| Steel                                                    | Stainless        | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|------------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-4" Stud and Rubber Pad</b> |                  |      |          |     |       |    |       |   |      |     |     |
| IL98-M8GX4-H-P                                           | IL98-M8SX4-H-P   | 500  | M8X1.25  | 1/2 | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-M10GX4-H-P                                          | IL98-M10SX4-H-P  | 3000 | M10X1.50 | 1/2 | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-M12GX4-H-P                                          | IL98-M12SX4-H-P  | 3000 | M12X1.75 | 5/8 | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-M16GX4-H-P                                          | IL98-M16SX4-H-P  | 3000 | M16X2.00 | 3/4 | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-M20GX4-H-P                                          | IL98-M20SX4-H-P  | 3000 | M20X2.50 | 3/4 | 1 1/4 | 4  | 5 1/4 | 4 | 3/16 | .51 | 2.9 |
| IL98-M24GX4-H-P                                          | IL98-M24SX4-H-P  | 3000 | M24X3.00 | 1   | 1 1/2 | 4  | 5 1/2 | 4 | 7/16 | .51 | 2.9 |
| IL98A-M8GX4-H-P                                          | IL98A-M8SX4-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-M10GX4-H-P                                         | IL98A-M10SX4-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-M12GX4-H-P                                         | IL98A-M12SX4-H-P | 3000 | M12X1.75 | 5/8 | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-M16GX4-H-P                                         | IL98A-M16SX4-H-P | 3000 | M16X2.00 | 3/4 | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-M20GX4-H-P                                         | IL98A-M20SX4-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 6  | 5 1/4 | 4 | 3/16 | .51 | 4.9 |
| IL98A-M24GX4-H-P                                         | IL98A-M24SX4-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 6  | 5 1/2 | 4 | 7/16 | .51 | 4.9 |
| IL98B-M8GX4-H-P                                          | IL98B-M8SX4-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-M10GX4-H-P                                         | IL98B-M10SX4-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-M12GX4-H-P                                         | IL98B-M12SX4-H-P | 3000 | M12X1.75 | 5/8 | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-M16GX4-H-P                                         | IL98B-M16SX4-H-P | 3000 | M16X2.00 | 3/4 | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-M20GX4-H-P                                         | IL98B-M20SX4-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 8  | 5 1/4 | 4 | 3/16 | .51 | 6.9 |
| IL98B-M24GX4-H-P                                         | IL98B-M24SX4-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 8  | 5 1/2 | 4 | 7/16 | .51 | 6.9 |
| IL98C-M8GX4-H-P                                          | IL98C-M8SX4-H-P  | 500  | M8X1.25  | 1/2 | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-M10GX4-H-P                                         | IL98C-M10SX4-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-M12GX4-H-P                                         | IL98C-M12SX4-H-P | 3000 | M12X1.75 | 5/8 | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-M16GX4-H-P                                         | IL98C-M16SX4-H-P | 3000 | M16X2.00 | 3/4 | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-M20GX4-H-P                                         | IL98C-M20SX4-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 10 | 5 1/4 | 4 | 3/16 | .51 | 8.9 |
| IL98C-M24GX4-H-P                                         | IL98C-M24SX4-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 10 | 5 1/2 | 4 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."  
To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 5" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

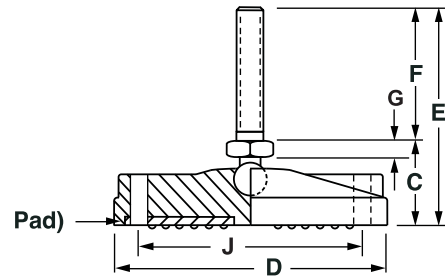
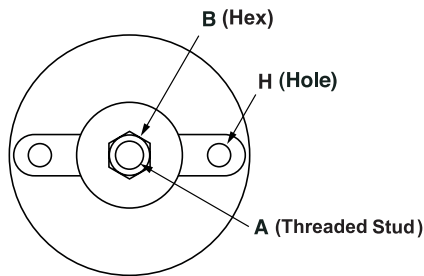

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 1" to 4" Base Diameters**

| Steel                                                    | Stainless       | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-5" Stud and Rubber Pad</b> |                 |      |          |     |       |       |       |   |      |     |     |
| IL90-M10GX5-P                                            | IL90-M10SX5-P   | 2000 | M10X1.50 | 1/2 | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-M12GX5-P                                            | IL90-M12SX5-P   | 2000 | M12X1.75 | 1/2 | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-M16GX5-P                                            | IL90-M16SX5-P   | 2000 | M16X2.00 | 5/8 | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-M20GX5-P                                            | IL90-M20SX5-P   | 2000 | M20X2.50 | 3/4 | 1     | 1     | 6     | 5 | 3/16 | -   | -   |
| IL90-M24GX5-P                                            | IL90-M24SX5-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1     | 6 1/4 | 5 | 7/16 | -   | -   |
| IL92-M10GX5-P                                            | IL92-M10SX5-P   | 2000 | M10X1.50 | 1/2 | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-M12GX5-P                                            | IL92-M12SX5-P   | 2000 | M12X1.75 | 1/2 | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-M16GX5-P                                            | IL92-M16SX5-P   | 2000 | M16X2.00 | 5/8 | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-M20GX5-P                                            | IL92-M20SX5-P   | 2000 | M20X2.50 | 3/4 | 1     | 1 1/2 | 6     | 5 | 3/16 | -   | -   |
| IL92-M24GX5-P                                            | IL92-M24SX5-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1 1/2 | 6 1/4 | 5 | 7/16 | -   | -   |
| IL94-M10GX5-P                                            | IL94-M10SX5-P   | 2500 | M10X1.50 | 1/2 | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-M12GX5-P                                            | IL94-M12SX5-P   | 2500 | M12X1.75 | 1/2 | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-M16GX5-P                                            | IL94-M16SX5-P   | 2500 | M16X2.00 | 5/8 | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-M20GX5-P                                            | IL94-M20SX5-P   | 2500 | M20X2.50 | 3/4 | 1     | 2 3/8 | 6     | 5 | 3/16 | -   | -   |
| IL94-M24GX5-P                                            | IL94-M24SX5-P   | 2500 | M24X3.00 | 1   | 1 1/4 | 2 3/8 | 6 1/4 | 5 | 7/16 | -   | -   |
| IL96-M10GX5-H-P                                          | IL96-M10SX5-H-P | 3000 | M10X1.50 | 1/2 | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-M12GX5-H-P                                          | IL96-M12SX5-H-P | 3000 | M12X1.75 | 1/2 | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-M16GX5-H-P                                          | IL96-M16SX5-H-P | 3000 | M16X2.00 | 5/8 | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-M20GX5-H-P                                          | IL96-M20SX5-H-P | 3000 | M20X2.50 | 3/4 | 1     | 3 1/8 | 6     | 5 | 3/16 | .39 | 2.2 |
| IL96-M24GX5-H-P                                          | IL96-M24SX5-H-P | 3000 | M24X3.00 | 1   | 1 1/4 | 3 1/8 | 6 1/4 | 5 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 5" STUD

**NYLON METRIC SWIVEL STUD STYLE****LEVELERS – with Rubber Pad**

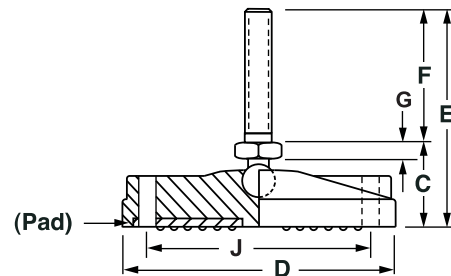
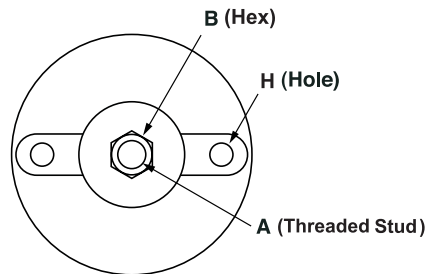
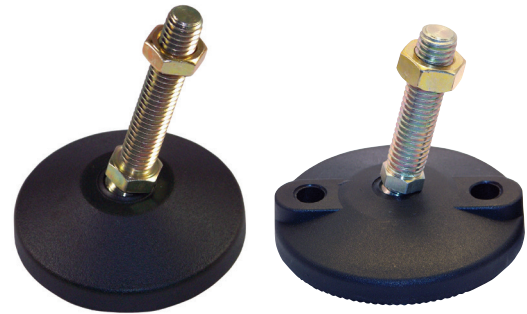

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless        | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|------------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-5" Stud and Rubber Pad</b> |                  |      |          |     |       |    |       |   |      |     |     |
| IL98-M10GX5-H-P                                          | IL98-M10SX5-H-P  | 3000 | M10X1.50 | 1/2 | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-M12GX5-H-P                                          | IL98-M12SX5-H-P  | 3000 | M12X1.75 | 1/2 | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-M16GX5-H-P                                          | IL98-M16SX5-H-P  | 3000 | M16X2.00 | 5/8 | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-M20GX5-H-P                                          | IL98-M20SX5-H-P  | 3000 | M20X2.50 | 3/4 | 1 1/4 | 4  | 6 1/4 | 5 | 3/16 | .51 | 2.9 |
| IL98-M24GX5-H-P                                          | IL98-M24SX5-H-P  | 3000 | M24X3.00 | 1   | 1 1/2 | 4  | 6 1/2 | 5 | 7/16 | .51 | 2.9 |
| IL98A-M10GX5-H-P                                         | IL98A-M10SX5-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-M12GX5-H-P                                         | IL98A-M12SX5-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-M16GX5-H-P                                         | IL98A-M16SX5-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-M20GX5-H-P                                         | IL98A-M20SX5-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 6  | 6 1/4 | 5 | 3/16 | .51 | 4.9 |
| IL98A-M24GX5-H-P                                         | IL98A-M24SX5-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 6  | 6 1/2 | 5 | 7/16 | .51 | 4.9 |
| IL98B-M10GX5-H-P                                         | IL98B-M10SX5-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-M12GX5-H-P                                         | IL98B-M12SX5-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-M16GX5-H-P                                         | IL98B-M16SX5-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-M20GX5-H-P                                         | IL98B-M20SX5-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 8  | 6 1/4 | 5 | 3/16 | .51 | 6.9 |
| IL98B-M24GX5-H-P                                         | IL98B-M24SX5-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 8  | 6 1/2 | 5 | 7/16 | .51 | 6.9 |
| IL98C-M10GX5-H-P                                         | IL98C-M10SX5-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-M12GX5-H-P                                         | IL98C-M12SX5-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-M16GX5-H-P                                         | IL98C-M16SX5-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-M20GX5-H-P                                         | IL98C-M20SX5-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 10 | 6 1/4 | 5 | 3/16 | .51 | 8.9 |
| IL98C-M24GX5-H-P                                         | IL98C-M24SX5-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 10 | 6 1/2 | 5 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."  
To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |





**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

## MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 6" STUD

### NYLON METRIC SWIVEL STUD STYLE

#### LEVELERS – with Rubber Pad

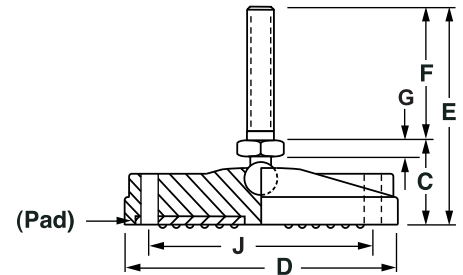
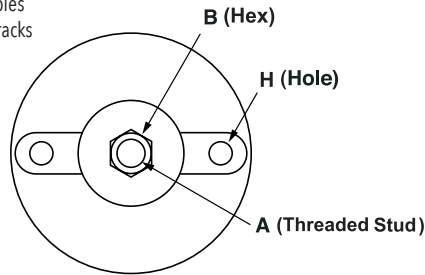

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

#### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

#### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



#### Metric Threads: 1" to 4" Base Diameters

| Steel                                                    | Stainless       | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-6" Stud and Rubber Pad</b> |                 |      |          |     |       |       |       |   |      |     |     |
| IL90-M8GX6-P                                             | IL90-M8SX6-P    | 2000 | M8X1.25  | 1/4 | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-M10GX6-P                                            | IL90-M10SX6-P   | 2000 | M10X1.50 | 1/2 | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-M12GX6-P                                            | IL90-M12SX6-P   | 2000 | M12X1.75 | 1/2 | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-M16GX6-P                                            | IL90-M16SX6-P   | 2000 | M16X2.00 | 5/8 | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-M20GX6-P                                            | IL90-M20SX6-P   | 2000 | M20X2.50 | 3/4 | 1     | 1     | 7     | 6 | 3/16 | -   | -   |
| IL90-M24GX6-P                                            | IL90-M24SX6-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1     | 7 1/4 | 6 | 7/16 | -   | -   |
| IL92-M8GX6-P                                             | IL92-M8SX6-P    | 2000 | M8X1.25  | 1/4 | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-M10GX6-P                                            | IL92-M10SX6-P   | 2000 | M10X1.50 | 1/2 | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-M12GX6-P                                            | IL92-M12SX6-P   | 2000 | M12X1.75 | 1/2 | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-M16GX6-P                                            | IL92-M16SX6-P   | 2000 | M16X2.00 | 5/8 | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-M20GX6-P                                            | IL92-M20SX6-P   | 2000 | M20X2.50 | 3/4 | 1     | 1 1/2 | 7     | 6 | 3/16 | -   | -   |
| IL92-M24GX6-P                                            | IL92-M24SX6-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1 1/2 | 7 1/4 | 6 | 7/16 | -   | -   |
| IL94-M8GX6-P                                             | IL94-M8SX6-P    | 2500 | M8X1.25  | 1/4 | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-M10GX6-P                                            | IL94-M10SX6-P   | 2500 | M10X1.50 | 1/2 | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-M12GX6-P                                            | IL94-M12SX6-P   | 2500 | M12X1.75 | 1/2 | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-M16GX6-P                                            | IL94-M16SX6-P   | 2500 | M16X2.00 | 5/8 | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-M20GX6-P                                            | IL94-M20SX6-P   | 2500 | M20X2.50 | 3/4 | 1     | 2 3/8 | 7     | 6 | 3/16 | -   | -   |
| IL94-M24GX6-P                                            | IL94-M24SX6-P   | 2500 | M24X3.00 | 1   | 1 1/4 | 2 3/8 | 7 1/4 | 6 | 7/16 | -   | -   |
| IL96-M8GX6-H-P                                           | IL96-M8SX6-H-P  | 3000 | M8X1.25  | 1/4 | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-M10GX6-H-P                                          | IL96-M10SX6-H-P | 3000 | M10X1.50 | 1/2 | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-M12GX6-H-P                                          | IL96-M12SX6-H-P | 3000 | M12X1.75 | 1/2 | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-M16GX6-H-P                                          | IL96-M16SX6-H-P | 3000 | M16X2.00 | 5/8 | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-M20GX6-H-P                                          | IL96-M20SX6-H-P | 3000 | M20X2.50 | 3/4 | 1     | 3 1/8 | 7     | 6 | 3/16 | .39 | 2.2 |
| IL96-M24GX6-H-P                                          | IL96-M24SX6-H-P | 3000 | M24X3.00 | 1   | 1 1/4 | 3 1/8 | 7 1/4 | 6 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

## MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 6" STUD

### NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad

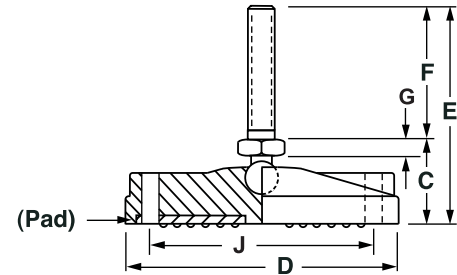
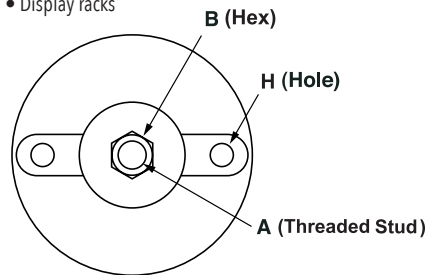

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

#### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

#### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



#### Metric Threads: 4", 6", 8" & 10" Base Diameters

| Steel                                                    | Stainless        | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|------------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-6" Stud and Rubber Pad</b> |                  |      |          |     |       |    |       |   |      |     |     |
| IL98-M8GX6-H-P                                           | IL98-M8SX6-H-P   | 3000 | M8X1.25  | 1/4 | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-M10GX6-H-P                                          | IL98-M10SX6-H-P  | 3000 | M10X1.50 | 1/2 | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-M12GX6-H-P                                          | IL98-M12SX6-H-P  | 3000 | M12X1.75 | 1/2 | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-M16GX6-H-P                                          | IL98-M16SX6-H-P  | 3000 | M16X2.00 | 5/8 | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-M20GX6-H-P                                          | IL98-M20SX6-H-P  | 3000 | M20X2.50 | 3/4 | 1 1/4 | 4  | 7 1/4 | 6 | 3/16 | .51 | 2.9 |
| IL98-M24GX6-H-P                                          | IL98-M24SX6-H-P  | 3000 | M24X3.00 | 1   | 1 1/2 | 4  | 7 1/2 | 6 | 7/16 | .51 | 2.9 |
| IL98A-M8GX6-H-P                                          | IL98A-M8SX6-H-P  | 3000 | M8X1.25  | 1/4 | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-M10GX6-H-P                                         | IL98A-M10SX6-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-M12GX6-H-P                                         | IL98A-M12SX6-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-M16GX6-H-P                                         | IL98A-M16SX6-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-M20GX6-H-P                                         | IL98A-M20SX6-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 6  | 7 1/4 | 6 | 3/16 | .51 | 4.9 |
| IL98A-M24GX6-H-P                                         | IL98A-M24SX6-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 6  | 7 1/2 | 6 | 7/16 | .51 | 4.9 |
| IL98B-M8GX6-H-P                                          | IL98B-M8SX6-H-P  | 3000 | M8X1.25  | 1/4 | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-M10GX6-H-P                                         | IL98B-M10SX6-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-M12GX6-H-P                                         | IL98B-M12SX6-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-M16GX6-H-P                                         | IL98B-M16SX6-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-M20GX6-H-P                                         | IL98B-M20SX6-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 8  | 7 1/4 | 6 | 3/16 | .51 | 6.9 |
| IL98B-M24GX6-H-P                                         | IL98B-M24SX6-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 8  | 7 1/2 | 6 | 7/16 | .51 | 6.9 |
| IL98C-M8GX6-H-P                                          | IL98C-M8SX6-H-P  | 3000 | M8X1.25  | 1/4 | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-M10GX6-H-P                                         | IL98C-M10SX6-H-P | 3000 | M10X1.50 | 1/2 | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-M12GX6-H-P                                         | IL98C-M12SX6-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-M16GX6-H-P                                         | IL98C-M16SX6-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-M20GX6-H-P                                         | IL98C-M20SX6-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 10 | 7 1/4 | 6 | 3/16 | .51 | 8.9 |
| IL98C-M24GX6-H-P                                         | IL98C-M24SX6-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 10 | 7 1/2 | 6 | 7/16 | .51 | 8.9 |

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |



**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

## MEDIUM-DUTY LEVELERS

NYLON SWIVEL

METRIC - 8" STUD

### NYLON METRIC SWIVEL STUD STYLE

#### LEVELERS – with Rubber Pad

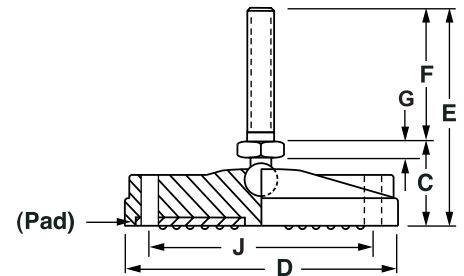
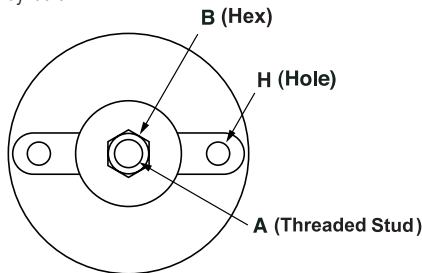
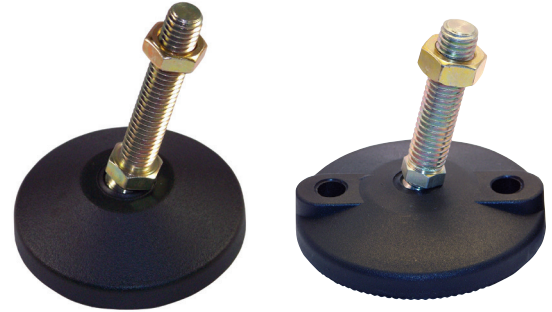

The IEC *Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

#### Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

#### Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



#### Metric Threads: 1" to 4" Base Diameters

| Steel                                                    | Stainless       | Load | A        | B   | C     | D     | E     | F | G    | H   | J   |
|----------------------------------------------------------|-----------------|------|----------|-----|-------|-------|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers—8" Stud and Rubber Pad</b> |                 |      |          |     |       |       |       |   |      |     |     |
| IL90-M12GX8-P                                            | IL90-M12SX8-P   | 2000 | M12X1.75 | 1/2 | 1     | 1     | 9     | 8 | 3/16 | -   | -   |
| IL90-M16GX8-P                                            | IL90-M16SX8-P   | 2000 | M16X2.00 | 5/8 | 1     | 1     | 9     | 8 | 3/16 | -   | -   |
| IL90-M20GX8-P                                            | IL90-M20SX8-P   | 2000 | M20X2.50 | 3/4 | 1     | 1     | 9     | 8 | 3/16 | -   | -   |
| IL90-M24GX8-P                                            | IL90-M24SX8-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1     | 9 1/4 | 8 | 7/16 | -   | -   |
| IL92-M12GX8-P                                            | IL92-M12SX8-P   | 2000 | M12X1.75 | 1/2 | 1     | 1 1/2 | 9     | 8 | 3/16 | -   | -   |
| IL92-M16GX8-P                                            | IL92-M16SX8-P   | 2000 | M16X2.00 | 5/8 | 1     | 1 1/2 | 9     | 8 | 3/16 | -   | -   |
| IL92-M20GX8-P                                            | IL92-M20SX8-P   | 2000 | M20X2.50 | 3/4 | 1     | 1 1/2 | 9     | 8 | 3/16 | -   | -   |
| IL92-M24GX8-P                                            | IL92-M24SX8-P   | 2000 | M24X3.00 | 1   | 1 1/4 | 1 1/2 | 9 1/4 | 8 | 7/16 | -   | -   |
| IL94-M12GX8-P                                            | IL94-M12SX8-P   | 2500 | M12X1.75 | 1/2 | 1     | 2 3/8 | 9     | 8 | 3/16 | -   | -   |
| IL94-M16GX8-P                                            | IL94-M16SX8-P   | 2500 | M16X2.00 | 5/8 | 1     | 2 3/8 | 9     | 8 | 3/16 | -   | -   |
| IL94-M20GX8-P                                            | IL94-M20SX8-P   | 2500 | M20X2.50 | 3/4 | 1     | 2 3/8 | 9     | 8 | 3/16 | -   | -   |
| IL94-M24GX8-P                                            | IL94-M24SX8-P   | 2500 | M24X3.00 | 1   | 1 1/4 | 2 3/8 | 9 1/4 | 8 | 7/16 | -   | -   |
| IL96-M12GX8-H-P                                          | IL96-M12SX8-H-P | 3000 | M12X1.75 | 1/2 | 1     | 3 1/8 | 9     | 8 | 3/16 | .39 | 2.2 |
| IL96-M16GX8-H-P                                          | IL96-M16SX8-H-P | 3000 | M16X2.00 | 5/8 | 1     | 3 1/8 | 9     | 8 | 3/16 | .39 | 2.2 |
| IL96-M20GX8-H-P                                          | IL96-M20SX8-H-P | 3000 | M20X2.50 | 3/4 | 1     | 3 1/8 | 9     | 8 | 3/16 | .39 | 2.2 |
| IL96-M24GX8-H-P                                          | IL96-M24SX8-H-P | 3000 | M24X3.00 | 1   | 1 1/4 | 3 1/8 | 9 1/4 | 8 | 7/16 | .39 | 2.2 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."

To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

**MEDIUM-DUTY LEVELERS**

NYLON SWIVEL

METRIC - 8" STUD

**NYLON METRIC SWIVEL STUD STYLE  
LEVELERS – with Rubber Pad**

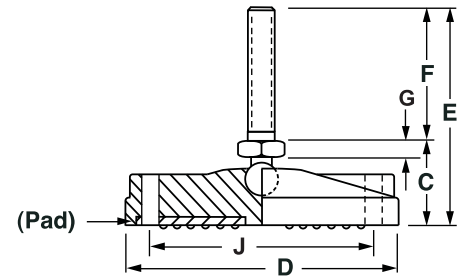
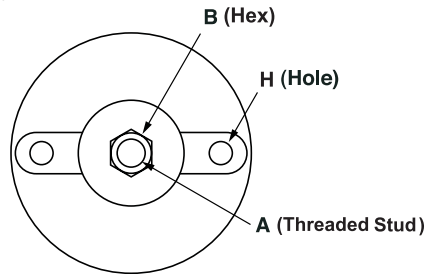

The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

**Features**

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

**Metric Threads: 4", 6", 8" & 10" Base Diameters**

| Steel                                                    | Stainless        | Load | A        | B   | C     | D  | E     | F | G    | H   | J   |
|----------------------------------------------------------|------------------|------|----------|-----|-------|----|-------|---|------|-----|-----|
| <b>Nylon Swivel Stud Levelers-8" Stud and Rubber Pad</b> |                  |      |          |     |       |    |       |   |      |     |     |
| IL98-M12GX8-H-P                                          | IL98-M12SX8-H-P  | 3000 | M12X1.75 | 1/2 | 1 1/4 | 4  | 9 1/4 | 8 | 3/16 | .51 | 2.9 |
| IL98-M16GX8-H-P                                          | IL98-M16SX8-H-P  | 3000 | M16X2.00 | 5/8 | 1 1/4 | 4  | 9 1/4 | 8 | 3/16 | .51 | 2.9 |
| IL98-M20GX8-H-P                                          | IL98-M20SX8-H-P  | 3000 | M20X2.50 | 3/4 | 1 1/4 | 4  | 9 1/4 | 8 | 3/16 | .51 | 2.9 |
| IL98-M24GX8-H-P                                          | IL98-M24SX8-H-P  | 3000 | M24X3.00 | 1   | 1 1/2 | 4  | 9 1/2 | 8 | 7/16 | .51 | 2.9 |
| IL98A-M12GX8-H-P                                         | IL98A-M12SX8-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 6  | 9 1/4 | 8 | 3/16 | .51 | 4.9 |
| IL98A-M16GX8-H-P                                         | IL98A-M16SX8-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 6  | 9 1/4 | 8 | 3/16 | .51 | 4.9 |
| IL98A-M20GX8-H-P                                         | IL98A-M20SX8-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 6  | 9 1/4 | 8 | 3/16 | .51 | 4.9 |
| IL98A-M24GX8-H-P                                         | IL98A-M24SX8-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 6  | 9 1/2 | 8 | 7/16 | .51 | 4.9 |
| IL98B-M12GX8-H-P                                         | IL98B-M12SX8-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 8  | 9 1/4 | 8 | 3/16 | .51 | 6.9 |
| IL98B-M16GX8-H-P                                         | IL98B-M16SX8-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 8  | 9 1/4 | 8 | 3/16 | .51 | 6.9 |
| IL98B-M20GX8-H-P                                         | IL98B-M20SX8-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 8  | 9 1/4 | 8 | 3/16 | .51 | 6.9 |
| IL98B-M24GX8-H-P                                         | IL98B-M24SX8-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 8  | 9 1/2 | 8 | 7/16 | .51 | 6.9 |
| IL98C-M12GX8-H-P                                         | IL98C-M12SX8-H-P | 3000 | M12X1.75 | 1/2 | 1 1/4 | 10 | 9 1/4 | 8 | 3/16 | .51 | 8.9 |
| IL98C-M16GX8-H-P                                         | IL98C-M16SX8-H-P | 3000 | M16X2.00 | 5/8 | 1 1/4 | 10 | 9 1/4 | 8 | 3/16 | .51 | 8.9 |
| IL98C-M20GX8-H-P                                         | IL98C-M20SX8-H-P | 3000 | M20X2.50 | 3/4 | 1 1/4 | 10 | 9 1/4 | 8 | 3/16 | .51 | 8.9 |
| IL98C-M24GX8-H-P                                         | IL98C-M24SX8-H-P | 3000 | M24X3.00 | 1   | 1 1/2 | 10 | 9 1/2 | 8 | 7/16 | .51 | 8.9 |

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

| Top Hex (Allen-drive) Thread & Hex Size |      |         |          |          |          |          |          |
|-----------------------------------------|------|---------|----------|----------|----------|----------|----------|
| Thread                                  | M6X1 | M8X1.25 | M10X1.50 | M12X1.75 | M16X2.00 | M20X2.50 | M24X3.00 |
| Hex Size                                | 3mm  | 4mm     | 5mm      | 6mm      | 8mm      | 10mm     | 12mm     |